INCOMPARABLE DEEP CYCLE AGM BATTERY


LDC12-140 (12V144Ah)







CHARACTERISTICS

Item		Specifications
Voltage		12V
Dimension	Length	408mm (16.1inches)
	Width	176mm (6.93inches)
	Container Height	224.5mm (8.84inches)
	Total Height	224.5mm (8.84inches)
Approx Weight		39.2kg (86.4lbs)
Terminal		T11(M8)
Container Material		ABS
Reserve Capacity	25A	321min
	56A	126min
Capacity	20HR	144Ah
	5HR	126Ah
Operating Temp. Range	Discharge	-20~55°C (-4~131°F)
	Charge	0~40°C (32~104°F)
	Storage	-15~40°C (5~104°F)











Note: Terminal Torque Values in-lb(Nm):97.28-130.0(11-14.7)

APPLICATIONS

- · Electric vehicle
- · Golf cart
- · Sightseeing
- · Cleaning equipment
- AWP
- Mobility

















INCOMPARABLE DEEP CYCLE AGM BATTERY



LDC12-140 (12V144Ah)

GENERAL FEATURES

Stable initial capacity

- · PAM/NAM amount optimization
- · 4BS crystal paste mixing & curing technology
- · Double layer separator technology
- · Improved design electrolyte S.G.

Less water loss

- PAM/NAM amount optimization
- · New PAM/NAM recipe introduced
- · Rare earth alloy

Solve NAM sulphation

- · Carbon boost technology
- · Pre-sulfate technology

Improved PSoC cycling

- · Carbon boost technology
- · Mix carbon boost technology
- Targeting for higher level through carbon technology

Delay PAM softening and shedding


- · Plate assembly pressure re-engineering
- · 4BS crystal paste mixing & curing technology
- · Higher paste density


Optimize electrolyte stratification


· Introduce AGM-GEL technology


Excellent deep cycle performance

- · Plate assembly pressure re-engineering
- · New PAM/NAM recipe introduced
- · Gel electrolyte technology
- · Rare earth alloy
- Double layer separator technology
- · Lower acid filling temperature

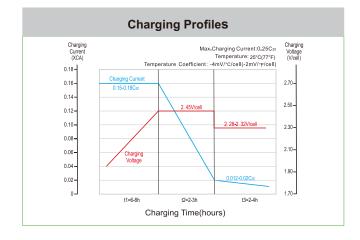

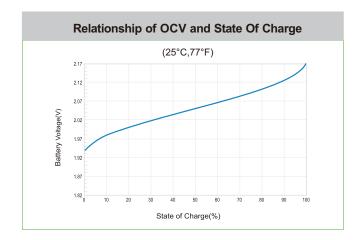

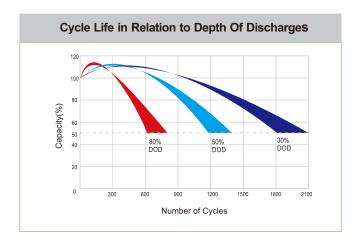

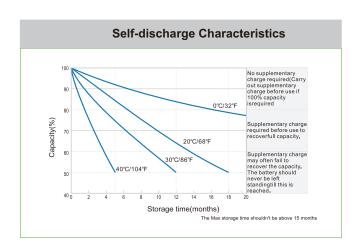

Leoch International Technology Ltd.

mww.leoch.com

Leoch Batteries Pte Ltd

www.leoch.sg

Leoch Battery Corporation

www.leochamericas.com

Leoch Europe S.A.

www.leoch.eu