



# INCOMPARABLE DEEP CYCLE AGM BATTERY

LDC12-26 (12V26Ah)






## CHARACTERISTICS

Item	Specifications	
Voltage	12V	
Dimension	Length	181mm (7.13inches)
	Width	76.5mm (3.01inches)
	Container Height	171mm (6.73inches)
	Total Height	171mm (6.73inches)
Approx Weight	6.85kg (15.1lbs)	
Terminal	T15(M5)	
Container Material	ABS	
Capacity	20HR	26Ah
	5HR	24Ah
Operating Temp. Range	Discharge	-20~55°C (-4~131°F)
	Charge	0~40°C (32~104°F)
	Storage	-15~40°C (5~104°F)

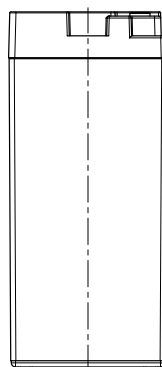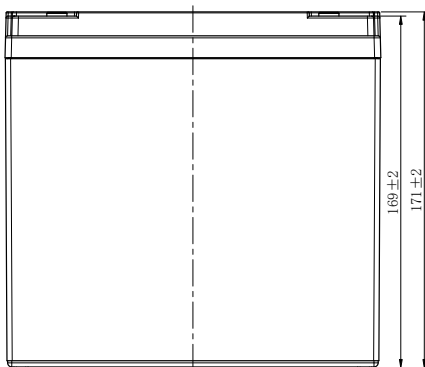

## APPLICATIONS

- Electric vehicle
- Golf cart
- Sightseeing
- Cleaning equipment
- AWP
- Mobility

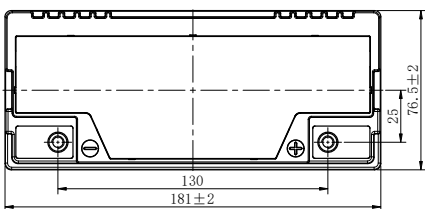

Note: Terminal Torque Values in-lb(Nm):17.69-26.53(2.0-3.0)



# INCOMPARABLE DEEP CYCLE AGM BATTERY

## LDC12-26 (12V26Ah)



### GENERAL FEATURES

#### Stable initial capacity

- PAM/NAM amount optimization
- 4BS crystal paste mixing & curing technology
- Double layer separator technology
- Improved design electrolyte S.G.

#### Improved PSoC cycling

- Carbon boost technology
- Mix carbon boost technology
- Targeting for higher level through carbon technology

#### Excellent deep cycle performance

- Plate assembly pressure re-engineering
- New PAM/NAM recipe introduced
- Gel electrolyte technology
- Rare earth alloy
- Double layer separator technology
- Lower acid filling temperature

#### Less water loss

- PAM/NAM amount optimization
- New PAM/NAM recipe introduced
- Rare earth alloy

#### Delay PAM softening and shedding





- Plate assembly pressure re-engineering
- 4BS crystal paste mixing & curing technology
- Higher paste density

#### Solve NAM sulphation

- Carbon boost technology
- Pre-sulfate technology

#### Optimize electrolyte stratification

- Introduce AGM-GEL technology

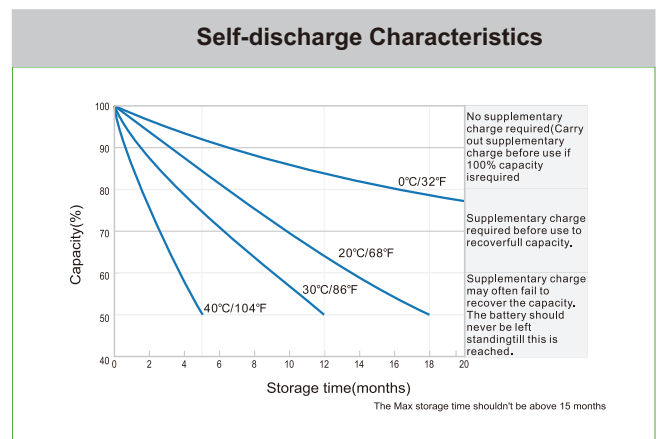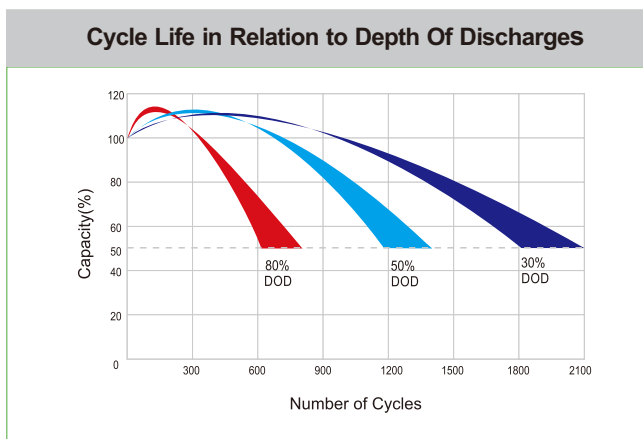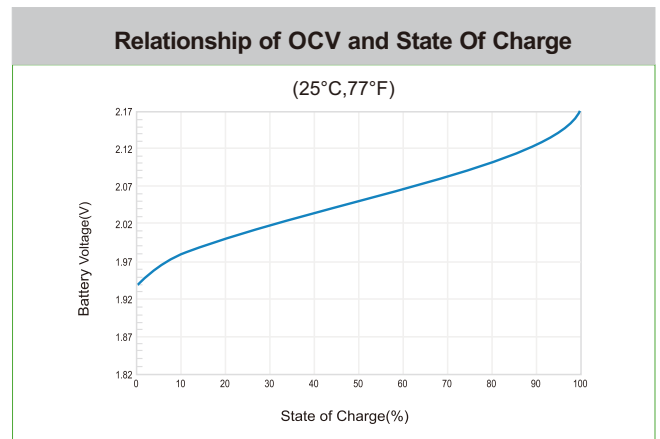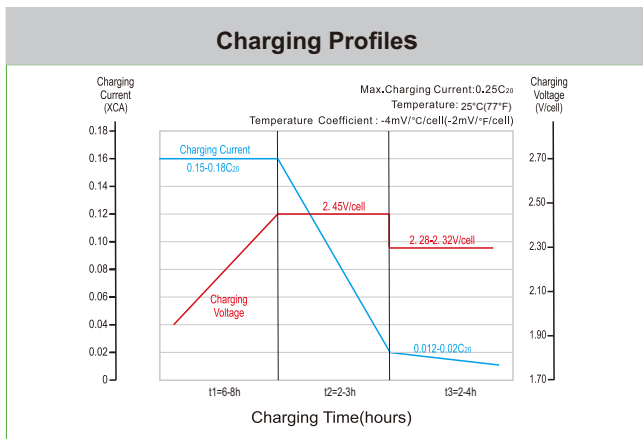

Leoch International Technology Ltd.  
www.leoch.com

Leoch Batteries Pte Ltd  
www.leoch.sg

Leoch Battery Corporation  
www.leochamericas.com

Leoch Europe S.A.  
www.leoch.eu