




INCOMPARABLE DEEP CYCLE AGM BATTERY

LDC6-350 (6V350Ah)



CHARACTERISTICS


| Item | Specifications | |
|-----------------------|-------------------|---------------------|
| Voltage | 6V | |
| Dimension | Length | 295mm (11.6inches) |
| | Width | 180mm (7.09inches) |
| | Container Height | 346mm (13.6inches) |
| | Total Height | 368mm (14.5inches) |
| Approx Weight | 48.2kg (106.3lbs) | |
| Terminal | DT(3/8") | |
| Container Material | PP | |
| Reserve Capacity | 25A | 820min |
| | 75A | 240min |
| Capacity | 20HR | 350Ah |
| | 5HR | 305Ah |
| Operating Temp. Range | Discharge | -20~55°C (-4~131°F) |
| | Charge | 0~40°C (32~104°F) |
| | Storage | -15~40°C (5~104°F) |

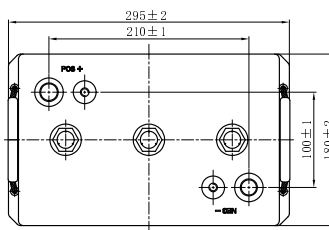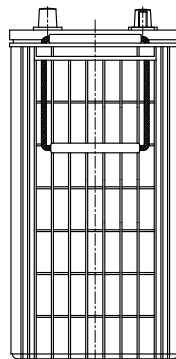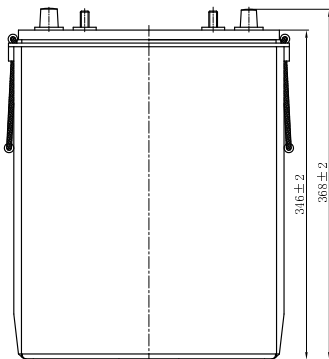

| Terminal | |
|----------|-------------------------------|
| D | Positive 19.5 ^{±0.3} |
| D | Negative 17.9 ^{±0.3} |

APPLICATIONS

- Electric vehicle
- Golf cart
- Sightseeing
- Cleaning equipment
- AWP
- Mobility



Note: Terminal Torque Values in-lb(Nm):176-203(20-23)



INCOMPARABLE DEEP CYCLE AGM BATTERY

LDC6-350 (6V350Ah)



GENERAL FEATURES

Stable initial capacity

- PAM/NAM amount optimization
- 4BS crystal paste mixing & curing technology
- Double layer separator technology
- Improved design electrolyte S.G.

Less water loss

- PAM/NAM amount optimization
- New PAM/NAM recipe introduced
- Rare earth alloy

Solve NAM sulphation

- Carbon boost technology
- Pre-sulfate technology

Improved PSoC cycling

- Carbon boost technology
- Mix carbon boost technology
- Targeting for higher level through carbon technology

Delay PAM softening and shedding

- Plate assembly pressure re-engineering
- 4BS crystal paste mixing & curing technology
- Higher paste density


Optimize electrolyte stratification

- Introduce AGM-GEL technology


Excellent deep cycle performance

- Plate assembly pressure re-engineering
- New PAM/NAM recipe introduced
- Gel electrolyte technology
- Rare earth alloy
- Double layer separator technology
- Lower acid filling temperature


Charging Profiles

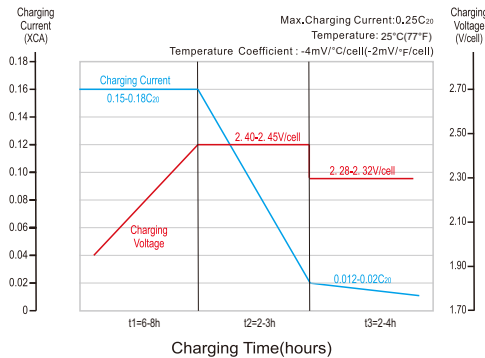


Relationship of OCV and State Of Charge

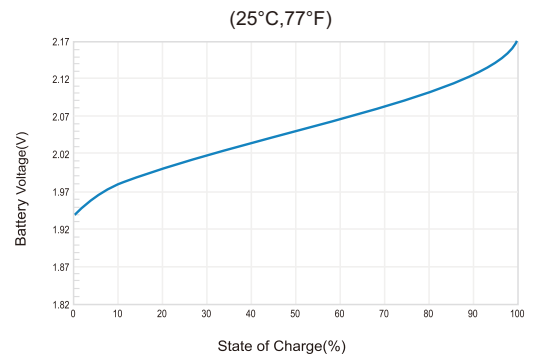

Cycle Life in Relation to Depth Of Discharges

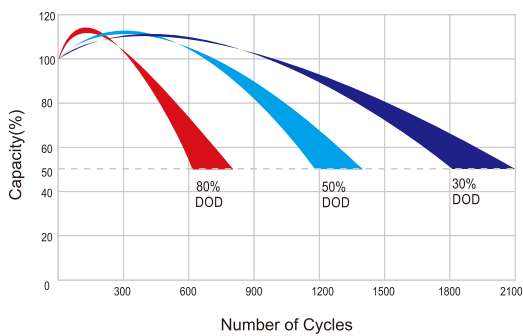

Self-discharge Characteristics

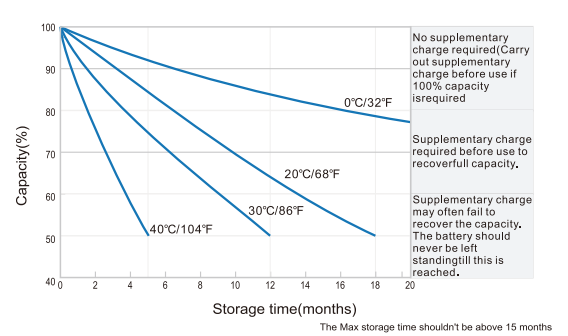

Leoch International Technology Ltd.
www.leoch.com

Leoch Batteries Pte Ltd
www.leoch.sg

Leoch Battery Corporation
www.leochamericas.com

Leoch Europe S.A.
www.leoch.eu