


# LPC SERIES-CYCLE APPLICATION

## LPC12-12 (12V12Ah)



### CHARACTERISTICS

Item	Specifications	
Voltage	12V	
Dimension	Length	151mm (5.94inches)
	Width	98mm (3.86inches)
	Container Height	95mm (3.74inches)
	Total Height	101mm (3.98inches)
Approx Weight	3.43kg (7.56lbs)	
Terminal	T1/T2	
Container Material	ABS	
Short-circuit current	336A	
Internal Resistance (25°C)	≤ 16 mΩ	
Self Discharge	≤3% per month at 25°C (77°F)	
Capacity	20HR	12Ah
	10HR	11.3Ah
	5HR	10.2Ah
Operating Temp. Range	Discharge	-20~55°C (-4~131°F)
	Charge	0~40°C (32~104°F)
	Storage	-20~50°C (-4~122°F)

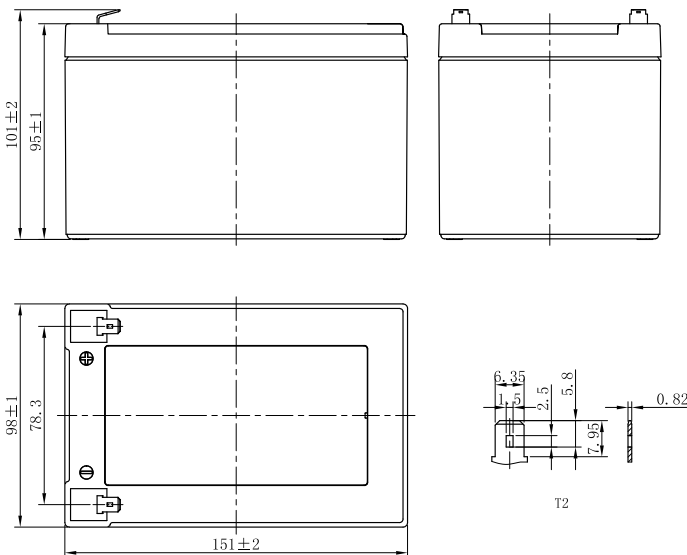

### APPLICATIONS

- Electric tool
- Mobility Scooter
- Golf trolley
- Portable lights and instrument
- Electric toy
- Portable power
- Electric wheelchair

### STANDARDS

- ACC. to BCI standards
- Manufactured in Leoch® IATF16949, ISO 9001, ISO 14001 and ISO 45001 certified production facilities


# LPC SERIES-CYCLE APPLICATION

## LPC12-12 (12V12Ah)


### GENERAL FEATURES

- Good cyclic property: Enhanced overcharge endurance and overdischarge recovery property
- Using oxygen recombination technology: maintenance-free
- Lower acid density, excess of electrolyte and larger distance between plates to keep battery at low temperature and slow down plate grid corrosion speed
- Unique plate group configuration, high quality AGM separator and battery management system ensure battery with a longer service life


#### Discharge Characteristics

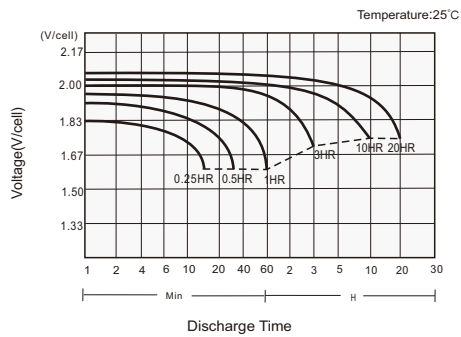

#### Charging Characteristics

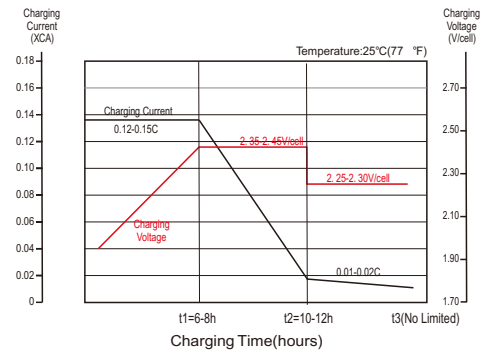

#### Cycle Life in Relation to Depth of Discharge

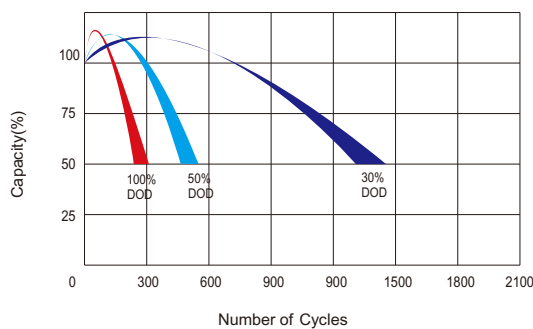

#### Self Discharge Characteristics

