


LPC SERIES-CYCLE APPLICATION

LPC12-120 (12V120Ah)



CHARACTERISTICS

Item	Specifications	
Voltage	12V	
Dimension	Length	408mm (16.1inches)
	Width	177mm (6.97inches)
	Container Height	225mm (8.86inches)
	Total Height	225mm (8.86inches)
Approx Weight	37.3kg (82.2lbs)	
Terminal	T11(M8)	
Container Material	ABS	
Short-circuit current	2400A	
Internal Resistance (25°C)	≤ 3.6 mΩ	
Self Discharge	≤3% per month at 25°C (77°F)	
Capacity	20HR	126Ah
	10HR	120Ah
	5HR	97.8Ah
Operating Temp. Range	Discharge	-20~55°C (-4~131°F)
	Charge	0~40°C (32~104°F)
	Storage	-20~50°C (-4~122°F)

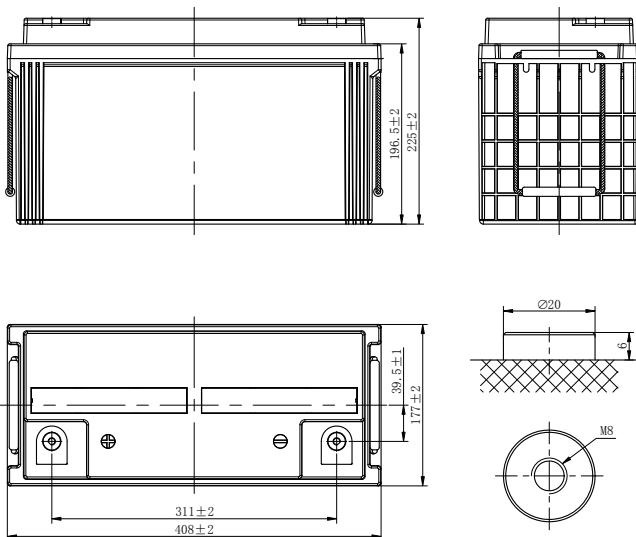

T11

APPLICATIONS

- Electric tool
- Mobility Scooter
- Golf trolley
- Portable lights and instrument
- Electric toy
- Portable power
- Electric wheelchair

STANDARDS

- ACC. to BCI standards
- Manufactured in Leoch® IATF16949, ISO 9001, ISO 14001 and ISO 45001 certified production facilities


LPC SERIES-CYCLE APPLICATION

LPC12-120 (12V120Ah)


GENERAL FEATURES

- Good cyclic property: Enhanced overcharge endurance and overdischarge recovery property
- Using oxygen recombination technology: maintenance-free
- Lower acid density, excess of electrolyte and larger distance between plates to keep battery at low temperature and slow down plate grid corrosion speed
- Unique plate group configuration, high quality AGM separator and battery management system ensure battery with a longer service life


Discharge Characteristics

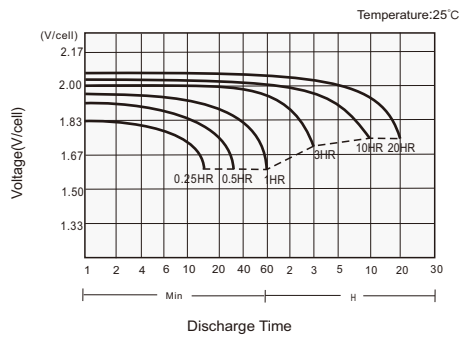

Charging Characteristics

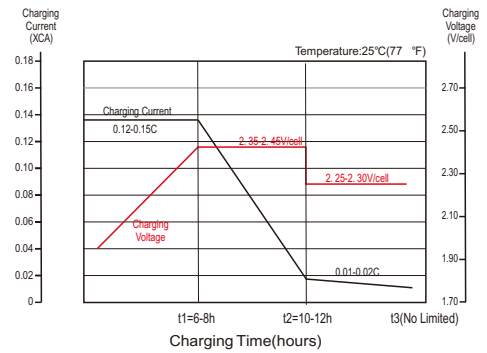

Cycle Life in Relation to Depth of Discharge

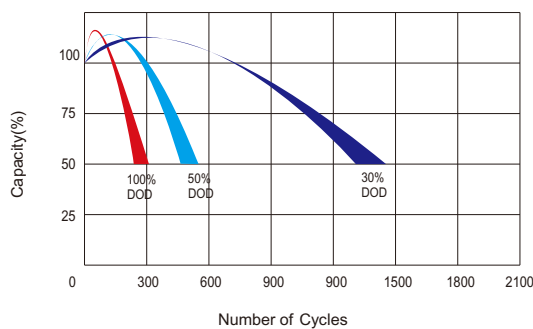

Self Discharge Characteristics

