



LPC SERIES-CYCLE APPLICATION

LPC12-150 (12V150Ah)



CHARACTERISTICS

Item	Specifications	
Voltage	12V	
Dimension	Length	483mm (19.0inches)
	Width	170mm (6.69inches)
	Container Height	238.5mm (9.39inches)
	Total Height	238.5mm (9.39inches)
Approx Weight	43.2kg (95.2lbs)	
Terminal	T11(M8)	
Container Material	ABS	
Short-circuit current	3000A	
Internal Resistance (25°C)	≤ 3.5 mΩ	
Self Discharge	≤3% per month at 25°C (77°F)	
Capacity	20HR	157.6Ah
	10HR	150Ah
	5HR	136.5Ah
Operating Temp.Range	Discharge	-20~55°C (-4~131°F)
	Charge	0~40°C (32~104°F)
	Storage	-20~50°C (-4~122°F)

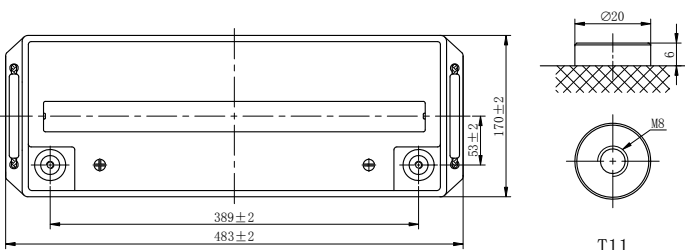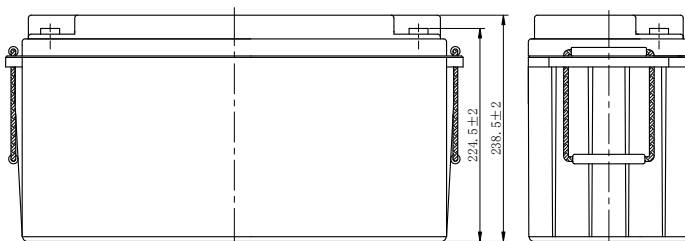

APPLICATIONS

- Electric tool
- Mobility Scooter
- Golf trolley
- Portable lights and instrument
- Electric toy
- Portable power
- Electric wheelchair

STANDARDS

- ACC. to BCI standards
- Manufactured in Leoch® IATF16949, ISO 9001, ISO 14001 and ISO 45001 certified production facilities


LPC SERIES-CYCLE APPLICATION

LPC12-150 (12V150Ah)


GENERAL FEATURES

- Good cyclic property: Enhanced overcharge endurance and overdischarge recovery property
- Using oxygen recombination technology: maintenance-free
- Lower acid density, excess of electrolyte and larger distance between plates to keep battery at low temperature and slow down plate grid corrosion speed
- Unique plate group configuration, high quality AGM separator and battery management system ensure battery with a longer service life


Discharge Characteristics

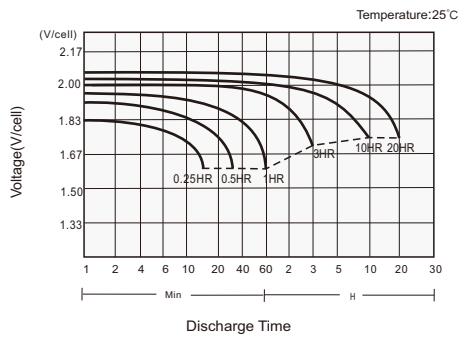

Charging Characteristics

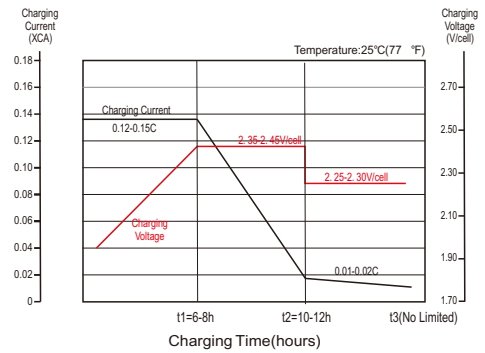

Cycle Life in Relation to Depth of Discharge

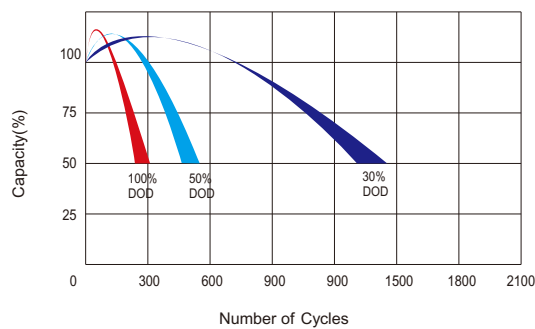

Self Discharge Characteristics

