

LPC SERIES-CYCLE APPLICATION

LPC6-13 (6V14Ah)



CHARACTERISTICS


Item	Specifications	
Voltage	6V	
Dimension	Length	151mm (5.94inches)
	Width	50.5mm (1.99inches)
	Container Height	94mm (3.70inches)
	Total Height	100mm (3.94inches)
Approx Weight	1.9kg (4.19lbs)	
Terminal	T1/T2	
Container Material	ABS	
Short-circuit current	392A	
Internal Resistance (25°C)	≤ 10 mΩ	
Self Discharge	≤3% per month at 25°C (77°F)	
	20HR	14Ah
	10HR	13.2Ah
	5HR	12.1Ah
Operating Temp. Range	Discharge	-20~55°C (-4~131°F)
	Charge	0~40°C (32~104°F)
	Storage	-20~50°C (-4~122°F)

APPLICATIONS

- Electric tool
- Mobility Scooter
- Golf trolley
- Portable lights and instrument
- Electric toy
- Portable power
- Electric wheelchair

STANDARDS

- ACC. to BCI standards
- Manufactured in Leoch® IATF16949, ISO 9001, ISO 14001 and ISO 45001 certified production facilities

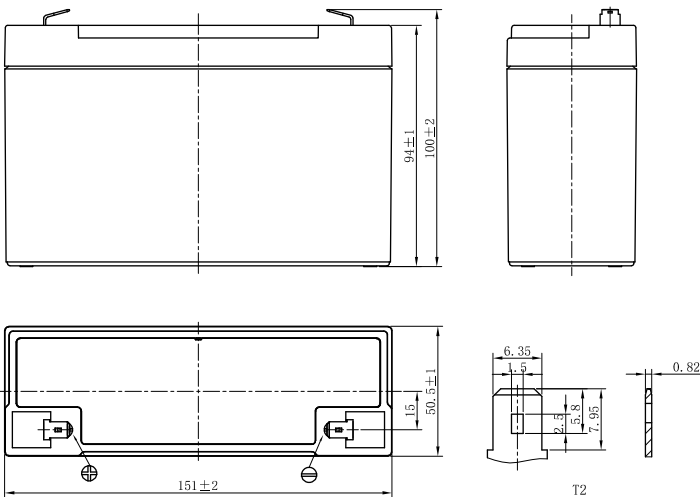


LPC SERIES-CYCLE APPLICATION

LPC6-13 (6V14Ah)


GENERAL FEATURES

- Good cyclic property: Enhanced overcharge endurance and overdischarge recovery property
- Using oxygen recombination technology: maintenance-free
- Lower acid density, excess of electrolyte and larger distance between plates to keep battery at low temperature and slow down plate grid corrosion speed
- Unique plate group configuration, high quality AGM separator and battery management system ensure battery with a longer service life


Discharge Characteristics

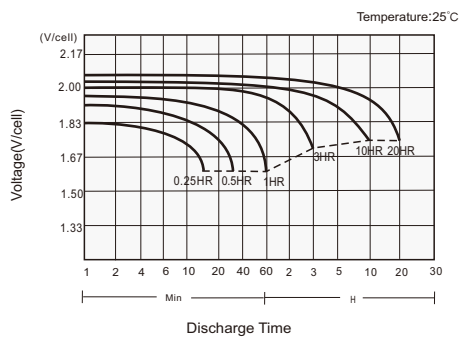

Charging Characteristics

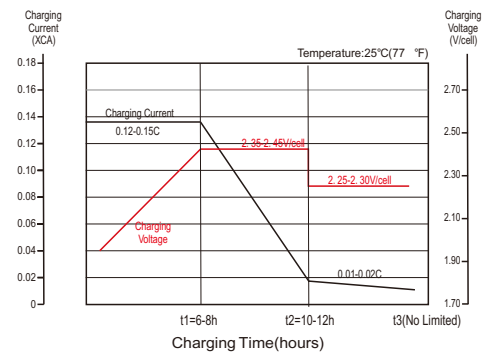

Cycle Life in Relation to Depth of Discharge

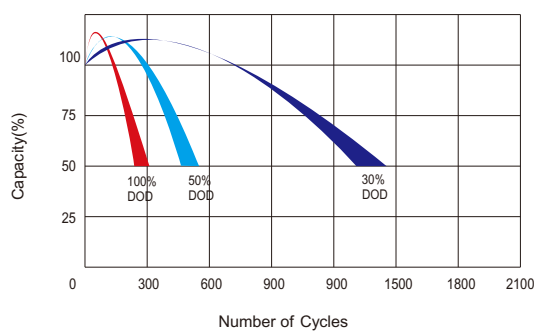

Self Discharge Characteristics

