


# TRACTION BATTERY

## 8PzS1240 (2V1240Ah)

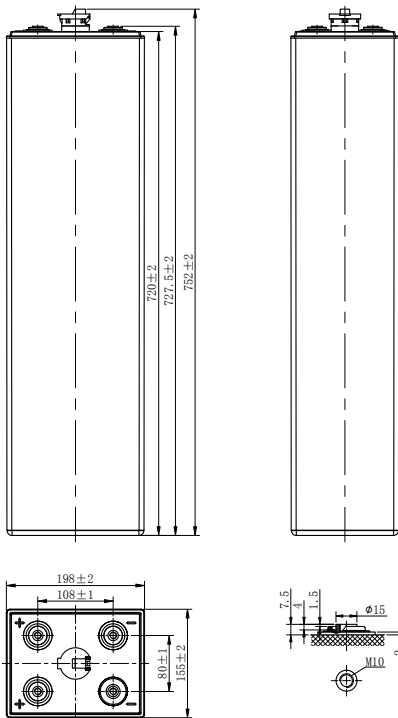

### CHARACTERISTICS

Item	Specifications	
Rated Voltage		2V
Capacity@25°C (86°F)	C <sub>5</sub> , 1.70V/cell	1240Ah
Dimension	Length	155mm (6.10inches)
	Width	198mm (7.80inches)
	Container Height	720mm (28.3inches)
	Total Height	752mm (29.6inches)
Approx Weight	Without Electrolyte	46.2kg (101.9lbs)
	With Electrolyte	63.7kg (140.4lbs)
Terminal		M10
Container Material		PP
Max. Discharge Current (5s)		8C <sub>5</sub>
Operating Temp. Range	Discharge	-15~55°C(5~131°F)
	Charge	0~50°C(32~122°F)
	Storage	5~40°C(41~104°F)
Cycle life		≥1200 cycles
Cycle Use	Initial Charging Current	less than 0.14C <sub>5</sub>
	Voltage	2.60V-2.65V at 25°C(77°F)
	Temp. Coefficient	-5mV/°C
Capacity affected by Temperature	40°C(104°F)	103%
	30°C(86°F)	100%
	0°C(32°F)	86%
Self Discharge	Less than 8% C <sub>5</sub> after storing 28 days at 20°C, and then a freshening charge is required. For higher temperature, the time interval will be shorter.	

### APPLICATIONS

- Forklift
- Traction vehicle
- Transportation vehicle
- Tram
- Bus
- Gymnastic and recreation location

### GENERAL FEATURES


- Nonwoven protective gauntlet, better elastic property, less pore size, less electrical resistance and higher air permeability
- Flexible, fully isolated connector prevents any creeping current
- Flip top plugs with special electrolyte level indication
- Automatic refilling plugs are also available (according request)
- Imported microporous catercome rseparator with advanced quality provides higher porosity and lower electrical resistance
- Containers and lids are made of polypropylene (PP)The impact resistance is very good
- Patented terminal sealing construction fully prevents plate growth and electrolyte leakage

# TRACTION BATTERY


## 8PzS1240 (2V1240Ah)



### Discharge Characteristics

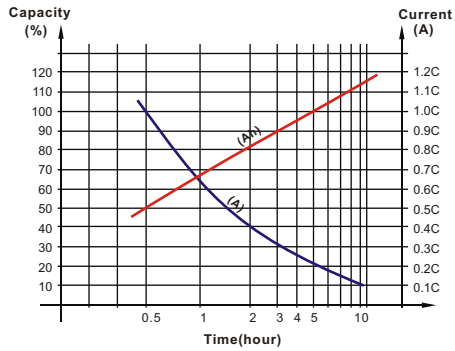


### Electrolyte Density in Relation to Voltage

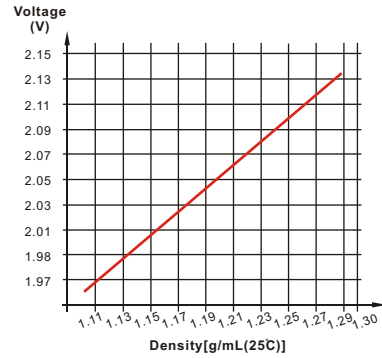

### Electrolyte Density in Relation to Capacity



### Temperature in Relation to Battery Capacity

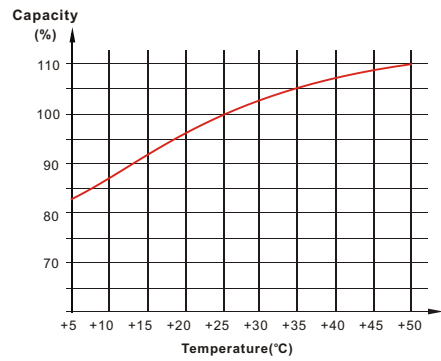

### Discharge Characteristics



### Cycle Life in Relation to Depth of Discharge



Leoch International Technology Ltd.  
[www.leoch.com](http://www.leoch.com)

Leoch Batteries Pte Ltd  
[www.leoch.sg](http://www.leoch.sg)

Leoch Battery Corporation  
[www.leoch.us](http://www.leoch.us)

Leoch Europe S.A.  
[www.leoch.eu](http://www.leoch.eu)