


### Physical Specification


Nominal Voltage	8V
Nominal Capacity(20HR)	240Ah
Nominal Capacity(5HR)	190Ah
Length	260±2mm(10.24inches)
Width	180±2mm(7.09inches)
Container Height	285±2mm(11.22inches)
Total Height	316.5±2mm(12.46inches)
Dry Weight	Approx 27.9Kg(61.5lbs)
Wet Weight	Approx 35.9Kg(79.2lbs)
Acid	1.280±0.015g/cm <sup>3</sup> (25℃)
Standard Terminal	MT
Container Material	PP

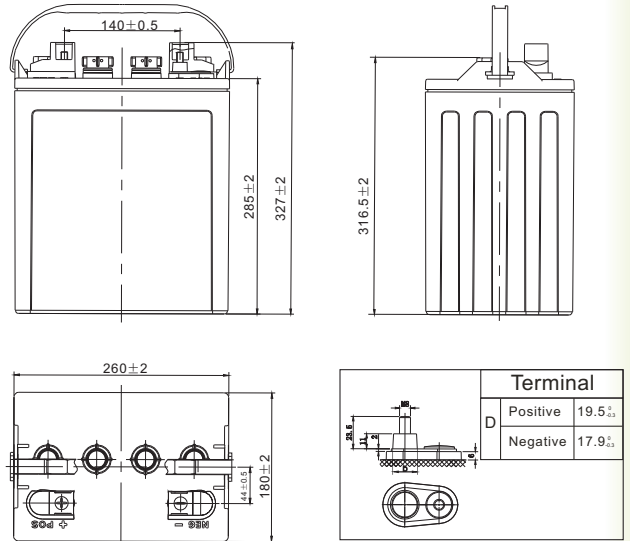

### Electrical Specification

Rated Capacity	20 hour rate(12A)	240Ah
	5 hour rate(38A)	190Ah
Reserve Capacity	25Amps	415min
	75Amps	110min

### Discharge Characteristics(25℃, 77°F)

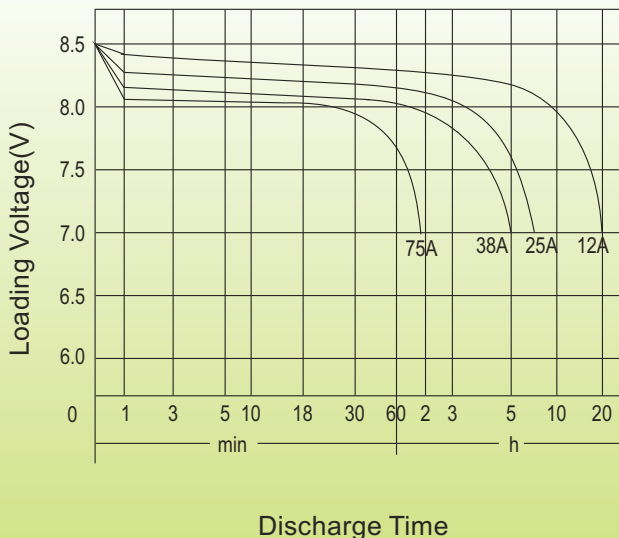

### Charge Method

#### Initial Charge:

- ①0.1C<sub>20</sub>(A) charging 15h
- ②0.05C<sub>20</sub>(A) charging 10h

The temperature of the battery should be below 50℃ during charging.

#### Supplement Charge:

a)Charging at a constant voltage of 9.8~10V/cell and a limited current 0.25C<sub>20</sub>(A) until the electrolyte density up to 1.280g/cm<sup>3</sup>(30℃) and the current not change for 3 hours.

b)Charge with constant current 0.1C<sub>20</sub>(A) until the voltage between 10.4~11.2V/cell, and voltage maintains for 3 hours and not change.

Two method optional