
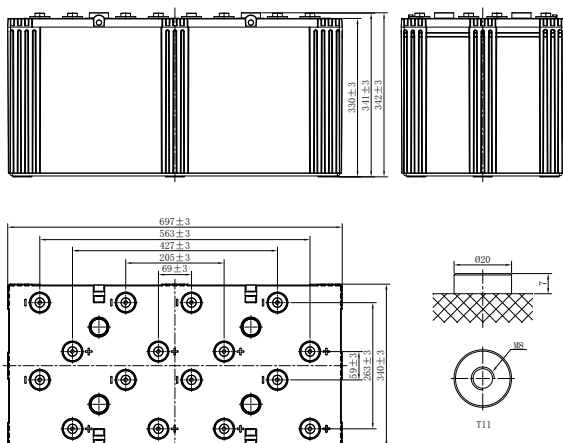


LPL SERIES-LONG LIFE STANDBY

LPL2-3000M (2V3000Ah)

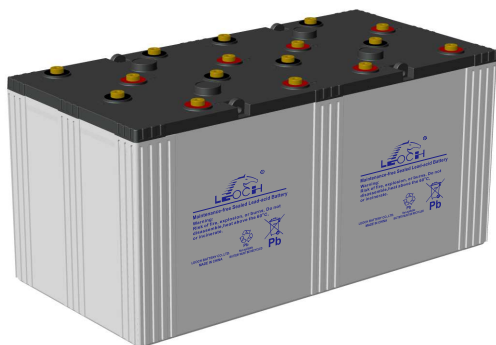

CHARACTERISTICS

Item	Specifications	
Rated Voltage	2V	
Nominal Capacity (25°C)	C ₁₀ 1.80V/cell	3000Ah
Dimension	Length	697mm (27.4inches)
	Width	340mm (13.4inches)
	Container Height	330mm (13.0inches)
	Total Height	342mm (13.5inches)
Approx Weight	179.1kg (394.8lbs)	
Terminal	T11(M8)	
Container Material	ABS (UL94 HB or V-0 optional)	
Short-circuit current	24000A	
Internal Resistance (25°C)	Approx 0.2 mΩ (Fully charged)	
Operating Temp. Range	Discharge	-15~50°C (5~122°F)
	Charge	-20~40°C (-4~104°F)
	Storage	-15~40°C (5~104°F)
Nominal Operating Temp. Range	25±3°C (77±5°F)	
Max.Charging Current (25°C)	0.3C	
Charge voltage (25°C)	Float Charge	Equalization Charge
	2.25-2.30V/cell	2.35-2.40V/cell
Temp. Coefficient	-3mV/cell/°C	-5mV/cell/°C
	40°C (104°F)	103%
Effect of temp. to Capacity	25°C (77°F)	100%
	0°C (32°F)	86%
Self Discharge	≤3% per month at 25°C (77°F). LPL series batteries may be stored up to 6 months at 25°C (77°F) and then a freshening charge is required. For higher temperatures the time interval will be shorter.	

DISCHARGE TABLE

Constant Current Discharge (Amperes) at 25°C (77°F)												
F.V/Time	30min	45min	1h	1.5h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	1890.0	1659.4	1481.9	1139.3	923.0	702.2	564.8	476.6	413.7	336.2	281.1	150.7
1.80V/cell	2170.7	1816.3	1631.1	1246.6	1004.2	752.7	608.8	513.3	443.8	360.0	300.0	159.0
1.75V/cell	2271.2	1852.5	1658.7	1288.5	1035.0	780.0	624.0	525.0	453.0	366.5	304.7	161.0
1.70V/cell	2417.8	1959.5	1724.2	1332.0	1068.0	802.8	639.7	537.0	462.8	373.1	309.4	163.1
1.67V/cell	2484.7	2064.9	1786.0	1356.1	1085.9	814.9	648.6	543.7	468.3	376.9	312.1	164.3
1.60V/cell	2531.0	2155.0	1851.6	1416.6	1131.1	844.9	670.2	560.3	481.4	385.9	318.8	167.2
Constant Power Discharge (Watts/cell) at 25°C (77°F)												
F.V/Time	30min	45min	1h	1.5h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	3470.8	3217.5	2880.6	2221.5	1803.9	1376.7	1109.9	938.2	815.7	664.4	556.3	299.6
1.80V/cell	3952.1	3496.0	3149.0	2416.7	1952.7	1469.8	1192.2	1007.5	872.7	709.9	592.8	315.9
1.75V/cell	4099.3	3538.3	3179.8	2482.7	2001.5	1516.6	1217.4	1027.2	888.5	721.4	601.0	319.7
1.70V/cell	4323.6	3713.2	3282.5	2551.3	2054.7	1553.7	1243.7	1047.6	905.4	732.6	609.4	323.4
1.67V/cell	4399.6	3893.3	3384.0	2587.5	2081.7	1572.7	1257.9	1058.3	914.5	739.3	614.1	325.7
1.60V/cell	4442.3	4020.4	3475.2	2680.7	2152.6	1621.1	1293.2	1086.0	936.3	754.4	625.5	331.1

LPL SERIES-LONG LIFE STANDBY

LPL2-3000M (2V3000Ah)



APPLICATIONS

- Tele-communication central station (wired or cellular)
- Power system communication, military communication, etc.
- Network communication including: data transmission, television signal transmission, etc.
- Uninterruptable Power System (UPS- for Telecom)
- EPS


GENERAL FEATURES

- 16 years design life (25°C)
- Lead calcium alloy, sealed design, no watering required
- Puncture resistant micro-porous glass mat separators extend life
- Unique technology optimizes power capacity, cell consistency, and long-term reliability
- Designed for a wide range of applications


STANDARDS

- Compliance with IEC 60896 standards, EU Battery Directive
- UL, CE Approved
- Manufactured in Leoch® IATF 16949, ISO 45001, ISO 9001 and ISO 14001 certified production facilities


Discharge Characteristics

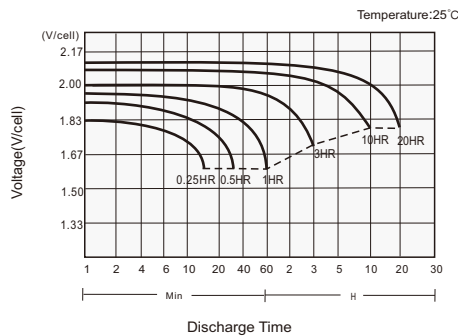

Charging Characteristics

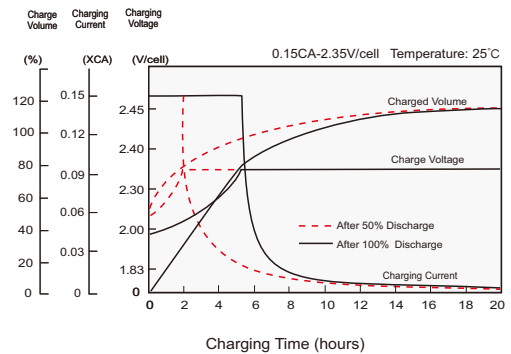

Effects of Temperature on Capacity

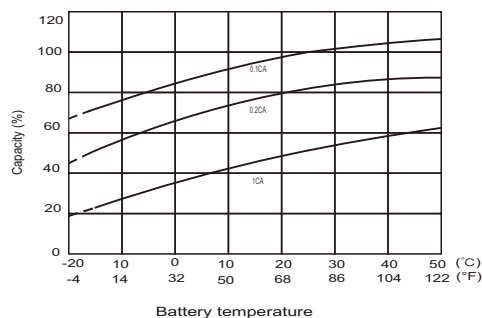

Self Discharge Characteristics

