




# LPF Series-Front Terminal

## LPF12-70(12V70Ah)




### Specifications

Rated Voltage	12V	
Nominal Capacity	$C_{10}, 1.80V/cell$	70.0Ah
Dimension	Length	564±2mm (22.2 inches)
	Width	114±2mm (4.49 inches)
	Container Height	187±2mm (7.36 inches)
	Total Height	187±2mm (7.36 inches)
Approx Weight	25.5 Kg (56.2 lbs)	
Terminal	M6	
Container Material	ABS	
Rated Capacity (25°C)	74.6 Ah	(20hr, 3.73A, 1.80V/cell)
	70.0 Ah	(10hr, 7.00A, 1.80V/cell)
	68.4 Ah	(8hr, 8.55A, 1.75V/cell)
	61.5 Ah	(5hr, 12.3A, 1.75V/cell)
	47.0 Ah	(1hr, 47.0A, 1.60V/cell)
Max. Discharge Current	700A (5s)	
Internal Resistance (25°C)	Approx 5.2mΩ	
Operating Temp. Range	Discharge	-15 ~ 50°C (5 ~ 122°F)
	Charge	-20 ~ 40°C (-4 ~ 104°F)
	Storage	-15 ~ 40°C (5 ~ 104°F)
Nominal Operating Temp. Range	25±3°C (77±5°F)	
Cycle Use	Initial Charging Current less than 21.0A. Voltage 14.1V~14.4V at 25°C(77°F)Temp. Coefficient -30mV/°C	
	Initial Charging Current less than 21.0A. Voltage 13.5V~13.8V at 25°C(77°F)Temp. Coefficient -20mV/°C	
Standby Use	Initial Charging Current less than 21.0A. Voltage 13.5V~13.8V at 25°C(77°F)Temp. Coefficient -20mV/°C	
Effect of temp. to Capacity	40°C (104°F)	103%
	25°C (77°F)	100%
	0°C (32°F)	86%
Self Discharge	LPF series batteries may be stored for up to 6 months at 25°C(77°F) and then a freshening charge is required. For higher temperatures the time interval will be shorter.	

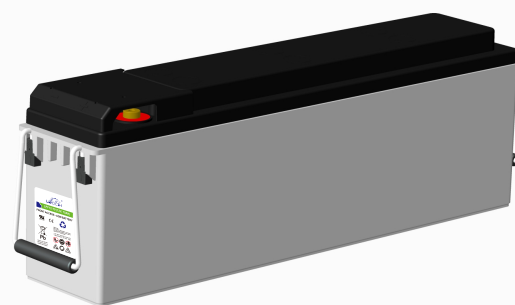

### Layout

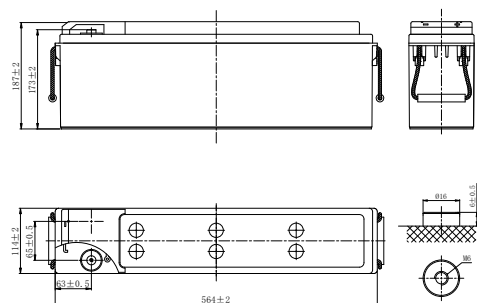

### Constant Current Discharge (Amperes) at 25 °C (77°F)

F.V/Time	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	104.6	91.6	81.3	64.7	49.8	36.9	22.1	16.7	13.3	11.1	10.0	7.85	6.56	3.52
1.80V/cell	123.9	106.4	91.8	71.3	53.6	40.8	24.1	18.1	14.3	12.0	10.6	8.40	7.00	3.73
1.75V/cell	135.2	115.4	97.0	74.2	55.2	42.3	24.8	18.6	14.7	12.3	10.7	8.55	7.11	3.76
1.70V/cell	143.6	120.4	100.6	76.6	56.6	43.9	25.6	19.1	15.1	12.5	10.8	8.70	7.22	3.80
1.67V/cell	149.1	123.5	103.5	78.0	57.5	44.8	26.0	19.4	15.3	12.7	10.8	8.80	7.28	3.83
1.60V/cell	153.3	130.2	105.8	79.4	58.6	47.0	27.1	20.1	15.8	13.1	10.9	9.00	7.44	3.90

### Constant Power Discharge (Watts/cell) at 25 °C (77°F)

F.V/Time	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	199.2	176.1	157.5	126.2	97.7	71.7	43.3	32.7	26.1	21.9	20.1	15.5	13.0	6.99
1.80V/cell	234.3	203.3	176.8	138.4	104.6	78.8	46.8	35.3	28.1	23.5	21.1	16.6	13.8	7.37
1.75V/cell	253.9	219.0	186.1	143.5	107.4	81.1	48.0	36.1	28.7	24.0	21.3	16.8	14.0	7.46
1.70V/cell	266.1	226.0	190.9	146.7	109.2	83.5	49.3	36.9	29.3	24.4	21.5	17.1	14.2	7.55
1.67V/cell	272.0	228.4	194.0	147.8	109.9	84.9	49.9	37.4	29.6	24.7	21.7	17.2	14.3	7.60
1.60V/cell	273.7	230.2	195.7	148.5	111.3	88.2	51.6	38.6	30.5	25.3	21.9	17.6	14.6	7.73



# LPF Series-Front Terminal

## LPF12-70(12V70Ah)



### Applications

- UPS
- For standard power cabinet
- Network connection equipment of communication system
- Power system of special network of local area network
- Power station systems


### General Features

- 12 years design life(25°C)
- Specifically ideal for 19 inches or 23 inches power cabinets
- Front terminals make the installation, maintenance and supervision easy
- Shield designs protect terminals from short circuit and show good appearance
- Unique vent valve design: reduce water losing and prevent air/spark going inside


### Standards

- Compliance with IEC 60896 standards, EU Battery Directive
- UL, CE Certified
- Manufactured in Leoch@IATF16949, ISO 45001, ISO 9001 and ISO 14001 certified production facilities


### Discharge Characteristics

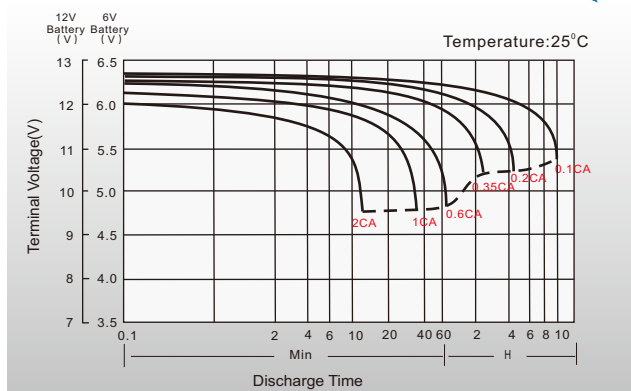


### Float Charging Characteristics

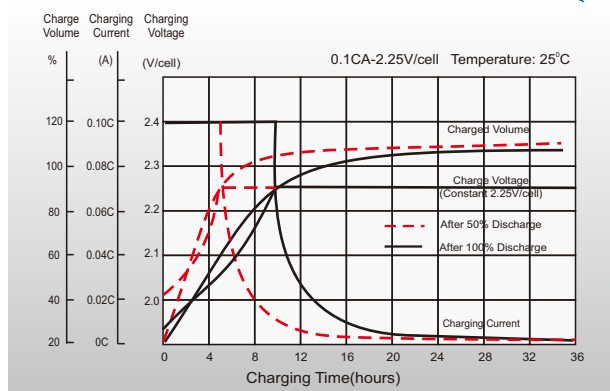

### Temperature Effects in Relation to Battery Capacity

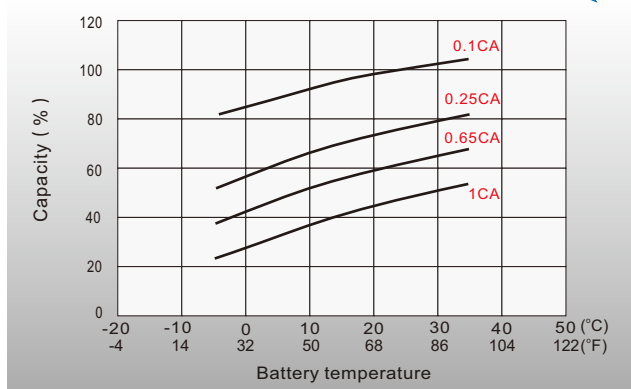

### Effect of Temperature on Long Term Float Life

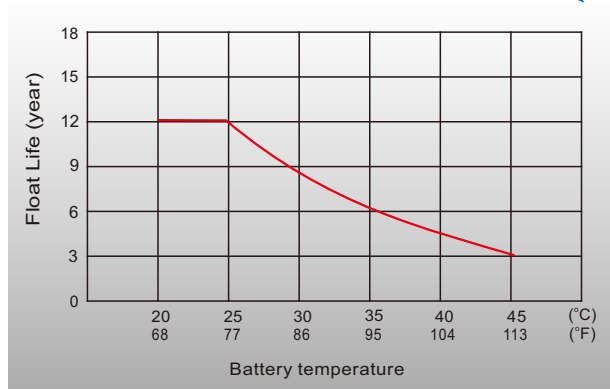

### Sales Offices Worldwide

#### China Sales Office

5th Floor, Xinbaohui Bldg., Nanhai Blvd.,  
Nanshan, Shenzhen, China. 518052  
Tel: +86-755-86036060 (100 lines)  
Fax: +86-755-26067269  
E-mail: export@leoch.com

#### HongKong Sales Office

Workshop C, 33/F, TML Tower, No. 3 Hoi Shing Road,  
Tsuen Wan, New Territories, Hong Kong  
Tel: +852 35786666  
Fax: +44 1452 690125  
E-mail: sales.hk@leoch.com

#### Singapore Sales Office

No. 1 Tech Park Crescent,  
Singapore 638131  
Tel: +65 68636078  
Fax: +65 6863 6079  
Email: sales.sg@Leoch.com

#### Australia Sales Office

2 /29 Tarlington Place, Smithfield. NSW 2164  
Australia  
Tel: 02 9756 0950  
E-mail: sales.au@leoch.com

#### North America Sales Office

19751 Descartes  
Foothill Ranch, CA 92610, USA  
Tel: 949-588-5853  
Fax: 949-588-5966  
E-mail: sales@leoch.us  
Http://www.leoch.us

#### UK Sales Office

9B Wheatstone Court. Waterwells, Business Park,  
Gloucester, GL2-2AQ, UK United Kingdom  
Tel: +44(0) 1452 729428 / 1452 729696  
Fax: +44 1452 690125  
E-mail: Sales.Europe@leoch.com  
Http://www.leoch.eu

#### EMEA Sales Office

1 Deligiorgi St., 121 31 Athens,  
Greece  
Tel: +30 210 5760318 (2 lines)  
E-mail: support\_EMEA@leoch.com  
Http://www.leoch.eu

#### India Sales Office

Shed no.A-53(b), 2nd Stage of Peenya Industrial Area,  
Bangalore North Taluk, Bangalore-560058, India  
Tel: +91-80-23440018/23440019  
Fax: +91-80-23440017  
E-mail: indiasales@leoch.com



[Http://www.leoch.com](http://www.leoch.com)

© 2020 LEOCH. All rights reserved.

Trademarks and logos are the property of LEOCH and its affiliates unless otherwise noted.  
Subject to revisions without prior notice.

Publication No.: LB-LPF12-70-PD-EN-V2.0-202004