

## PLH100(12V100AH)

### PLH SERIES-LONG STANDBY LIFE

#### Applications


- All purpose
- Telecommunication
- Uninterruptable Power Supply (UPS)
- Electric Power System (EPS)
- Emergency backup powersupply
- Emergency light
- Railway signal
- Aircraft signal
- Alarm and security system
- Electronic apparatus and equipment
- Communication power supply
- DC power supply
- Auto control system
- Network Communication



#### Key Features


- Design life up to 20 years
- High-rate performance
- Low internal resistance
- Low self-discharging rate
- High energy density
- Fast charging acceptance
- Heat sealed plastic container
- Flame retardant to UL94-V0
- Up to 2 years shelf life @25°C (77°F)

#### Layout

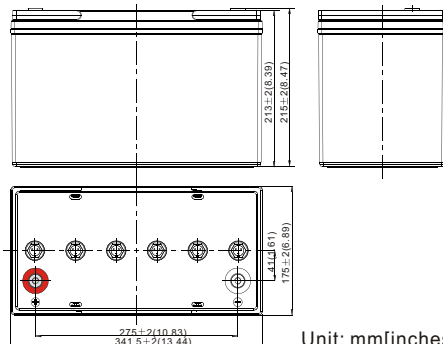

#### Terminal

#### Terminal Model: T11



## PLH100(12V100AH) PLH SERIES-LONG STANDBY LIFE

### Specification

Nominal Voltage	12V		
Rated Capacity (Ah)	10hr	100Ah @25 °C to 1.80V/cell	
	8hr	96Ah @25 °C to 1.75V/cell	
Dimension	Length	341.5±3mm (13.44 inches)	
	Width	175±2mm ( 6.89 inches)	
	Container Height	213±2mm (8.39 inches)	
	Total Height (with Terminal)	215±2mm (8.46 inches)	
Approx Weight	Approx 32.5Kg (71.7lbs)		
Terminal	T11		
Container Material	ABS		
Max. Discharge Current	1250A (5s)		
Internal Resistance	Approx 3.5mΩ		
Operating Temp. Range	Discharge	:-40~65°C (-40~149°F)	
	Charge	: 0~40°C (32~104°F)	
	Storage	:-20~40°C (-4~104°F)	
Capacity affected by Temperature	40°C (104°F)	103%	
	25°C (77°F)	100%	
	0°C (32°F)	86%	
Self Discharge	PLH series batteries can be stored up to 24 months at 25°C(77°F) and then a freshening charge is required. For higher temperatures the time interval will be shorter.		



### Constant Current Discharge (Amperes) at 25 °C (77°F)

F.V/Time	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	8h	10h	20h
1.85V/cell	194.1	160.4	137.7	106.8	79.3	61.7	34.3	24.5	19.7	16.6	11.5	9.80	5.19
1.80V/cell	216.6	176.2	147.6	111.9	82.2	64.0	35.4	25.4	20.3	17.0	11.8	10.0	5.30
1.75V/cell	229.7	184.3	153.9	115.5	84.5	65.7	36.2	25.9	20.8	17.4	12.0	10.1	5.38
1.70V/cell	241.9	192.0	158.6	118.9	86.3	67.0	36.9	26.4	21.1	17.7	12.1	10.3	5.42
1.67V/cell	262.2	204.1	166.2	122.0	87.6	68.0	37.5	26.9	21.4	18.0	12.3	10.4	5.46
1.60V/cell	276.5	212.8	172.4	125.4	89.3	69.2	38.3	27.3	21.8	18.3	12.5	10.5	5.51

### Constant Power Discharge (Watts/cell) at 25 °C (77°F)

F.V/Time	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	8h	10h	20h
1.85V/cell	368.3	306.8	265.0	207.9	156.7	122.3	68.5	49.1	39.6	33.5	23.4	19.9	10.6
1.80V/cell	404.4	332.6	281.2	216.4	161.6	126.1	70.3	50.7	40.7	34.2	23.8	20.3	10.8
1.75V/cell	424.5	344.6	290.8	221.6	164.8	128.8	71.6	51.5	41.5	34.9	24.2	20.5	10.9
1.70V/cell	440.2	354.7	296.8	226.2	167.3	130.6	72.6	52.3	42.0	35.4	24.4	20.7	11.0
1.67V/cell	472.5	373.2	308.4	231.1	169.2	132.1	73.6	53.0	42.5	35.9	24.7	20.9	11.1
1.60V/cell	484.9	381.0	314.7	234.6	170.6	133.2	74.4	53.5	42.9	36.2	24.9	21.0	11.2

Specifications subject to change without notice.

#### China sales office:

Add: 5th Floor, Xinbaohui Bldg., Nanhai Blvd.,  
Nanshan, Shenzhen, China. 518052  
Tel: +86-755-86036060 (100 lines)  
Fax: +86-755-26067269  
E-mail: export@leoch.com  
Http://www.leoch.com

#### HongKong sales office:

Add: Workshop C, 33/F, TML Tower,  
No. 3 Hoi Shing Road, Tsuen Wan,  
New Territories, Hong Kong  
Tel: +852 35786666  
Fax: +852 21170016  
E-mail: sales.hk@leoch.com

#### Singapore sales office:

Add: No. 1 Tech Park Crescent,  
Singapore 638131  
Tel: +65 68416629  
Fax: +65 68443210  
Email: sales.sg@leoch.com

#### North America sales office:

Add: 19751 Descartes, Unit A,  
Foothill Ranch, CA 92610, USA  
Tel: 949-588-5853  
Fax: 949-588-5966  
E-mail: sales@leoch.us  
Http://www.leoch.com

#### Europe sales office:

Add: 9B Wheatstone Court, Waterwells  
Business Park, Gloucester, GL2-2AQ,  
UK United Kingdom  
Tel: +44(0) 1452 729428 / 1452 729696  
Fax: +44 (0)1452-690125  
E-mail: Sales.Europe@leoch.com