


LPG SERIES-GEL BATTERY

LPG12-24 (12V24Ah)

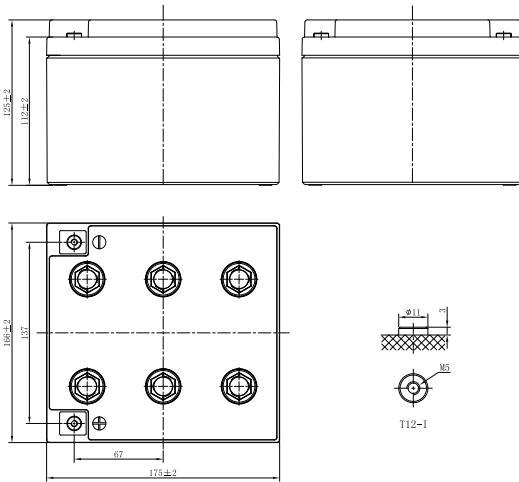

CHARACTERISTICS

Item	Specifications	
Rated Voltage	12V	
Nominal Capacity (25°C)	C ₂₀ , 1.80V/cell	24Ah
Dimension	Length	166mm (6.54inches)
	Width	175mm (6.89inches)
	Container Height	125mm (4.92inches)
	Total Height	125mm (4.92inches)
Approx Weight	8.5kg (18.7lbs)	
Terminal	T12-I(M5)	
Container Material	ABS (UL94 HB or V-0 optional)	
Short-circuit current	600A	
Internal Resistance (25°C)	Approx 20 mΩ (Fully charged)	
Operating Temp. Range	Discharge	-20~60°C (-4~140°F)
	Charge	-20~40°C (-4~104°F)
	Storage	-20~50°C (-4~122°F)
Nominal Operating Temp. Range	25±3°C (77±5°F)	
Max.Charging Current (25°C)	0.25C	
Charge voltage (25°C)	Standby Use	Cycle Use
	2.23-2.27V/cell	2.35-2.40V/cell
Temp. Coefficient	-3mV/cell/°C	
	40°C (104°F)	103%
Effect of temp. to Capacity	25°C (77°F)	100%
	0°C (32°F)	86%
	≤2.5% per month at 25°C (77°F). LPG series batteries may be stored up to 9 months at 25°C (77°F) and then a freshening charge is required. For higher temperatures the time interval will be shorter.	
Self Discharge		

DISCHARGE TABLE

Constant Current Discharge (Amperes) at 25°C (77°F)												
F.V/Time	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	20.3	15.9	12.2	10.2	6.46	4.92	4.07	3.52	3.04	2.42	2.10	1.15
1.80V/cell	23.3	17.8	13.4	11.2	6.98	5.27	4.32	3.70	3.19	2.54	2.19	1.20
1.75V/cell	26.1	19.6	14.5	12.0	7.40	5.57	4.52	3.84	3.30	2.62	2.23	1.22
1.70V/cell	28.2	21.0	15.4	12.7	7.85	5.80	4.67	3.96	3.42	2.70	2.28	1.24
1.67V/cell	29.3	21.8	15.9	13.2	8.05	5.98	4.79	4.04	3.47	2.74	2.31	1.25
1.60V/cell	31.8	23.3	17.1	14.0	8.38	6.22	4.97	4.17	3.56	2.79	2.36	1.27
Constant Power Discharge (Watts/cell) at 25°C (77°F)												
F.V/Time	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	38.9	30.7	23.6	19.8	12.6	9.64	8.00	6.95	6.01	4.82	4.18	2.30
1.80V/cell	43.9	34.0	25.8	21.8	13.6	10.3	8.50	7.27	6.29	5.04	4.36	2.39
1.75V/cell	48.8	37.0	27.7	23.2	14.4	10.8	8.80	7.53	6.50	5.19	4.44	2.44
1.70V/cell	52.0	39.3	29.2	24.4	15.1	11.3	9.10	7.74	6.71	5.34	4.54	2.47
1.67V/cell	53.5	40.4	30.0	25.1	15.5	11.6	9.30	7.88	6.80	5.41	4.58	2.49
1.60V/cell	57.4	42.9	32.0	26.6	16.0	12.0	9.60	8.10	6.94	5.49	4.67	2.52

LPG SERIES-GEL BATTERY

LPG12-24 (12V24Ah)



APPLICATIONS

- Telecommunications
- Solar system
- Wind power system
- Engine starting
- Wheelchair, Floor cleaning machines, Golf trolley, Boats


GENERAL FEATURES

- 6 years design life (25°C)
- Gelled electrolyte for superior thermal management, long float life
- Efficient gas recombination decreases gassing/water and extends battery life
- Robust design - resilient in harsh conditions
- Proof against deep discharge - greater long-term energy delivery and cycle life


STANDARDS

- IEC60896 Certified
- Classified as "General Purpose" according to Eurobat
- UL, CE Approved
- Manufactured in Leoch@IATF16949, ISO 45001, ISO 9001 and ISO 14001 certified production facilities


Discharge Characteristics

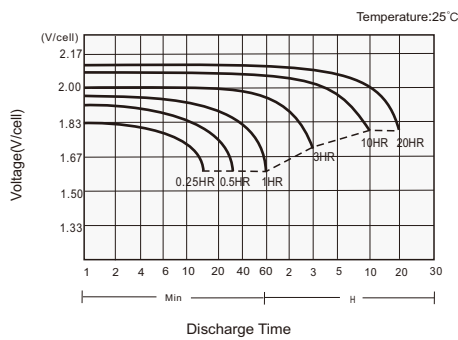

Charging Characteristics

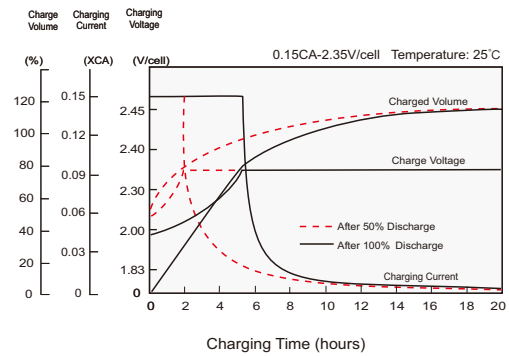

Cycle Life in Relation to DoD

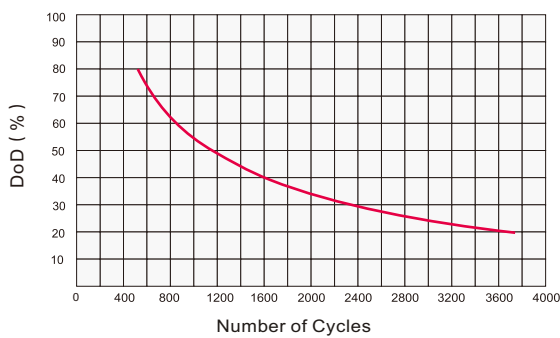

Self Discharge Characteristics

