

MARINE AGM DUAL PURPOSE BATTERY

24M-550 (12V79Ah)



CHARACTERISTICS



Item	Specifications
Nominal Voltage	12V
Nominal Capacity (20HR)	79Ah
Reserve Capacity	150min
Cold Cranking Amps@0°F (-18°C)	550A
Dimension	Length
	260mm (10.2inches)
	Width
Height	168mm (6.61inches)
	233mm (9.17inches)
Approx Weight	23.0kg (50.7lbs)
Terminal	12
Cell layout	1
Hold-Down	B0
Case	Black-ABS Material
Cover	Black-ABS Material
Handle	TS7

APPLICATIONS

- MARINE and RV
- Start and deep cycle

GENERAL FEATURES

- Superior starting and cycling performance
- High capacity and high CCA
- 2x faster charge acceptance than conventional starter batteries
- 3x higher cycle life than conventional starter batteries
- Advanced Absorbed Glass Mat (AGM) technology

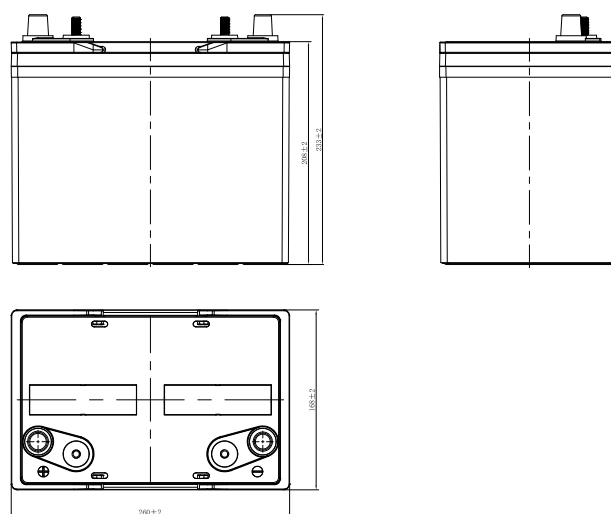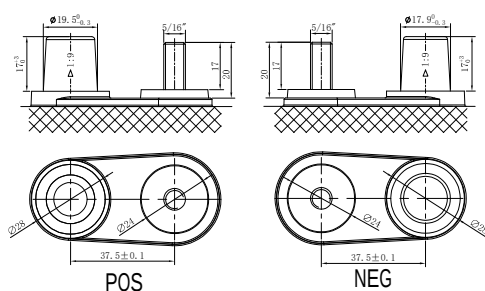

*Values are subject to variation of +/- 5% in normal manufacturing processes.

Leoch International Technology Ltd.
www.leoch.com

Leoch Batteries Pte Ltd
www.leoch.sg

Leoch Battery Corporation
www.leochamericas.com

Leoch Europe S.A.
www.leoch.eu