

# MARINE AGM DUAL PURPOSE BATTERY

27M-580 (12V92Ah)



## CHARACTERISTICS



| Item                           | Specifications     |
|--------------------------------|--------------------|
| Nominal Voltage                | 12V                |
| Nominal Capacity (20HR)        | 92Ah               |
| Reserve Capacity               | 175min             |
| Cold Cranking Amps@0°F (-18°C) | 580A               |
| Dimension                      | Length             |
|                                | 306mm (12.0inches) |
|                                | Width              |
| Height                         | 168mm (6.6inches)  |
|                                | 233mm (9.17inches) |
| Approx Weight                  | 27.0kg (59.5lbs)   |
| Terminal                       | 12                 |
| Cell layout                    | 1                  |
| Hold-Down                      | B0                 |
| Case                           | Black-ABS Material |
| Cover                          | Black-ABS Material |
| Handle                         | TS7                |

## APPLICATIONS

- MARINE and RV
- Start and deep cycle

## GENERAL FEATURES

- Superior starting and cycling performance
- High capacity and high CCA
- 2x faster charge acceptance than conventional starter batteries
- 3x higher cycle life than conventional starter batteries
- Advanced Absorbed Glass Mat (AGM) technology

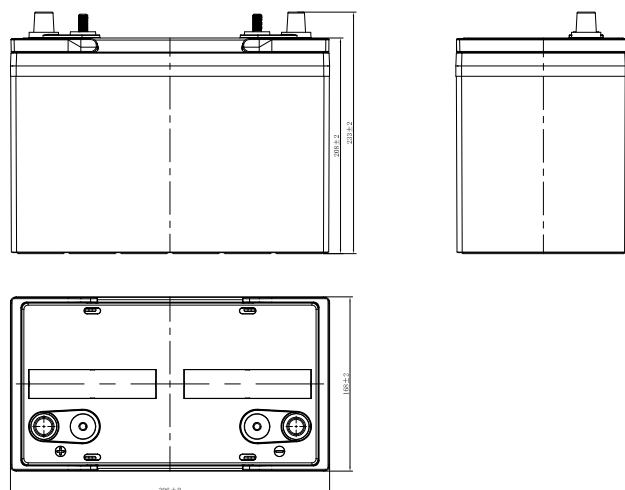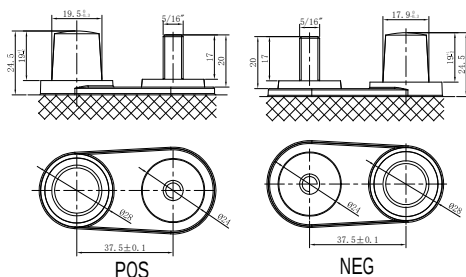

\*Values are subject to variation of +/- 5% in normal manufacturing processes.

Leoch International Technology Ltd.  
www.leoch.com

Leoch Batteries Pte Ltd  
www.leoch.sg

Leoch Battery Corporation  
www.leochamericas.com

Leoch Europe S.A.  
www.leoch.eu