

AGM START-STOP BATTERY

AGM-L1 (12V50Ah)



CHARACTERISTICS



| Item | Specifications |
|--------------------------------|--------------------|
| Nominal Voltage | 12V |
| Nominal Capacity (20HR) | 50Ah |
| Reserve Capacity | 80min |
| Cold Cranking Amps@0°F (-18°C) | 570A |
| Dimension | Length |
| | 207mm (8.15inches) |
| | Width |
| Dimension | 175mm (6.89inches) |
| | Height |
| Dimension | 190mm (7.48inches) |
| | Approx Weight |
| Dimension | 15.5kg (34.2lbs) |
| | Terminal |
| Dimension | 1 |
| | Cell layout |
| Dimension | 0 |
| | Hold-Down |
| Dimension | B13 |
| | Case |
| Dimension | Black-PP Material |
| | Cover |
| Dimension | Black-PP Material |
| | Handle |
| Dimension | TS2 |

APPLICATIONS

- Car with start-stop system
- EV/HEV
- Engine start

GENERAL FEATURES

- Maximum CCA and life
- Valve regulated technology
- Advanced Absorbed Glass Mat (AGM) technology
- Top-level safety - absolutely no free acid
- 2x Faster Charge Acceptance than conventional starter batteries
- 3x higher cycle life than conventional starter batteries
- Suit for working in partial state of charge operations (PSoC)
- OE quality certification

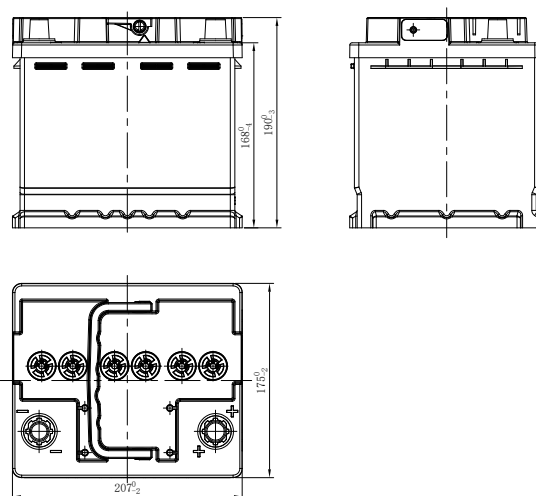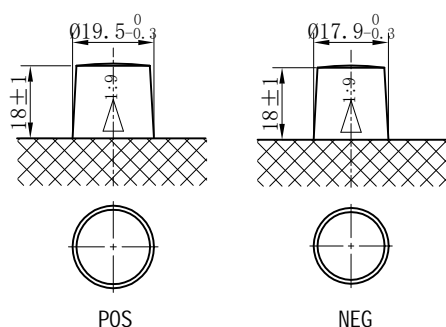

*Values are subject to variation of +/- 5% in normal manufacturing processes.

Leoch International Technology Ltd.
www.leoch.com

Leoch Batteries Pte Ltd
www.leoch.sg

Leoch Battery Corporation
www.leochamericas.com

Leoch Europe S.A.
www.leoch.eu