

# AUXILIARY BATTERY

EB12D-4 (12V12Ah)



## CHARACTERISTICS



| Item                           | Specifications    |                    |
|--------------------------------|-------------------|--------------------|
| Nominal Voltage                | 12V               |                    |
| Nominal Capacity (20HR)        | 12Ah              |                    |
| Cold Cranking Amps@0°F (-18°C) | 180A              |                    |
| Dimension                      | Length            | 150mm (5.91inches) |
|                                | Width             | 87mm (3.43inches)  |
|                                | Height            | 130mm (5.12inches) |
| Approx Weight                  | 4.25kg (9.37lbs)  |                    |
| Terminal                       | O                 |                    |
| Cell layout                    | 1                 |                    |
| Hold-Down                      | B0                |                    |
| Case                           | Black-PP Material |                    |
| Cover                          | Black-PP Material |                    |
| Handle                         |                   |                    |

## APPLICATIONS

- High-end car auxiliary
- Safety assistant

## GENERAL FEATURES

- VRLA technology with long life
- Modified PP material case and cover, with high strength and impact resistance
- Top-level safety - absolutely no free acid
- Absorb the instantaneous overvoltage in the vehicle circuit, protect the vehicle circuit from damage
- Uninterruptible power supply for safety components and escort for safety during driving
- OE quality certification

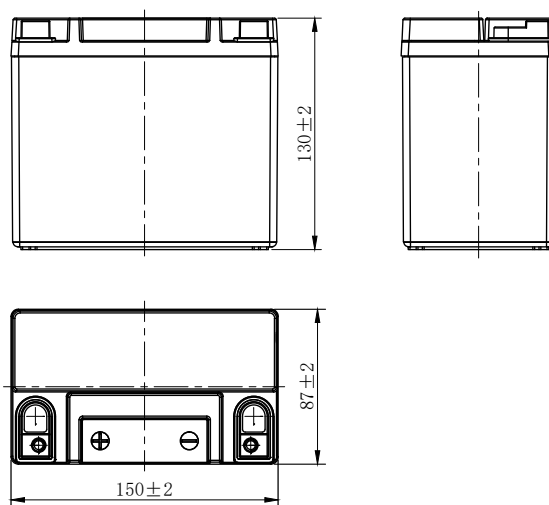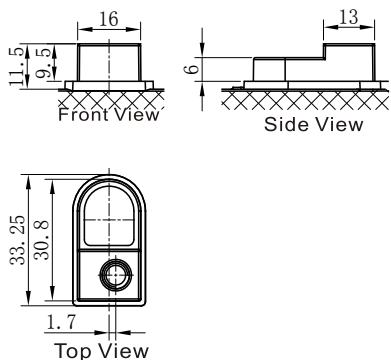

\*Values are subject to variation of +/- 5% in normal manufacturing processes.

Leoch International Technology Ltd.  
www.leoch.com

Leoch Batteries Pte Ltd  
www.leoch.sg

Leoch Battery Corporation  
www.leochamericas.com

Leoch Europe S.A.  
www.leoch.eu