

FLOODED BATTERY

31A-630 (12V80Ah)



CHARACTERISTICS



| Item | Specifications |
|--------------------------------|-----------------------------|
| Nominal Voltage | 12V |
| Nominal Capacity (20HR) | 80Ah |
| Reserve Capacity | 138min |
| Cold Cranking Amps@0°F (-18°C) | 630A |
| Dimension | Length 329mm (13.0inches) |
| | Width 171mm (6.73inches) |
| | Height 235.5mm (9.27inches) |
| Approx Weight | 21.8kg (48.1lbs) |
| Terminal | 5 |
| Cell layout | 1 |
| Hold-Down | B0 |
| Case | Black-PP Material |
| Cover | Black-PP Material |
| Handle | TS9 |

APPLICATIONS

- Car start
- EV/HEV
- Engine start

GENERAL FEATURES

- High capacity and high CCA
- Long life
- Advanced lead-calcium alloy technology, maintenance-free design
- Patented venting system bring less water loss and prevent acid leakage
- OE quality certification

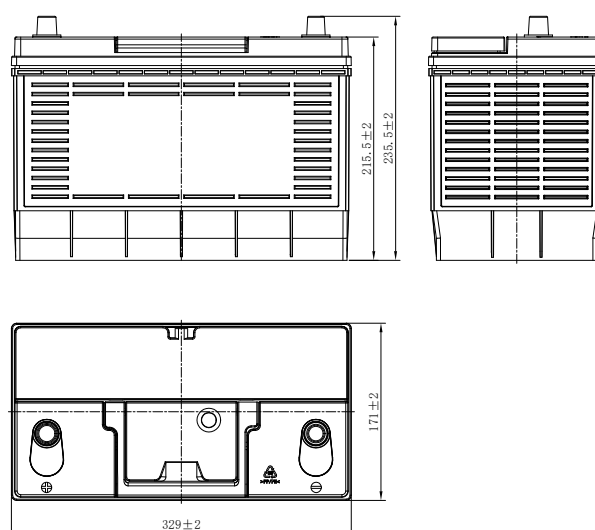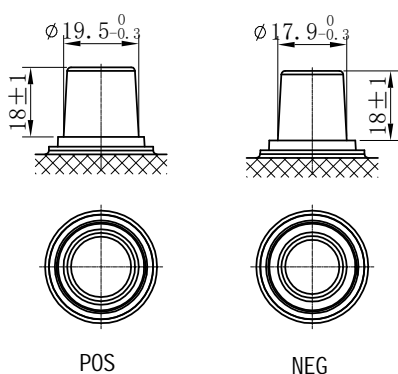

*Values are subject to variation of +/- 5% in normal manufacturing processes.

Leoch International Technology Ltd.
www.leoch.com

Leoch Batteries Pte Ltd
www.leoch.sg

Leoch Battery Corporation
www.leochamericas.com

Leoch Europe S.A.
www.leoch.eu