

FLOODED BATTERY

55025 (12V49Ah)



CHARACTERISTICS



| Item | Specifications |
|--------------------------------|--------------------|
| Nominal Voltage | 12V |
| Nominal Capacity (20HR) | 49Ah |
| Reserve Capacity | 77min |
| Cold Cranking Amps@0°F (-18°C) | 450A |
| Dimension | Length |
| | 207mm (8.15inches) |
| | Width |
| Height | 175mm (6.89inches) |
| | 190mm (7.48inches) |
| Approx Weight | 12.8kg (28.2lbs) |
| Terminal | 1 |
| Cell layout | 0 |
| Hold-Down | B13 |
| Case | Black-PP Material |
| Cover | Black-PP Material |
| Handle | TS2 |

APPLICATIONS

- Car start
- EV/HEV
- Engine start

GENERAL FEATURES

- High capacity and high CCA
- Long life
- Advanced lead-calcium alloy technology, maintenance-free design
- Patented venting system bring less water loss and prevent acid leakage
- OE quality certification

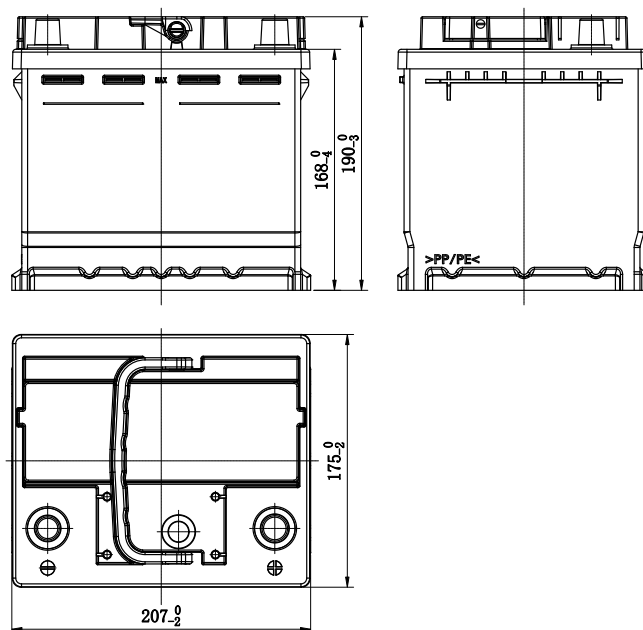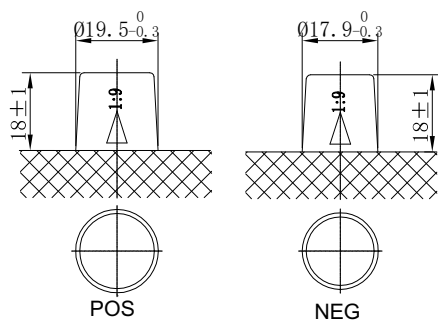

*Values are subject to variation of +/- 5% in normal manufacturing processes.

Leoch International Technology Ltd.
www.leoch.com

Leoch Batteries Pte Ltd
www.leoch.sg

Leoch Battery Corporation
www.leochamericas.com

Leoch Europe S.A.
www.leoch.eu