

FLOODED HIGH TEMPERATURE BATTERY

105D31LHT (12V90Ah)



CHARACTERISTICS



| Item | Specifications |
|--------------------------------|--------------------|
| Nominal Voltage | 12V |
| Nominal Capacity (20HR) | 90Ah |
| Reserve Capacity | 158min |
| Cold Cranking Amps@0°F (-18°C) | 600A |
| Dimension | Length |
| | 303mm (11.9inches) |
| | Width |
| Dimension | 170mm (6.69inches) |
| | Height |
| Dimension | 222mm (8.74inches) |
| | Approx Weight |
| Terminal | 21.1kg (46.5lbs) |
| | 1 |
| Cell layout | 0 |
| Hold-Down | B1 |
| Case | Black-PP Material |
| Cover | Black-PP Material |
| Handle | TS1 |

APPLICATIONS

- Car start
- EV/HEV
- Engine start

GENERAL FEATURES

- Design for high temperature countries and regions
- Superior life in high temperature environment
- High tin alloy and thicker positive grid
- High-temp paste
- Patented venting system bring less water loss and prevent acid leakage

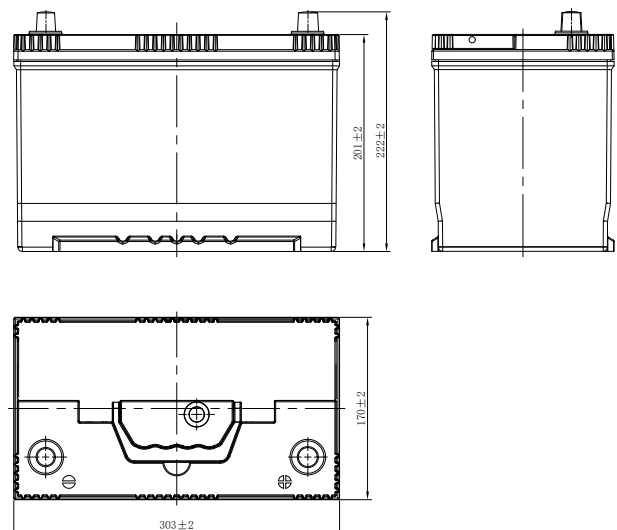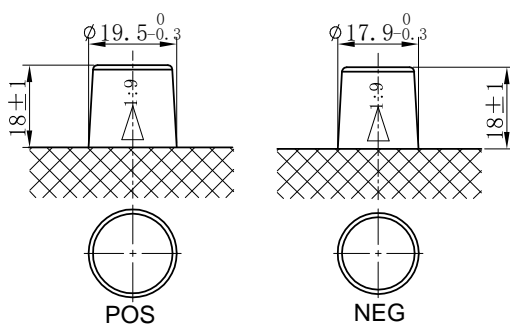

*Values are subject to variation of +/- 5% in normal manufacturing processes.

Leoch International Technology Ltd.
www.leoch.com

Leoch Batteries Pte Ltd
www.leoch.sg

Leoch Battery Corporation
www.leochamericas.com

Leoch Europe S.A.
www.leoch.eu