

FLOODED HIGH TEMPERATURE BATTERY

110D31RHT (12V95Ah)



CHARACTERISTICS



Item	Specifications
Nominal Voltage	12V
Nominal Capacity (20HR)	95Ah
Reserve Capacity	169min
Cold Cranking Amps@0°F (-18°C)	640A
Dimension	Length 303mm (11.9inches)
	Width 170mm (6.69inches)
	Height 222mm (8.74inches)
Approx Weight	21.8kg (48.1lbs)
Terminal	1
Cell layout	1
Hold-Down	B1
Case	Black-PP Material
Cover	Black-PP Material
Handle	TS1

APPLICATIONS

- Car start
- EV/HEV
- Engine start

GENERAL FEATURES

- Design for high temperature countries and regions
- Superior life in high temperature environment
- High tin alloy and thicker positive grid
- High-temp paste
- Patented venting system bring less water loss and prevent acid leakage

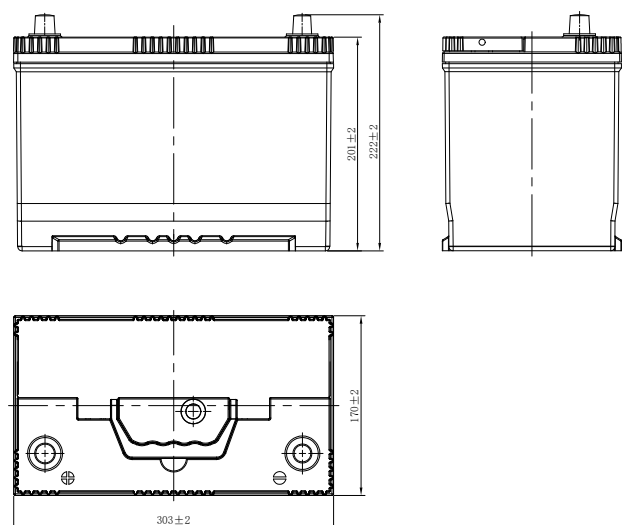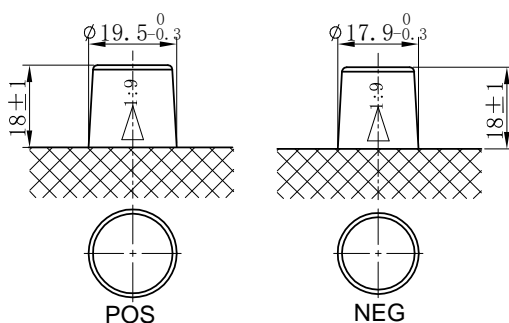

*Values are subject to variation of +/- 5% in normal manufacturing processes.

Leoch International Technology Ltd.
www.leoch.com

Leoch Batteries Pte Ltd
www.leoch.sg

Leoch Battery Corporation
www.leochamericas.com

Leoch Europe S.A.
www.leoch.eu