

FLOODED HIGH TEMPERATURE BATTERY

170G51RHT (12V170Ah)



CHARACTERISTICS



Item	Specifications
Nominal Voltage	12V
Nominal Capacity (20HR)	170Ah
Reserve Capacity	336min
Cold Cranking Amps@0°F (-18°C)	1000A
Dimension	Length 510mm(20.1inches)
	Width 221mm(8.70inches)
	Height 222maxmm(8.74inches)
Approx Weight	41.8kg(92.2lbs)
Terminal	1
Cell layout	3
Hold-Down	B0
Case	Black-PP Material
Cover	Black-PP Material
Handle	TS8

APPLICATIONS

- Car start
- EV/HEV
- Engine start

GENERAL FEATURES

- Design for high temperature countries and regions
- Superior life in high temperature environment
- High tin alloy and thicker positive grid
- High-temp paste
- Patented venting system bring less water loss and prevent acid leakage

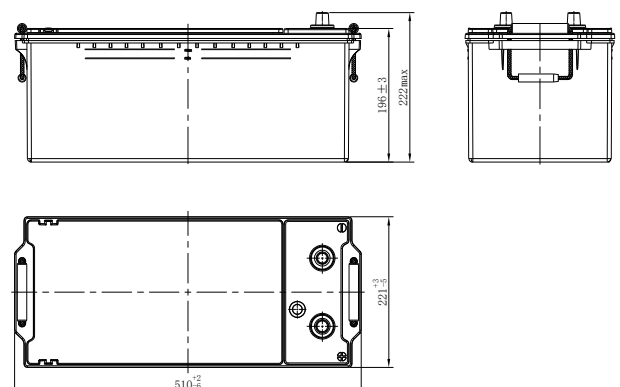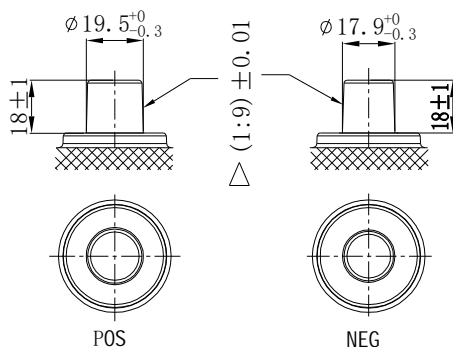

*Values are subject to variation of +/- 5% in normal manufacturing processes.

Leoch International Technology Ltd.

www.leoch.com

Leoch Batteries Pte Ltd

www.leoch.sg

Leoch Battery Corporation

www.leochamericas.com

Leoch Europe S.A.

www.leoch.eu

Data above is recommended and the picture is only for battery effect display, Leoch reserve the final right of explanation.
© LEOCH. All rights reserved. Trademarks and logos are the property of LEOCH and its affiliates unless otherwise noted. Subject to revisions without prior notice. E&OE.

Publication No.: LB-170G51RHT-PD-EN-V1.0-20250220