

FLOODED HIGH TEMPERATURE BATTERY

65D26LHT (12V65Ah)



CHARACTERISTICS



Item	Specifications
Nominal Voltage	12V
Nominal Capacity (20HR)	65Ah
Reserve Capacity	108min
Cold Cranking Amps@0°F (-18°C)	480A
Dimension	Length
	260mm (10.2inches)
	Width
Dimension	172mm (6.77inches)
	Height
Dimension	221mm (8.70inches)
	Approx Weight
Dimension	17.2kg (37.9lbs)
	Terminal
Dimension	1
	Cell layout
Dimension	0
	Hold-Down
Dimension	B01
	Case
Dimension	Black-PP Material
	Cover
Dimension	Black-PP Material
	Handle
Dimension	TS1

APPLICATIONS

- Car start
- EV/HEV
- Engine start

GENERAL FEATURES

- Design for high temperature countries and regions
- Superior life in high temperature environment
- High tin alloy and thicker positive grid
- High-temp paste
- Patented venting system bring less water loss and prevent acid leakage

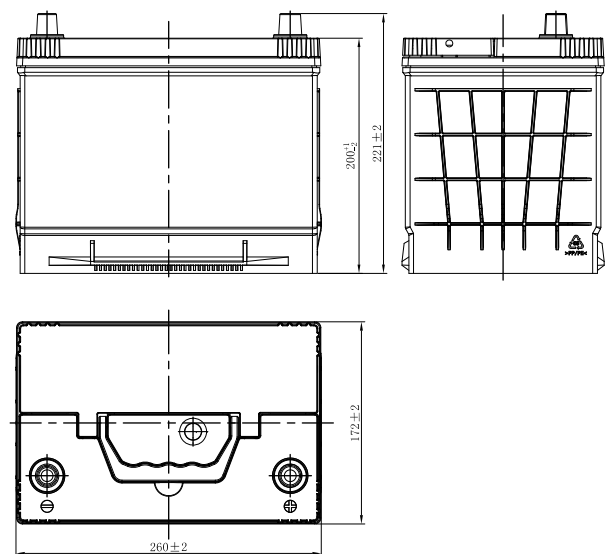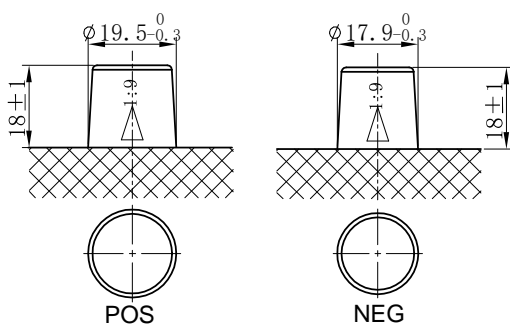

*Values are subject to variation of +/- 5% in normal manufacturing processes.

Leoch International Technology Ltd.
www.leoch.com

Leoch Batteries Pte Ltd
www.leoch.sg

Leoch Battery Corporation
www.leochamericas.com

Leoch Europe S.A.
www.leoch.eu