

# FLOODED HIGH TEMPERATURE BATTERY

## 75D23LHT (12V63Ah)



### CHARACTERISTICS



Item	Specifications	
Nominal Voltage	12V	
Nominal Capacity (20HR)	63Ah	
Reserve Capacity	104min	
Cold Cranking Amps@0°F (-18°C)	490A	
Dimension	Length	231.5mm (9.11inches)
	Width	172mm (6.77inches)
	Container Height	202mm (7.95inches)
	Total Height (with Terminal)	223mm (8.78inches)
Approx Weight	15.9kg (35.1lbs)	
Terminal	1	
Cell layout	0	
Hold-Down	B0	
Case	Black-PP Material	
Cover	Black-PP Material	
Handle	TS1	

### APPLICATIONS

- Car start
- EV/HEV
- Engine start

### GENERAL FEATURES

- Design for high temperature countries and regions
- Superior life in high temperature environment
- High tin alloy and thicker positive grid
- High-temp paste
- Patented venting system bring less water loss and prevent acid leakage

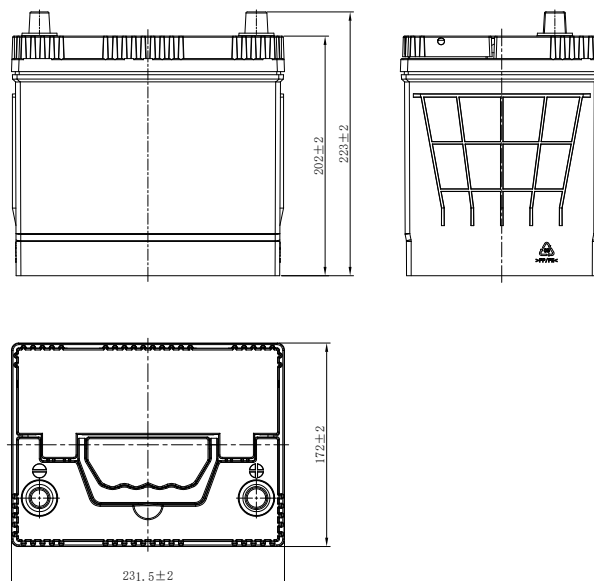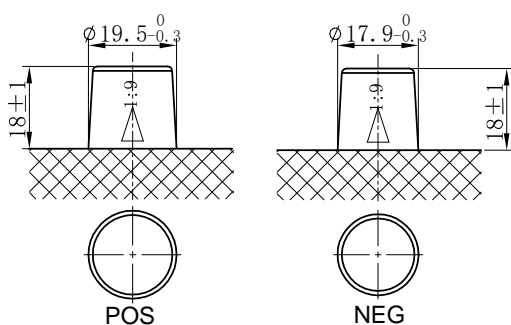

\*Values are subject to variation of +/- 5% in normal manufacturing processes.

Leoch International Technology Ltd.  
www.leoch.com

Leoch Batteries Pte Ltd  
www.leoch.sg

Leoch Battery Corporation  
www.leochamericas.com

Leoch Europe S.A.  
www.leoch.eu