

HEAVY DUTY FLOODED BATTERY

135F51R (12V130Ah)



CHARACTERISTICS



Item	Specifications
Nominal Voltage	12V
Nominal Capacity (20HR)	130Ah
Reserve Capacity	245min
Cold Cranking Amps@0°F (-18°C)	880A
Dimension	Length
	504mm(19.8inches)
	Width
Height	183.5mm(7.22inches)
	223mm(8.78inches)
Approx Weight	34.1kg(75.2lbs)
Terminal	1
Cell layout	3
Hold-Down	B0
Case	Black-PP Material
Cover	Black-PP Material
Handle	TS8

APPLICATIONS

- Commercial vehicle start
- Engine start

GENERAL FEATURES

- High capacity and high CCA
- Maintenance-free
- High vibration resistance
- Strong lead-calcium alloy grids for great corrosion resistance
- High strength PP case and cover no need be worried about breakage
- OE quality certification

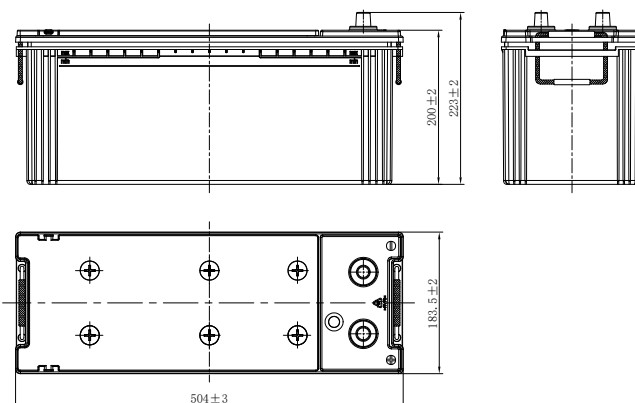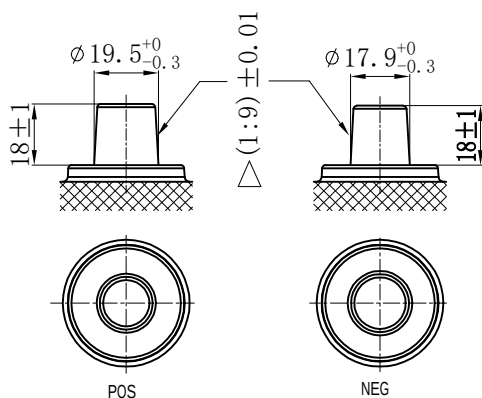

*Values are subject to variation of +/- 5% in normal manufacturing processes.

Leoch International Technology Ltd.
www.leoch.com

Leoch Batteries Pte Ltd
www.leoch.sg

Leoch Battery Corporation
www.leochamericas.com

Leoch Europe S.A.
www.leoch.eu

Data above is recommended and the picture is only for battery effect display, Leoch reserve the final right of explanation.
© LEOCH. All rights reserved. Trademarks and logos are the property of LEOCH and its affiliates unless otherwise noted. Subject to revisions without prior notice. E&OE.

Publication No.: LB-135F51R-PD-EN-V1.0-20250220