

HEAVY DUTY FLOODED BATTERY

225H52L (12V225Ah)



CHARACTERISTICS



Item	Specifications
Nominal Voltage	12V
Nominal Capacity (20HR)	225Ah
Reserve Capacity	468min
Cold Cranking Amps@0°F (-18°C)	1280A
Dimension	Length 521mm (20.5inches)
	Width 261mm (10.3inches)
	Height 240.5mm (9.47inches)
Approx Weight	57.5kg (126.8lbs)
Terminal	1
Cell layout	4
Hold-Down	B0
Case	Black-PP Material
Cover	Black-PP Material
Handle	TS8

APPLICATIONS

- Commercial vehicle start
- Engine start

GENERAL FEATURES

- High capacity and high CCA
- Maintenance-free
- High vibration resistance
- Strong lead-calcium alloy grids for great corrosion resistance
- High strength PP case and cover no need be worried about breakage
- OE quality certification

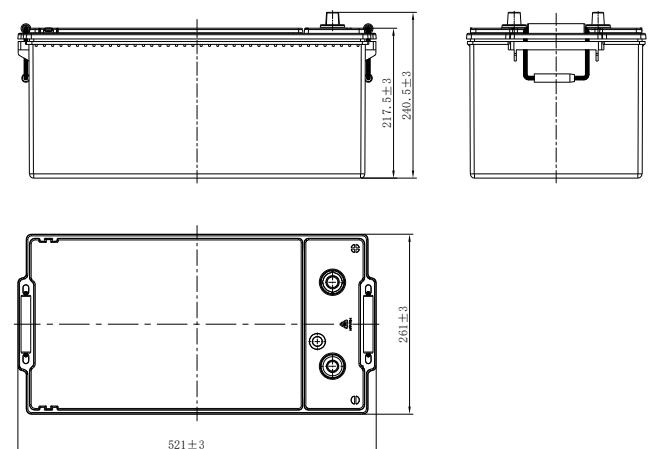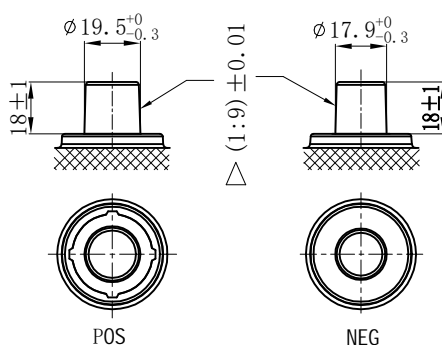

*Values are subject to variation of +/- 5% in normal manufacturing processes.

Leoch International Technology Ltd.
www.leoch.com

Leoch Batteries Pte Ltd
www.leoch.sg

Leoch Battery Corporation
www.leochamericas.com

Leoch Europe S.A.
www.leoch.eu