

# FLOODED BATTERY

80D26R (12V70Ah)



## CHARACTERISTICS



| Item                           | Specifications             |
|--------------------------------|----------------------------|
| Nominal Voltage                | 12V                        |
| Nominal Capacity (20HR)        | 70Ah                       |
| Reserve Capacity               | 118min                     |
| Cold Cranking Amps@0°F (-18°C) | 600A                       |
| Dimension                      | Length 259mm (10.2inches)  |
|                                | Width 174.8mm (6.88inches) |
|                                | Height 221mm (8.70inches)  |
| Approx Weight                  | 17.7kg (39.0lbs)           |
| Terminal                       | 1                          |
| Cell layout                    | 1                          |
| Hold-Down                      | B1                         |
| Case                           | Black-PP Material          |
| Cover                          | Black-PP Material          |
| Handle                         | TS1                        |

## APPLICATIONS

- Car start
- EV/HEV
- Engine start

## GENERAL FEATURES

- High capacity and high CCA
- Long life
- Advanced lead-calcium alloy technology, maintenance-free design
- Patented venting system bring less water loss and prevent acid leakage
- OE quality certification

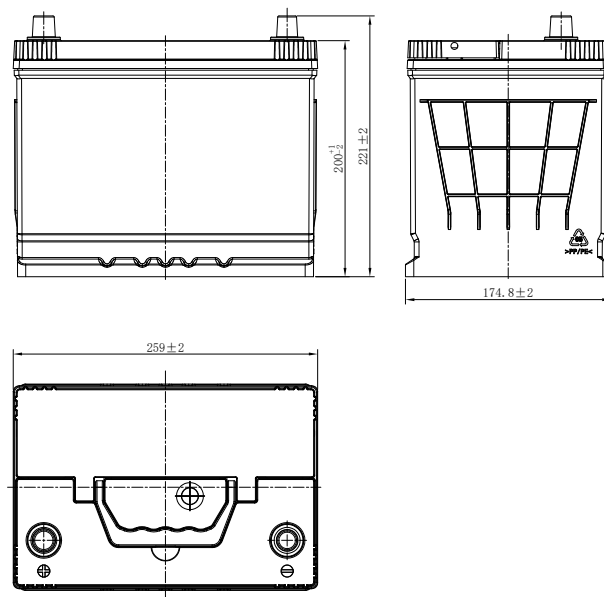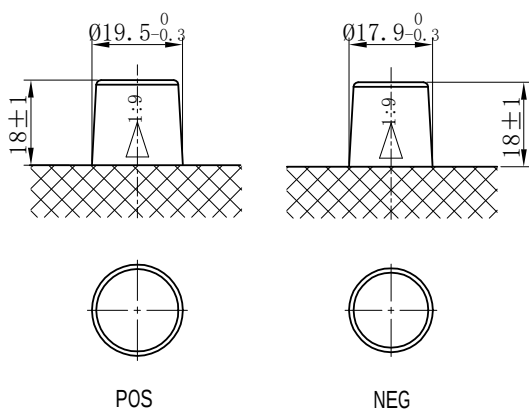

\*Values are subject to variation of +/- 5% in normal manufacturing processes.

Leoch International Technology Ltd.  
www.leoch.com

Leoch Batteries Pte Ltd  
www.leoch.sg

Leoch Battery Corporation  
www.leochamericas.com

Leoch Europe S.A.  
www.leoch.eu