


6-QWS-170(1000)-R (12V170Ah)



Dimensions (mm)

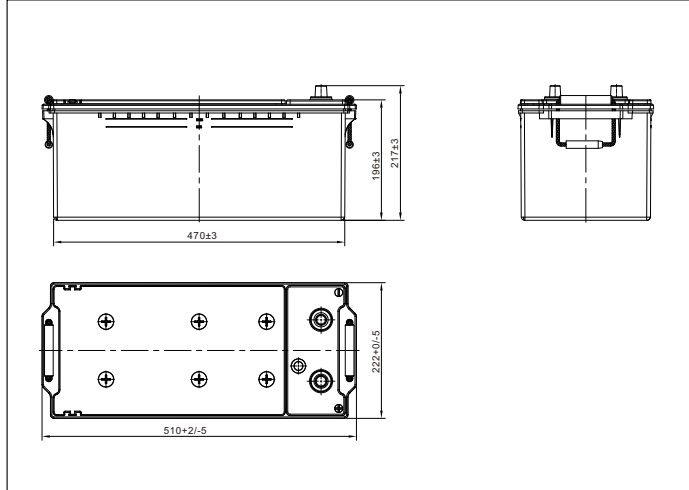


Physical Specification (mm)

| | | |
|------------------------|-----------------------------|-------------------------------------|
| Nominal Voltage | | 12V |
| Nominal Capacity(20HR) | | 170Ah |
| Dimension | Length | 510 +2/-5mm(20.08inches) |
| | Width | 222 +0/-5mm(8.74inches) |
| | Container Height | 196±3mm(7.72inches) |
| | Total Height(with Terminal) | 217±3mm(8.54inches) |
| Weight | | Approx 41.8Kg(92.17lbs) |
| Acid | | 1.280±0.015g/cm ³ (25°C) |
| Standard Terminal | | 1 |
| Cell layout | | 3 |
| Hold-Down | | B0 |
| Cell plate qty | | / |
| Case | | Black-PP Material |
| Cover | | Black-PP Material |
| Handle | | Black-PP Material |
| QTY/PLT/layer | | / |


Electrical Specification

| | | |
|---|--------------------|--------|
| Rated Capacity | 20 hour rate(8.5A) | 170Ah |
| Reserve Capacity | | 336min |
| Cold Cranking Performance Amps@0°F(-18°C) | | 1000A |


Discharge Characteristics(25°C,70°F)

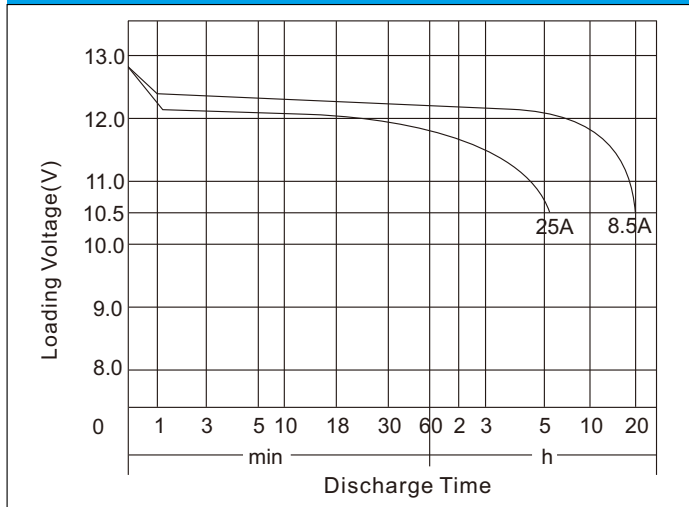

Standard Terminal (mm) Cell Layout

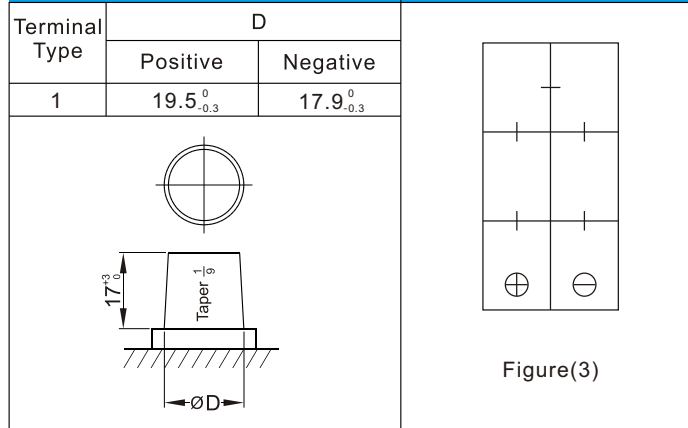

Discharge Characteristics(-18°C,0°F)

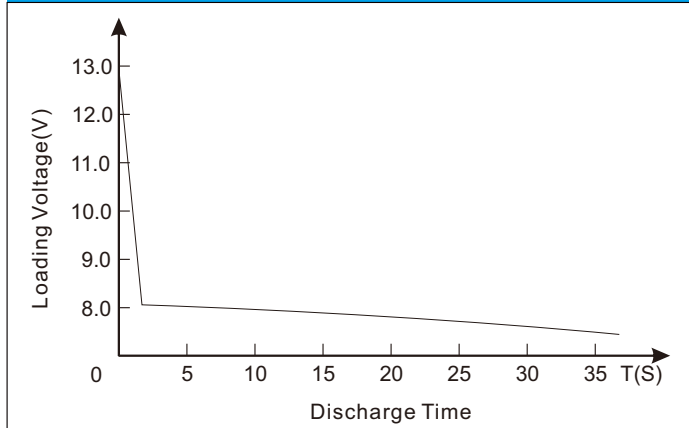

*Values are subject to variation of +/- 5% in normal manufacturing processes.
 *Technical specifications and the product line above could be changed without prior notice.