




LEOCH BATTERY

JIS 80D26L (12V70Ah)



Dimensions (mm)

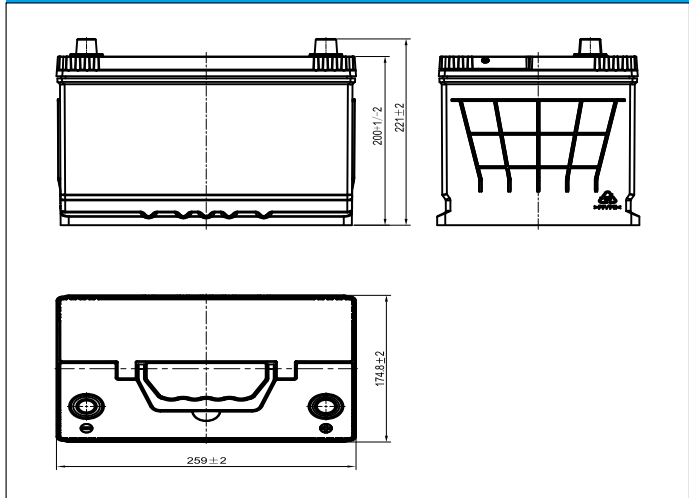


Physical Specification (mm)

| | | |
|------------------------|-------------------------------------|------------------------|
| Nominal Voltage | 12V | |
| Nominal Capacity(20HR) | 70Ah | |
| Dimension | Length | 259±2mm(10.20inches) |
| | Width | 174.8±2mm(6.88inches) |
| | Container Height | 200+1/-2mm(7.87inches) |
| | Total Height(with Terminal) | 221±2mm(8.70inches) |
| Weight | Approx17.7Kg(39.03lbs) | |
| Acid | 1.280±0.015g/cm ³ (25°C) | |
| Standard Terminal | 1 | |
| Cell layout | 0 | |
| Hold-Down | B1 | |
| Cell plate qty | / | |
| Case | Black-PP Material | |
| Cover | Black-PP Material | |
| Handle | Black-PP Material | |
| QTY/PLT/layer | / | |

Electrical Specification

| | | |
|---|--------------------|------|
| Rated Capacity | 20 hour rate(3.5A) | 70Ah |
| Reserve Capacity | 118min | |
| Cold Cranking Performance Amps@0°F(-18°C) | 600A | |

Discharge Characteristics(25°C,70°F)

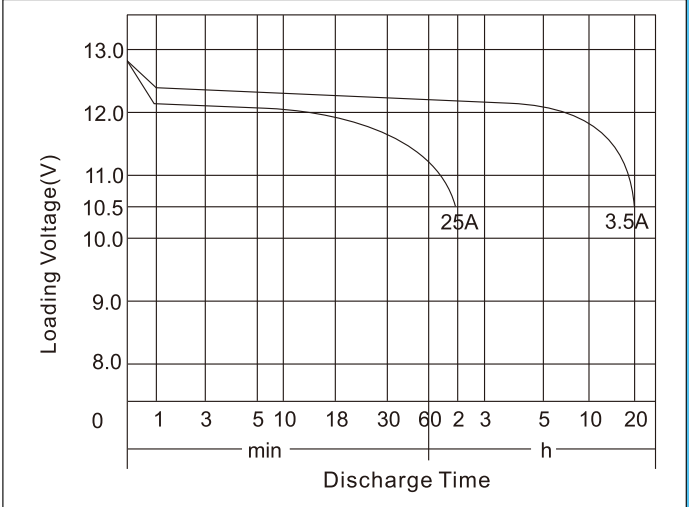


Standard Terminal (mm) Cell Layout

| Terminal Type | D | |
|---------------|-----------------------------------|-----------------------------------|
| | Positive | Negative |
| 1 | 19.5 ⁰ _{-0.3} | 17.9 ⁰ _{-0.3} |

Figure(0)

Discharge Characteristics(-18°C,0°F)

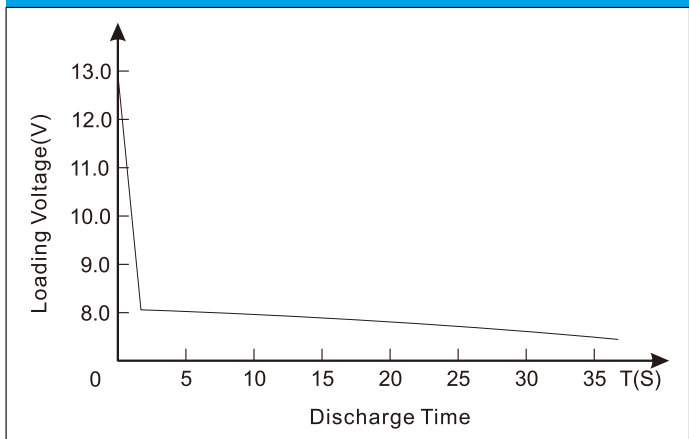

*Values are subject to variation of +/- 5% in normal manufacturing processes.
 *Technical specifications and the product line above could be changed without prior notice.