


Physical Specification

Nominal Voltage		12.8V
Nominal Capacity		2.0Ah
Dimension	Length	92 ± 2mm (4.45 inches)
	Width	52 ± 2mm (2.76 inches)
	Container Height	92 ± 2mm (3.35 inches)
	Total Height (with Terminal)	92 ± 2mm (3.35 inches)
Weight	Approx 0.48kg (1.06lbs)	

- * Motorcycle Li-ion battery
- * Powerful 140 cranking amps
- * Shipped pre-charged and ready to install
- * Built in BMS to monitor the battery status in real time and protect the battery
- * Replaces LB3L-B/LB3L-A/LB4L-B/LB4L-A/LT4AL-BS/LT5AL-BS/LB5L-B/12N5-3B/LT5A-3-1 Battery

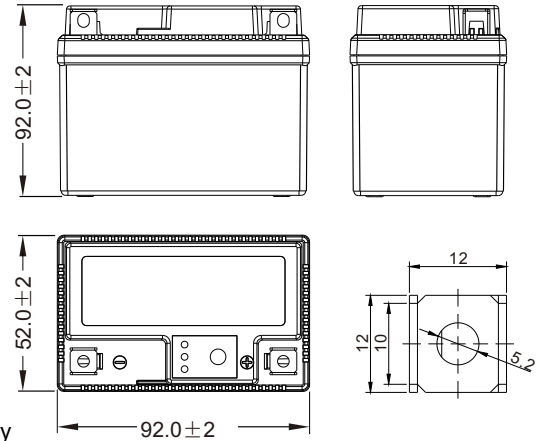



Dimensions (mm)

Electrical Specification

Rated Capacity	0.1C rate (0.2A)	2.0Ah
	0.5C rate (1.0A)	2.0Ah
	10C rate (20.0A)	1.8Ah
	70C rate (140.0A)	Peak Current
Capacity affected by Temperature	40 °C (104 °F)	98%
	25 °C (77 °F)	100%
	0 °C (32 °F)	85%
	-20 °C (-4 °F)	60%
Self Discharge	Approximately 1.5% per month (25 °C (77 °F))	
Charging Methods	Constant-Voltage Charge:	
	Full Charge	Initial charging current: less than 1.0A Voltage: 14.40 V ~ 14.60 V at 25 °C (77 °F)



Curve Specification

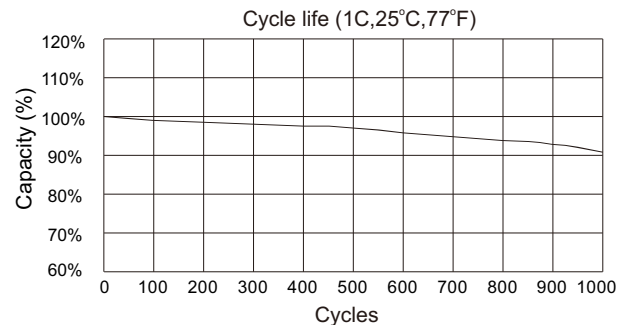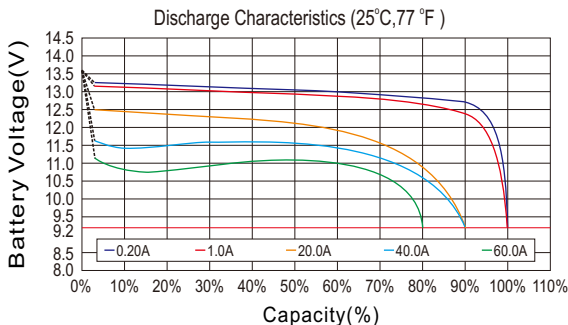

Publication No :LB-LFPS-X1-PD-EN-V1.3-202112

