
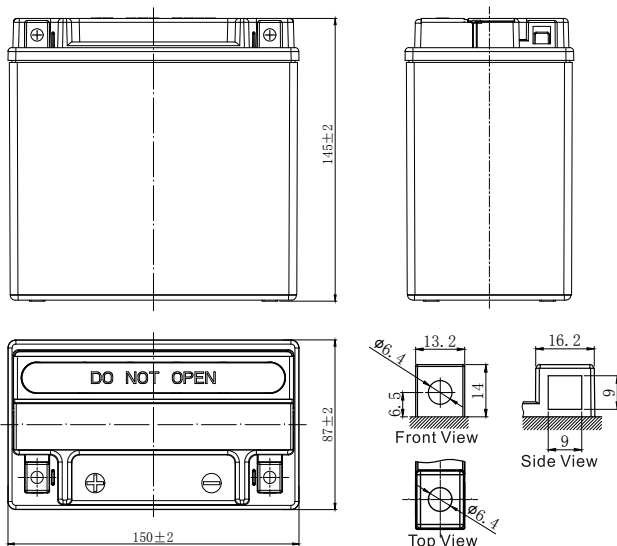


MAINTENANCE-FREE MOTORCYCLE BATTERY

EBX14-BS (12V12Ah)



GENERAL FEATURES

- Sealed AGM battery
- Rest after filling acid
- Fresh Pack, Maintenance-Free

*Values are subject to variation of +/- 5% in normal manufacturing processes.

Leoch International Technology Ltd.
www.leoch.com

Leoch Batteries Pte Ltd
www.leoch.sg

Leoch Battery Corporation
www.leochamericas.com

Leoch Europe S.A.
www.leoch.eu

Data above is recommended and the picture is only for battery effect display, Leoch reserve the final right of explanation.
© LEOCH. All rights reserved. Trademarks and logos are the property of LEOCH and its affiliates unless otherwise noted. Subject to revisions without prior notice. E&OE.

CHARACTERISTICS

Item	Specifications
Nominal Voltage	12V
Nominal Capacity (10HR)	12Ah
Cold Cranking Performance Amps@0°F (-18°C)	200A
Dimension (±2mm)	Length 150mm (5.91inches)
	Width 87mm (3.43inches)
	Container Height 145mm (5.71inches)
	Total Height 145mm (5.71inches)
Battery (with acid)	Approx Weight 4.37kg (9.63lbs)
Electrolyte	Approx Weight 0.86kg (1.90lbs)
Terminal type	A
Battery type	Dry Charged Series
Full Charge	Constant-Voltage Charge:
	Initial charging current Less than 0.3C ₁₀
	Voltage 14.40V~15.00V at 25°C (77°F)
	Charging time 15~18h
	Constant-Current Charge:
Floating Charge	Charging current 0.1C ₁₀ , when charging voltage up to 14.40V, continue to charge 4h
	Initial charging current Unlimited
	Voltage 13.50V~13.80V at 25°C (77°F)
Capacity affected by Temperature	40°C (104°F) 106%
	25°C (77°F) 100%
	0°C (32°F) 86%
	-15°C (5°F) 65%

Discharge Characteristics (25°C, 77°F)

