


# CONVENTIONAL FLOODED MOTORCYCLE BATTERY

LB16-B (12V19Ah)

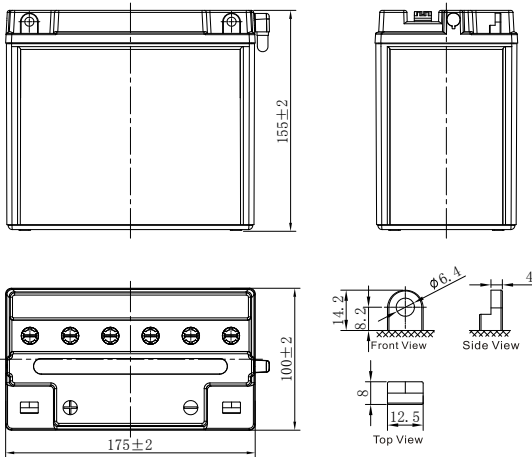

## GENERAL FEATURES


- Low maintenance
- High performance and dry charged high quality and flooded battery
- Shipped without battery electrolyte pre-charged and ready to install

\*Values are subject to variation of +/- 5% in normal manufacturing processes.

## CHARACTERISTICS

Item	Specifications	
Nominal Voltage	12V	
Nominal Capacity (10HR)	19Ah	
Cold Cranking Performance Amps@0°F (-18°C)	220A	
Dimension (±2mm)	Length	175mm (6.89inches)
	Width	100mm (3.94inches)
	Container Height	155mm (6.10inches)
	Total Height	155mm (6.10inches)
Battery (with acid)	Approx Weight	6.06kg (13.4lbs)
Electrolyte	Approx Weight	1.63kg (3.59lbs)
Terminal type	B	
Battery type	Conventional Flooded (High Performance) Series	
Constant-Voltage Charge:		
Full Charge	Initial charging current	Less than 0.3C <sub>10</sub>
	Voltage	14.40V~15.00V at 25°C (77°F)
	Charging time	16~24h
	Constant-Current Charge:	
Floating Charge	Charging current 0.1C <sub>10</sub> , when charging voltage up to 15.60V, continue to charge 2h	
	Initial charging current	Unlimited
	Voltage	13.50V~13.80V at 25°C (77°F)
	Capacity affected by Temperature	40°C (104°F)
25°C (77°F)		100%
0°C (32°F)		86%
-15°C (5°F)		65%

## Discharge Characteristics (25°C, 77°F)

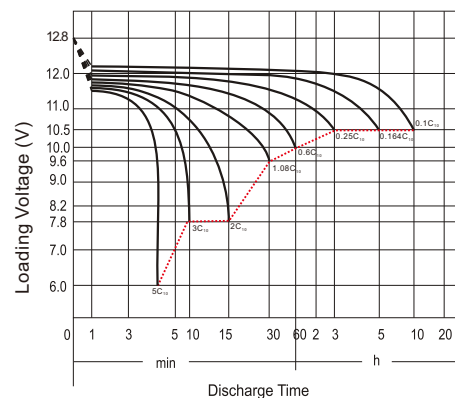

Leoch International Technology Ltd.  
www.leoch.com

Leoch Batteries Pte Ltd  
www.leoch.sg

Leoch Battery Corporation  
www.leochamericas.com

Leoch Europe S.A.  
www.leoch.eu