
MAINTENANCE-FREE MOTORCYCLE BATTERY

LT7E-4 (12V7Ah)








CHARACTERISTICS

IR)	Specifications 12V
IR)	12V
IR)	
,	7Ah
ance Amps@0°F (-18	90A
Length	135mm (5.31inches)
Width	75mm (2.95inches)
Container Height	122mm (4.80inches)
Total Height	122mm (4.80inches)
Approx Weight	2.75kg (6.06lbs)
	В
Factory Activated Ser	ies
Constant-Voltage Cha	arge:
Initial charging curren	t Less than 0.3C ₁₀
Voltage	14.40V~15.00V at 25°C (77°F)
Charging time	15~18h
Constant-Current Cha	arge:
Charging current 0.10 14.40V, continue to cl	C ₁₀ , when charging voltage up to harge 4h
Initial charging curren	t Unlimited
Voltage	13.50V~13.80V at 25°C (77°F)
40°C (104°F)	106%
25°C (77°F)	100%
0°C (32°F)	86%
-15°C (5°F)	65%
	Length Width Container Height Total Height Approx Weight Factory Activated Ser Constant-Voltage Changing currer Voltage Charging time Constant-Current Charging current 0.10 14.40V, continue to c Initial charging currer Voltage 40°C (104°F) 25°C (77°F) 0°C (32°F)

GENERAL FEATURES

- Maintenance-free
- · Sealed and non-spillable AGM battery
- · Shipped pre-charged and ready to install

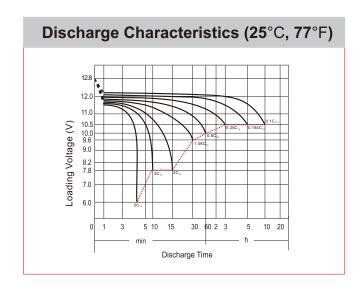

Leoch International Technology Ltd.

Leoch Batteries Pte Ltd www.leoch.sg

Leoch Battery Corporation

Leoch Europe S.A. www.leoch.eu



mww.leochamericas.com

^{*}Values are subject to variation of +/- 5% in normal manufacturing processes.