



LPCG SERIES-CYCLE APPLICATION

LPCG12-100 (12V100Ah)



CHARACTERISTICS

Item		Specifications
Voltage		12V
Dimension	Length	330mm (13.0inches)
	Width	173mm (6.81inches)
	Container Height	212mm (8.35inches)
	Total Height	218mm (8.58inches)
Approx Weight		31.2kg (68.8lbs)
Terminal		T11(M8)
Container Material		ABS
Short-circuit current		2070A
Internal Resistance (25°C)		≤ 6.9 mΩ
Self Discharge		≤3% per month at 25°C (77°F)
Capacity	20HR	100Ah
	10HR	90Ah
	5HR	80Ah
Operating Temp. Range	Discharge	-20~55°C (-4~131°F)
	Charge	0~40°C (32~104°F)
	Storage	-20~50°C (-4~122°F)

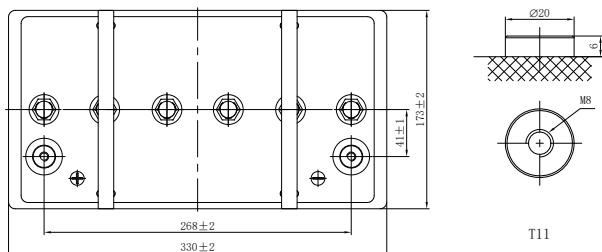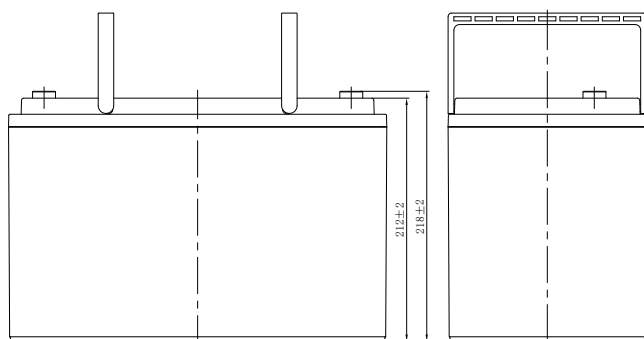

APPLICATIONS

- Electrically powered wheelchair
- Vehicle in place of walking
- Lawn-mower
- Golf trolleys and golf cart
- Railway and marine systems

STANDARDS

- IEC 60896 Certified
- Classified as "Long Life" according to Eurobat
- UL Certified
- Manufactured in Leoch® IATF16949, ISO 9001, ISO 14001 and ISO 45001 certified production facilities

LPCG SERIES-CYCLE APPLICATION


LPCG12-100 (12V100Ah)




GENERAL FEATURES

- Special plate design, long cycle life
- ≥ 600 Cycles @ 80%DOD
- Operation temperature $-20 \sim 55^{\circ}\text{C}$
- Gelled electrolyte for superior thermal management
- Good deep discharge resilience performance


Discharge Characteristics

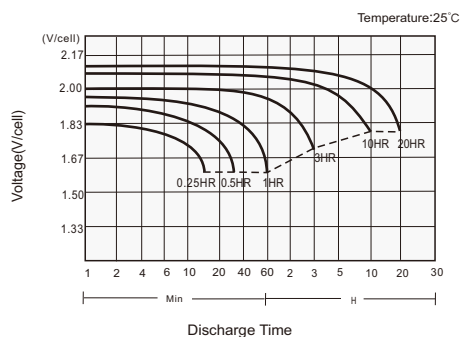


Charging Characteristics

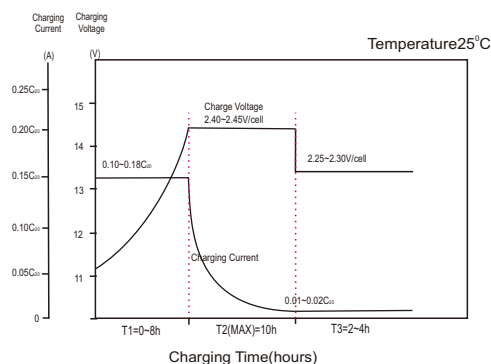

Cycle Life in Relation to Depth of Discharge

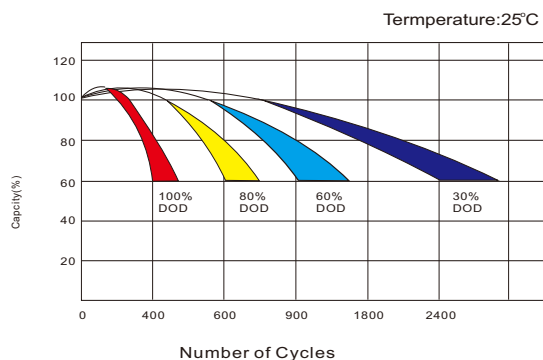

Temperature Effects in Relation to Capacity

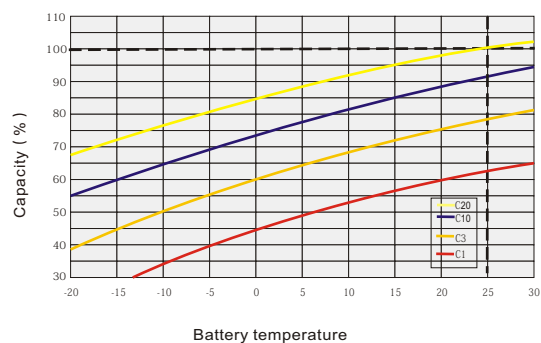

Leoch International Technology Ltd.
www.leoch.com

Leoch Batteries Pte Ltd
www.leoch.sg

Leoch Battery Corporation
www.leochamericas.com

Leoch Europe S.A.
www.leoch.eu