


# LPL SERIES-LONG LIFE STANDBY

## LPL2-200 (2V200Ah)

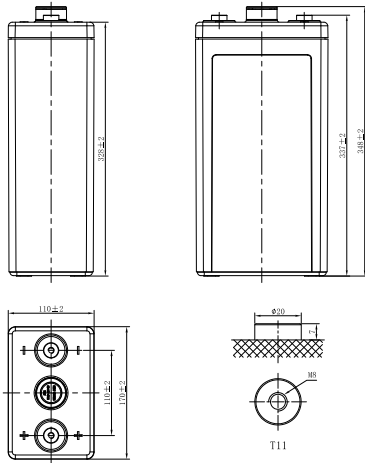

### CHARACTERISTICS

Item	Specifications	
Rated Voltage	2V	
Nominal Capacity (25°C)	C <sub>10</sub> : 1.80V/cell	200Ah
Dimension	Length	170mm (6.69inches)
	Width	110mm (4.33inches)
	Container Height	328mm (12.9inches)
	Total Height	348mm (13.7inches)
Approx Weight	13.4kg (29.5lbs)	
Terminal	T11(M8)	
Container Material	ABS (UL94 HB or V-0 optional)	
Short-circuit current	3000A	
Internal Resistance (25°C)	Approx 0.9 mΩ (Fully charged)	
Operating Temp. Range	Discharge	-15~50°C (5~122°F)
	Charge	-20~40°C (-4~104°F)
	Storage	-15~40°C (5~104°F)
Nominal Operating Temp. Range	25±3°C (77±5°F)	
Max.Charging Current (25°C)	0.3C	
Charge voltage (25°C)	Float Charge	Equalization Charge
	2.25-2.30V/cell	2.35-2.40V/cell
Temp. Coefficient	-3mV/cell/°C	-5mV/cell/°C
	40°C (104°F)	103%
Effect of temp. to Capacity	25°C (77°F)	100%
	0°C (32°F)	86%
	≤3% per month at 25°C (77°F). LPL series batteries may be stored up to 6 months at 25°C (77°F) and then a freshening charge is required. For higher temperatures the time interval will be shorter.	
Self Discharge		

### DISCHARGE TABLE

Constant Current Discharge (Amperes) at 25°C (77°F)												
F.V/Time	30min	45min	1h	1.5h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	126.0	110.1	96.3	76.0	61.5	46.8	37.7	31.8	27.6	22.4	18.7	10.0
1.80V/cell	144.7	123.1	106.6	83.1	66.9	50.6	40.6	34.2	29.6	24.0	20.0	10.6
1.75V/cell	151.4	128.1	110.5	85.9	69.0	52.0	41.6	35.0	30.2	24.4	20.3	10.7
1.70V/cell	161.2	132.9	114.6	88.8	71.2	53.5	42.6	35.8	30.9	24.9	20.6	10.9
1.67V/cell	165.6	135.9	117.0	90.4	72.4	54.3	43.2	36.2	31.2	25.1	20.8	11.0
1.60V/cell	168.7	142.9	122.7	94.4	75.4	56.3	44.7	37.4	32.1	25.7	21.3	11.1
Constant Power Discharge (Watts/cell) at 25°C (77°F)												
F.V/Time	30min	45min	1h	1.5h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	231.3	213.4	187.2	148.1	120.3	91.8	74.0	62.5	54.4	44.3	37.1	20.0
1.80V/cell	263.4	236.9	205.8	161.1	130.2	98.9	79.5	67.2	58.2	47.3	39.5	21.1
1.75V/cell	273.2	244.6	211.9	165.5	133.4	101.1	81.2	68.5	59.2	48.1	40.1	21.3
1.70V/cell	288.2	251.9	218.2	170.1	137.0	103.6	82.9	69.8	60.4	48.8	40.6	21.6
1.67V/cell	293.3	256.3	221.7	172.5	138.8	104.8	83.9	70.6	61.0	49.3	40.9	21.7
1.60V/cell	296.1	266.7	230.3	178.7	143.5	108.1	86.2	72.4	62.4	50.3	41.7	22.1

# LPL SERIES-LONG LIFE STANDBY

## LPL2-200 (2V200Ah)



### APPLICATIONS

- Tele-communication central station (wired or cellular)
- Power system communication, military communication, etc.
- Network communication including: data transmission, television signal transmission, etc.
- Uninterruptable Power System (UPS- for Telecom)
- EPS


### GENERAL FEATURES

- 16 years design life (25°C)
- Lead calcium alloy, sealed design, no watering required
- Puncture resistant micro-porous glass mat separators extend life
- Unique technology optimizes power capacity, cell consistency, and long-term reliability
- Designed for a wide range of applications


### STANDARDS

- Compliance with IEC 60896 standards, EU Battery Directive
- UL, CE Approved
- Manufactured in Leoch@IATF 16949, ISO 45001, ISO 9001 and ISO 14001 certified production facilities


#### Discharge Characteristics

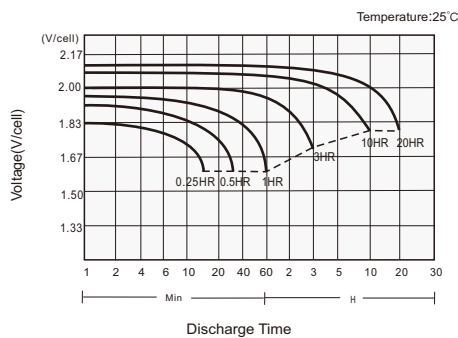

#### Charging Characteristics

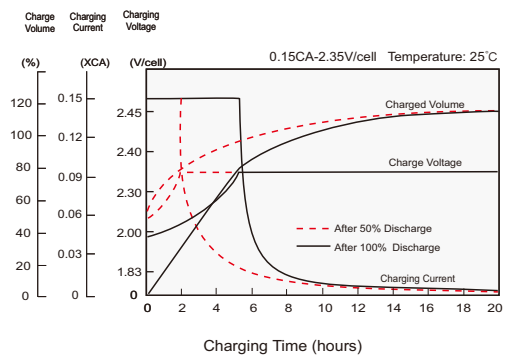

#### Effects of Temperature on Capacity

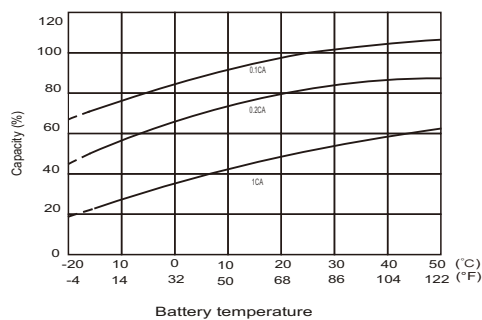

#### Self Discharge Characteristics

