


LHR SERIES-HIGH RATE

LHR1226W(A) (12V26W)

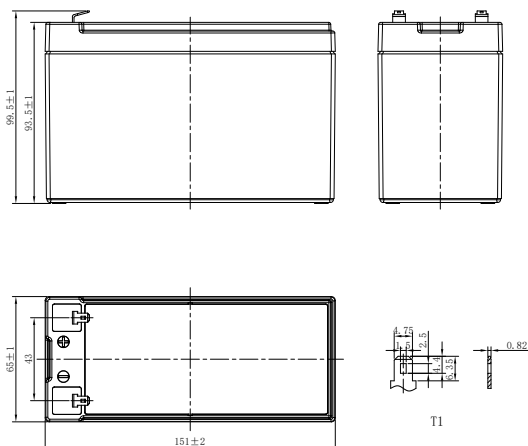

CHARACTERISTICS

Item		Specifications
Rated Voltage		12V
Nominal Rate (25°C)	$W_{15}, 1.67V/cell$	26W/cell
Nominal Capacity (25°C)	$C_{10}, 1.80V/cell$	6.56Ah
Dimension	Length	151mm (5.94inches)
	Width	65mm (2.56inches)
	Container Height	93.5mm (3.68inches)
	Total Height	99.5mm (3.92inches)
Approx Weight		2.17kg (4.78lbs)
Terminal		T1/T2
Container Material		ABS (UL94 HB or V-0 optional)
Short-circuit current		183.7A
Internal Resistance (25°C)		Approx 25 mΩ (Fully charged)
Operating Temp. Range	Discharge	-20~55°C (-4~131°F)
	Charge	-20~40°C (-4~104°F)
	Storage	-15~50°C (5~122°F)
Nominal Operating Temp. Range		25±3°C (77±5°F)
Max.Charging Current (25°C)		0.25C
Charge voltage (25°C)	Float Charge	Equalization Charge
	2.25-2.30V/cell	2.30-2.40V/cell
Temp. Coefficient	-3mV/cell/°C	-4mV/cell/°C
	40°C (104°F)	106%
Effect of temp. to Capacity	25°C (77°F)	100%
	0°C (32°F)	86%
Self Discharge		≤3% per month at 25°C (77°F)

DISCHARGE TABLE

Constant Current Discharge (Amperes) at 25°C (77°F)														
F.V/Time	5min	10min	15min	20min	30min	45min	1h	1.5h	2h	3h	4h	5h	8h	10h
1.85V/cell	21.7	13.9	10.6	8.62	6.34	5.05	4.16	3.05	2.40	1.73	1.38	1.17	0.790	0.647
1.80V/cell	23.4	14.8	11.1	8.96	6.55	5.18	4.26	3.11	2.44	1.76	1.40	1.19	0.800	0.656
1.75V/cell	24.6	15.3	11.5	9.21	6.71	5.29	4.35	3.17	2.48	1.79	1.42	1.20	0.810	0.662
1.70V/cell	25.8	16.0	11.9	9.49	6.89	5.41	4.43	3.22	2.52	1.81	1.44	1.22	0.820	0.669
1.67V/cell	26.7	16.4	12.2	9.68	7.01	5.50	4.50	3.27	2.55	1.83	1.45	1.23	0.830	0.674
1.60V/cell	28.3	17.1	12.6	9.97	7.20	5.64	4.60	3.34	2.60	1.86	1.48	1.25	0.840	0.682

Constant Power Discharge (Watts/cell) at 25°C (77°F)														
F.V/Time	5min	10min	15min	20min	30min	45min	1h	1.5h	2h	3h	4h	5h	8h	10h
1.85V/cell	44.7	28.8	23.1	18.1	13.4	9.79	8.10	5.96	4.69	3.40	2.72	2.32	1.57	1.29
1.80V/cell	47.6	30.3	24.1	18.7	13.7	10.0	8.27	6.06	4.77	3.45	2.75	2.35	1.59	1.30
1.75V/cell	49.6	31.3	24.8	19.1	14.0	10.2	8.41	6.15	4.84	3.49	2.78	2.37	1.61	1.31
1.70V/cell	51.5	32.4	25.5	19.6	14.3	10.4	8.53	6.24	4.90	3.54	2.82	2.40	1.62	1.33
1.67V/cell	52.8	33.1	26.0	19.9	14.5	10.5	8.65	6.31	4.94	3.57	2.84	2.42	1.63	1.34
1.60V/cell	54.9	34.0	26.7	20.4	14.8	10.7	8.80	6.42	5.03	3.62	2.88	2.45	1.65	1.35

LHR SERIES-HIGH RATE

LHR1226W(A) (12V26W)



APPLICATIONS

- UPS
- Hospitals and Testing Laboratories
- Emergency Power Supply
- Industrial Process Control Facilities
- Banks and Financial Markets
- Data and Network Operation Centers


GENERAL FEATURES

- 6 years design life (25°C)
- Excellent high current performance - optimised for short discharge time
- Advanced AGM technology for superior high-rate power
- Long Life Alloy - minimizing grid growth, reducing gassing, and extending battery life
- Epoxy-sealed posts eliminate leaks
- Optimal energy density - saves floor space


STANDARDS

- Compliance with IEC 60896 standards
- Classified as "General Purpose" according to Eurobat
- CE,UL Approved
- Manufactured in Leoch@IATF 16949, ISO 45001,ISO 9001 and ISO 14001 certified production facilities


Discharge Characteristics

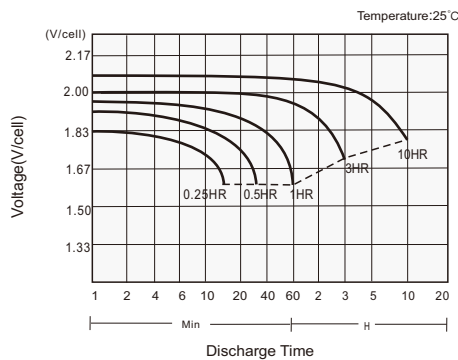

Charging Characteristics

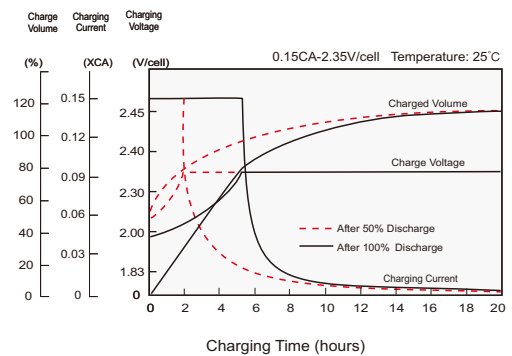

Effects of Temperature on Capacity

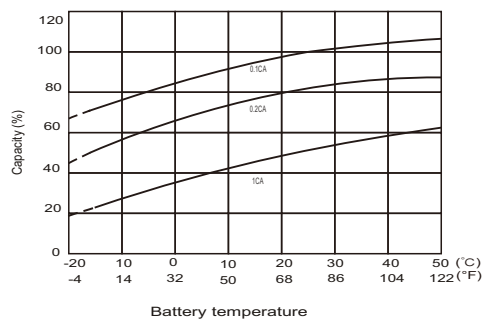

Self Discharge Characteristics

