


LHR SERIES-HIGH RATE

LHR12460W (12V460W)

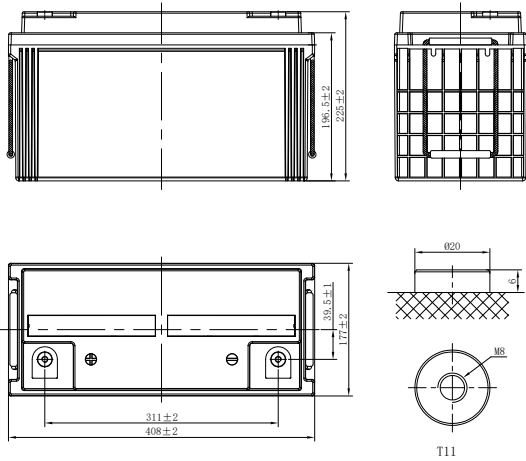

CHARACTERISTICS

Item	Specifications	
Rated Voltage	12V	
Nominal Rate (25°C)	W ₁₅ , 1.67V/cell	460W/cell
Nominal Capacity (25°C)	C _{10t} , 1.80V/cell	120Ah
Dimension	Length	408mm (16.1inches)
	Width	177mm (6.97inches)
	Container Height	225mm (8.86inches)
	Total Height	225mm (8.86inches)
Approx Weight	37.5kg (82.7lbs)	
Terminal	T11(M8)	
Container Material	ABS (UL94 HB or V-0 optional)	
Short-circuit current	2400A	
Internal Resistance (25°C)	Approx 3.8 mΩ (Fully charged)	
Operating Temp. Range	Discharge	-20~55°C (-4~131°F)
	Charge	-20~40°C (-4~104°F)
	Storage	-15~50°C (5~122°F)
Nominal Operating Temp. Range	25±3°C (77±5°F)	
Max.Charging Current (25°C)	0.25C	
Charge voltage (25°C)	Float Charge	Equalization Charge
	2.25-2.30V/cell	2.30-2.40V/cell
Temp. Coefficient	-3mV/cell/°C	-4mV/cell/°C
	40°C (104°F)	106%
Effect of temp. to Capacity	25°C (77°F)	100%
	0°C (32°F)	86%
	Self Discharge	≤ 3% per month at 25°C (77°F)

DISCHARGE TABLE

Constant Current Discharge (Amperes) at 25°C (77°F)														
F.V/Time	5min	10min	15min	20min	30min	45min	1h	1.5h	2h	3h	4h	5h	8h	10h
1.85V/cell	275.2	219.7	190.5	149.8	103.8	81.5	66.0	48.5	39.7	29.5	23.4	19.8	13.7	11.7
1.80V/cell	312.9	249.4	215.8	169.3	117.0	86.5	68.3	50.0	42.0	30.5	24.2	20.5	13.9	12.0
1.75V/cell	339.9	270.4	233.7	182.8	125.9	91.7	71.1	52.0	43.6	31.2	25.0	21.1	14.1	12.1
1.70V/cell	363.4	288.3	248.2	193.9	133.5	96.3	74.2	54.2	44.6	31.9	25.6	21.6	14.3	12.2
1.67V/cell	376.1	297.5	255.4	199.1	136.6	98.9	75.0	55.6	45.7	32.5	26.0	21.9	14.4	12.3
1.60V/cell	389.4	307.6	263.3	204.3	140.0	101.4	76.4	57.5	46.6	33.4	26.6	22.3	14.5	12.4

Constant Power Discharge (Watts/cell) at 25°C (77°F)														
F.V/Time	5min	10min	15min	20min	30min	45min	1h	1.5h	2h	3h	4h	5h	8h	10h
1.85V/cell	513.9	413.3	360.6	284.9	198.4	156.7	127.7	94.0	77.2	57.7	45.8	38.9	27.1	23.2
1.80V/cell	574.9	462.3	403.4	318.7	221.9	165.3	131.3	96.3	81.3	59.3	47.3	40.3	27.6	23.8
1.75V/cell	613.5	493.4	430.6	340.1	236.8	174.2	136.1	99.9	84.1	60.5	48.8	41.3	27.8	23.9
1.70V/cell	645.0	518.7	452.6	357.6	249.0	181.6	141.3	103.5	85.7	61.6	49.7	42.1	28.2	24.0
1.67V/cell	655.5	527.2	460.0	363.4	253.0	185.5	142.1	105.7	87.4	62.6	50.2	42.5	28.4	24.4
1.60V/cell	664.7	534.5	466.4	368.5	256.5	188.3	143.6	108.5	88.6	63.9	51.1	43.2	28.5	24.5

LHR SERIES-HIGH RATE

LHR12460W (12V460W)



APPLICATIONS

- UPS
- Hospitals and Testing Laboratories
- Emergency Power Supply
- Industrial Process Control Facilities
- Banks and Financial Markets
- Data and Network Operation Centers


GENERAL FEATURES

- 12 years design life (25°C)
- Excellent high current performance - optimised for short discharge time
- Advanced AGM technology for superior high-rate power
- Long Life Alloy - minimizing grid growth, reducing gassing, and extending battery life
- Epoxy-sealed posts eliminate leaks
- Optimal energy density - saves floor space


STANDARDS

- Compliance with IEC 60896 standards
- Classified as "Long Life" according to Eurobat
- CE,UL Approved
- Manufactured in Leoch@IATF 16949, ISO 45001,ISO 9001 and ISO 14001 certified production facilities


Discharge Characteristics

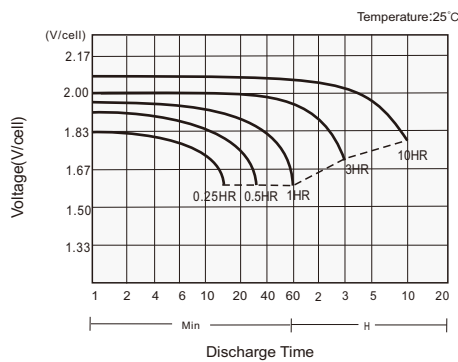

Charging Characteristics

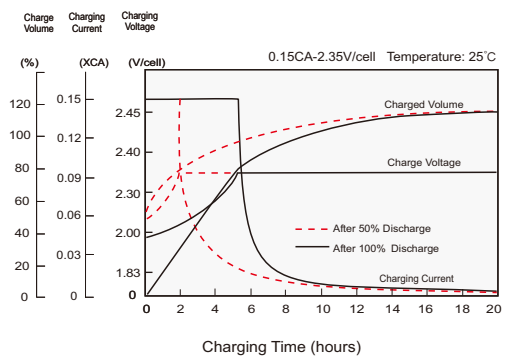

Effects of Temperature on Capacity

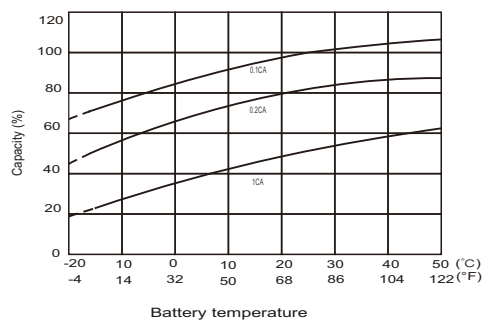

Self Discharge Characteristics

