





# LP Series-General Purpose LP2-2000(2V2000Ah)

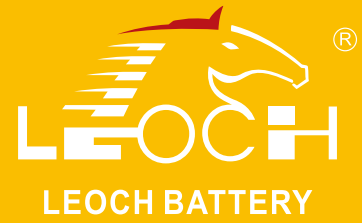


## Specifications

Rated Voltage	2V	
Nominal Capacity	C <sub>10</sub> , 1.80V/cell	2000Ah
Dimension	Length	490±3mm (19.3 inches)
	Width	350±3mm (13.8 inches)
	Container Height	339±3mm (13.4 inches)
	Total Height	349±3mm (13.7 inches)
Approx Weight	121.0kg (266.8 lbs)	
Terminal	T11(M8)	
Container Material	ABS	
Rated Capacity(25°C)	2120.0 Ah	C20(106.0A, 1.80V/cell)
	2000.0 Ah	C10(200.0A, 1.80V/cell)
	1650.0 Ah	C5(350.0A, 1.75V/cell)
	1560.0 Ah	C3(520.0A, 1.75V/cell)
Max. Discharge Current	16000A (5s)	
	Internal Resistance(25°C)	
Operating Temp. Range	Discharge	-15 ~ 50°C (5 ~ 122°F)
	Charge	-20 ~ 40°C (-4 ~ 104°F)
	Storage	-15 ~ 40°C (5 ~ 104°F)
Nominal Operating Temp. Range	25±3°C (77±5°F)	
Standby Use	Initial Charging Current less than 600A. Voltage 2.25V~2.30V at 25°C(77°F)Temp. Coefficient -3mV/°C	
Cycle Use	Initial Charging Current less than 600A. Voltage 2.40V~2.50V at 25°C(77°F)Temp. Coefficient -5mV/°C	
Effect of temp. to Capacity	40°C (104°F)	103%
	25°C (77°F)	100%
	0°C (32°F)	86%
Self Discharge	LP series batteries may be stored for up to 6 months at 25°C(77°F) and then a freshening charge is required. For higher temperatures the time interval will be shorter.	

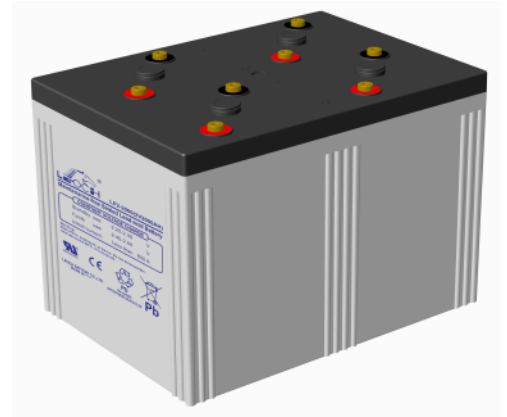

## Layout

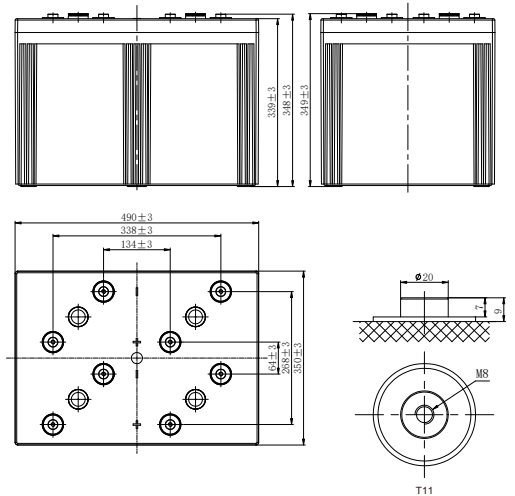


## Constant Current Discharge (Amperes) at 25°C (77°F)

F.V/Time	30min	45min	1h	1.5h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	1392.1	1100.6	963.3	759.6	615.3	468.1	376.5	317.7	275.8	224.2	187.4	100.5
1.80V/cell	1573.8	1230.7	1066.1	831.0	669.5	506.5	405.9	342.2	295.8	240.0	200.0	106.0
1.75V/cell	1644.9	1280.7	1105.5	859.0	690.0	520.0	416.0	350.0	302.0	244.4	203.1	107.4
1.70V/cell	1756.4	1329.3	1146.1	888.0	712.0	535.2	426.5	358.0	308.5	248.7	206.3	108.7
1.67V/cell	1877.8	1359.2	1170.0	904.1	723.9	543.3	432.4	362.4	312.2	251.3	208.1	109.5
1.60V/cell	1899.3	1429.4	1226.9	944.4	754.1	563.3	446.8	373.5	320.9	257.2	212.5	111.5

## Constant Power Discharge (Watts/cell) at 25°C (77°F)

F.V/Time	30min	45min	1h	1.5h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	2690.4	2134.1	1872.4	1481.0	1202.6	917.8	739.9	625.5	543.8	442.9	370.9	199.8
1.80V/cell	3016.2	2368.8	2058.2	1611.1	1301.8	989.0	794.8	671.7	581.8	473.2	395.2	210.6
1.75V/cell	3125.8	2446.1	2119.2	1655.1	1334.4	1011.0	811.6	684.8	592.3	480.9	400.7	213.1
1.70V/cell	3307.4	2519.0	2181.9	1700.9	1369.8	1035.8	829.1	698.4	603.6	488.4	406.3	215.6
1.67V/cell	3502.0	2562.7	2216.8	1725.0	1387.8	1048.5	838.6	705.5	609.7	492.8	409.4	217.1
1.60V/cell	3511.8	2666.6	2302.8	1787.1	1435.1	1080.7	862.1	724.0	624.2	502.9	417.0	220.8

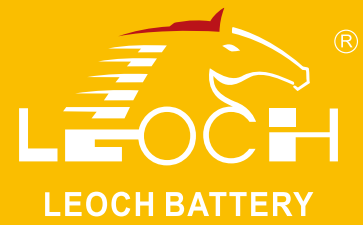

# LP Series-General Purpose LP2-2000(2V2000Ah)

## Applications

- Tele-communication central station (wired or cellular)
- Power system communication, military communication, etc.
- Network communication including: data transmission, television signal transmission, etc.
- Uninterruptable Power System (UPS- for Telecom)


## General Features

- 15 years design life(25°C)
- Special exhaust structure and sealing technology, safe and reliable, flexible installation, convenient maintenance
- PbCaSn alloy for plate grids: less gassing, less self-discharging
- High quality AGM separator: extend cycle life and prevent micro short circuit
- High purity raw material: ensure low self discharge rate


## Standards

- Compliance with IEC 60896 standards, EU Battery Directive
- UL, CE Certified
- Manufactured in Leoch®IATF 16949, ISO420001, ISO 9001 and ISO 120001 certified production facilities


## Discharge Characteristics

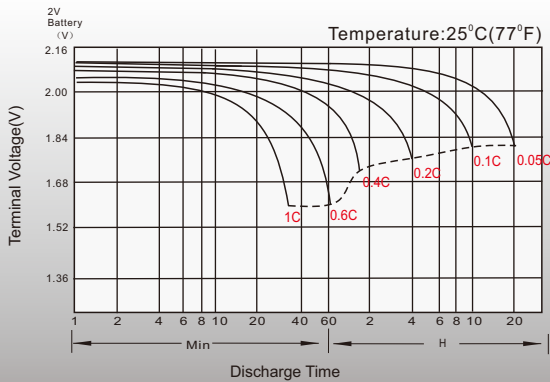


## Float Charging Characteristics

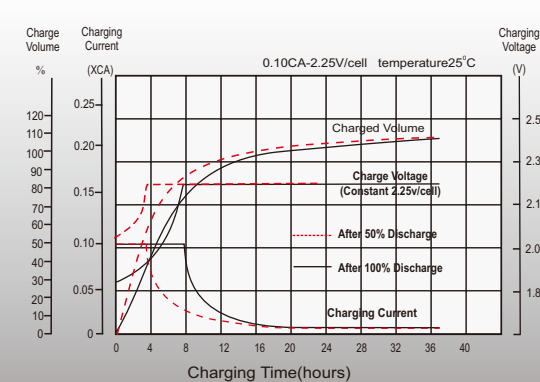

## Temperature Effects in Relation to Battery Capacity

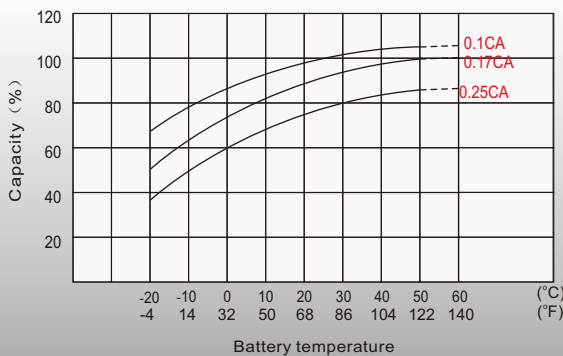

## Effect of Temperature on Long Term Float Life

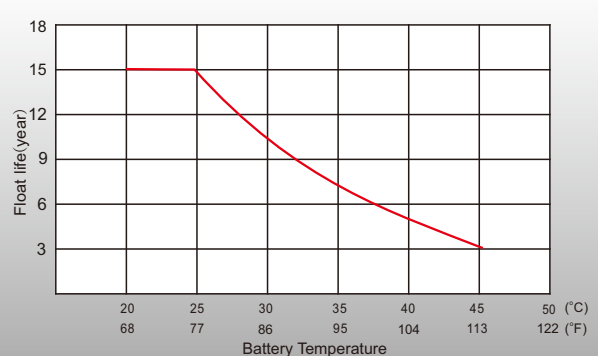

## Sales Offices Worldwide

### China Sales Office

5th Floor, Xinbaohui Bldg., Nanhai Blvd.,  
Nanshan, Shenzhen, China. 518052  
Tel: +86-755-86036060 (100 lines)  
Fax: +86-755-26067269  
E-mail: export@leoch.com

### HongKong Sales Office

Workshop C, 33/F, TML Tower, No. 3 Hoi Shing Road,  
Tsuen Wan, New Territories, Hong Kong  
Tel: +852 35786666  
Fax: +44 1452 690125  
E-mail: sales.hk@leoch.com

### Singapore Sales Office

No. 1 Tech Park Crescent,  
Singapore 638131  
Tel: +65 68636078  
Fax: +65 6863 6079  
Email: sales.sg@leoch.com

### Australia Sales Office

2 /29 Tarlington Place, Smithfield, NSW 2164  
Australia  
Tel: 02 9756 0950  
E-mail: sales.au@leoch.com

### North America Sales Office

19751 Descartes  
Foothill Ranch, CA 92610, USA  
Tel: 949-588-5853  
Fax: 949-588-5966  
E-mail: sales@leoch.us  
Http:// www.leoch.us

### UK Sales Office

9B Wheatstone Court, Waterwells, Business Park,  
Gloucester, GL2-2AQ, UK United Kingdom  
Tel: +44(0) 1452 729428 / 1452 729696  
Fax: +44 1452 690125  
E-mail: Sales.Europe@leoch.com  
Http:// www.leoch.eu

### EMEA Sales Office

1 Deligiorgi St., 121 31 Athens,  
Greece  
Tel: +30 210 5760318 (2 lines)  
E-mail: support\_EMEA@leoch.com  
Http:// www.leoch.eu

### India Sales Office

Shed no.A-53(b), 2nd Stage of Peenya Industrial Area,  
Bangalore North Taluk, Bangalore-5200058, India  
Tel: +91-80-234200018/234200019  
Fax: +91-80-234200017  
E-mail: indiasales@leoch.com



[Http://www.leoch.com](http://www.leoch.com)

© 2022 LEOCH. All rights reserved.

Trademarks and logos are the property of LEOCH and its affiliates unless otherwise noted.  
Subject to revisions without prior notice.

Publication No.: LB-LP2-2000-PD-EN-V3.1-202211