




# LPL Series-Long Life Standby LPL12-150(12V150Ah)

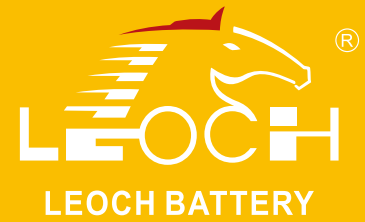


## Specifications

Rated Voltage	12V	
Nominal Capacity	C <sub>10</sub> , 1.80V/cell	150Ah
Dimension	Length	483±2mm (19.0 inches)
	Width	170±2mm (6.69 inches)
	Container Height	238.5±2mm (9.39 inches)
	Total Height	238.5±2mm (9.39 inches)
Approx Weight	46.5kg (102.5 lbs)	
Terminal	M8	
Container Material	ABS	
Rated Capacity(25°C)	157.6 Ah	C20(7.88A, 1.80V/cell)
	150.0 Ah	C10(15.0A, 1.80V/cell)
	127.5 Ah	C5(25.5A, 1.75V/cell)
	116.1Ah	C3(38.7A, 1.75V/cell)
	87.5 Ah	C1(87.5A, 1.60V/cell)
Max. Discharge Current	1500A (5s)	
Internal Resistance(25°C)	Approx 3.5mΩ	
Operating Temp. Range	Discharge	-15 ~ 50°C (5 ~ 122°F)
	Charge	-20 ~ 40°C (-4 ~ 104°F)
	Storage	-15 ~ 40°C (5 ~ 104°F)
Nominal Operating Temp. Range	25±3°C (77±5°F)	
Standby Use	Initial Charging Current less than 45A. Voltage 2.23V~2.27V at 25°C(77°F)Temp. Coefficient -3mV/°C	
Equalization Use	Initial Charging Current less than 45A. Voltage 2.35V~2.40V at 25°C(77°F)Temp. Coefficient -4mV/°C	
Cycle Use	Initial Charging Current less than 45A. Voltage 2.40V~2.50V at 25°C(77°F)Temp. Coefficient -5mV/°C	
Effect of temp. to Capacity	40°C (104°F)	103%
	25°C (77°F)	100%
	0°C (32°F)	86%
Self Discharge	LPL series batteries may be stored for up to 6 months at 25°C(77°F) and then a freshening charge is required. For higher temperatures the time interval will be shorter.	



## Layout

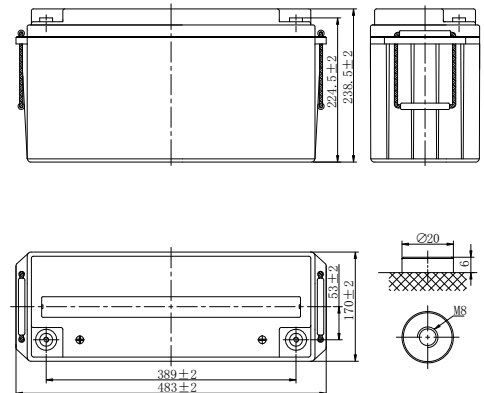

## Constant Current Discharge (Amperes) at 25°C (77°F)


F.V/Time	5min	10min	15min	30min	45min	1h	1.5h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	296.5	210.8	182.8	118.7	88.6	76.6	56.7	47.7	35.0	27.4	23.8	21.0	16.1	14.3	7.60
1.80V/cell	337.2	239.3	207.1	129.2	93.9	79.4	58.6	49.2	37.9	29.3	25.0	22.5	17.0	15.0	7.88
1.75V/cell	366.2	259.5	224.2	131.9	97.3	83.3	61.6	51.8	38.7	29.8	25.5	22.7	17.1	15.2	7.95
1.70V/cell	391.5	276.7	238.2	134.5	99.3	85.0	62.8	52.8	39.4	30.4	25.9	22.8	17.3	15.3	8.03
1.65V/cell	405.2	285.4	245.1	136.5	100.7	86.2	63.8	53.6	39.8	30.8	26.4	22.9	17.6	15.5	8.13
1.60V/cell	419.5	295.2	252.7	138.5	102.2	87.5	64.7	54.4	40.2	31.2	26.8	23.1	17.8	15.7	8.23

## Constant Power Discharge (Watts/cell) at 25°C (77°F)

F.V/Time	5min	10min	15min	30min	45min	1h	1.5h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	553.7	396.6	346.1	226.8	170.4	148.3	109.9	92.7	68.3	53.8	46.9	41.5	32.0	28.5	15.1
1.80V/cell	619.4	443.7	387.1	245.0	179.4	152.7	113.1	95.3	73.8	57.2	49.1	44.4	33.6	29.8	15.7
1.75V/cell	661.1	473.5	413.2	248.1	184.8	159.5	118.4	99.9	75.0	58.1	49.8	44.6	33.7	30.1	15.8
1.70V/cell	695.0	497.8	434.4	250.9	187.2	161.9	120.2	101.4	76.2	58.9	50.5	44.7	34.2	30.3	15.9
1.65V/cell	706.3	505.9	441.4	252.7	188.8	163.3	121.4	102.5	76.6	59.6	51.3	44.8	34.6	30.7	16.1
1.60V/cell	716.2	513.0	447.6	253.8	189.8	164.5	122.3	103.3	76.9	60.0	51.8	45.0	34.9	31.0	16.3



# LPL Series-Long Life Standby LPL12-150(12V150Ah)

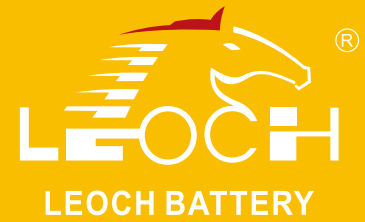

## Applications

- UPS and EPS
- Emergency light
- Railway signal and aircraft signal system
- Marine and power stations
- Alarm and security system
- Electronic apparatus and equipment
- Communication power supply, DC power supply


## General Features

- 12 years design life (25°C)
- Grid refining technology and the thicker plates are used to extend the battery standby life and reduce the plate grid corrosion speed
- Using oxygen recombination technology: maintenance-free
- Unique vent valve design: control water losing, prevent air and spark going inside


## Standards

- Compliance with IEC 60896 standards, EU Battery Directive
- UL, CE Certified
- Manufactured in Leoch@IATF16949, ISO 45001, ISO 9001 and ISO 14001 certified production facilities


### Discharge Characteristics

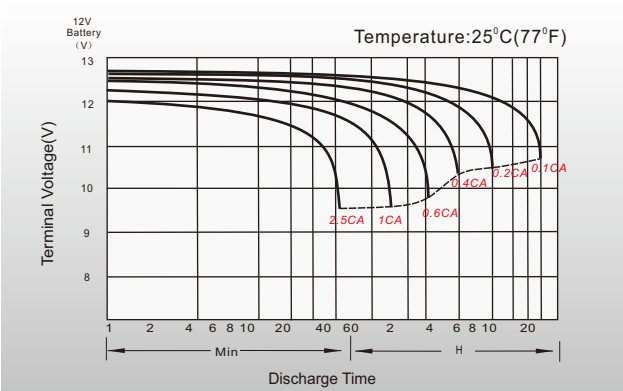


### Float Charging Characteristics

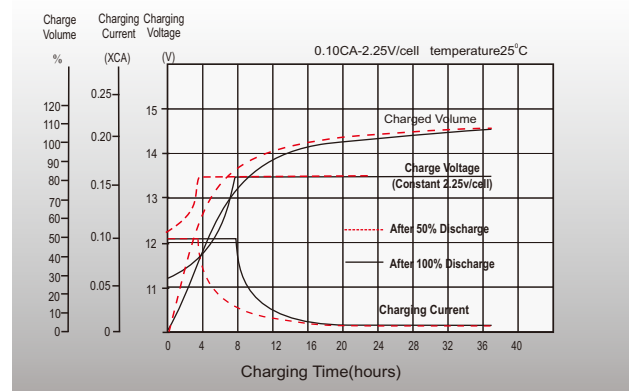

### Temperature Effects in Relation to Battery Capacity

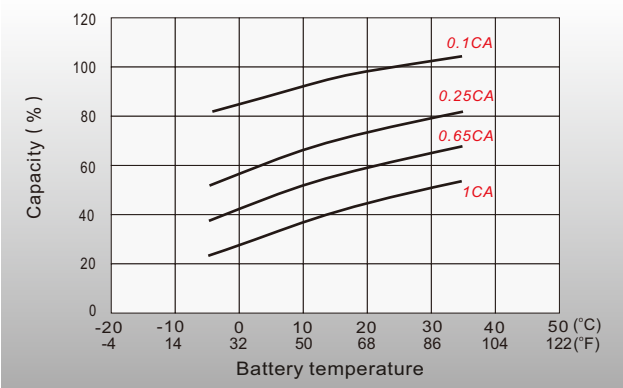

### Effect of Temperature on Long Term Float Life

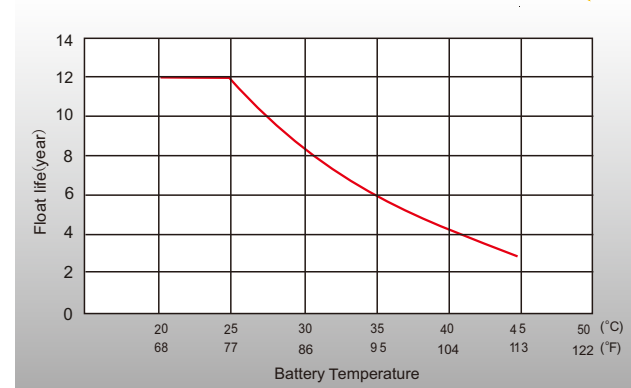

## Sales Offices Worldwide

### China Sales Office

5th Floor, Xinbaohui Bldg., Nanhai Blvd.,  
Nanshan, Shenzhen, China. 518052  
Tel: +86-755-86036060 (100 lines)  
Fax: +86-755-26067269  
E-mail: export@leoch.com

### HongKong Sales Office

Workshop C, 33/F, TML Tower, No. 3 Hoi Shing Road,  
Tsuen Wan, New Territories, Hong Kong  
Tel: +852 35786666  
Fax: +44 1452 690125  
E-mail: sales.hk@leoch.com

### Singapore Sales Office

No. 1 Tech Park Crescent,  
Singapore 638131  
Tel: +65 68636078  
Fax: +65 6863 6079  
Email: sales.sg@Leoch.com

### Australia Sales Office

2/29 Tarlington Place, Smithfield. NSW 2164  
Australia  
Tel: 02 9756 0950  
E-mail: sales.au@leoch.com

### North America Sales Office

19751 Descartes  
Foothill Ranch, CA 92610, USA  
Tel: 949-588-5853  
Fax: 949-588-5966  
E-mail: sales@leoch.us  
Http://www.leoch.us

### UK Sales Office

9B Wheatstone Court, Waterwells, Business Park,  
Gloucester, GL2-2AQ, UK United Kingdom  
Tel: +44(0) 1452 729428 / 1452 729696  
Fax: +44 1452 690125  
E-mail: Sales.Europe@leoch.com  
Http://www.leoch.eu

### EMEA Sales Office

1 Deligiorgi St., 121 31 Athens,  
Greece  
Tel: +30 210 5760318 (2 lines)  
E-mail: support\_EMEA@leoch.com  
Http://www.leoch.eu

### India Sales Office

Shed no. A-53(b), 2nd Stage of Peenya Industrial Area,  
Bangalore North Taluk, Bangalore-560058, India  
Tel: +91-80-23440018/23440019  
Fax: +91-80-23440017  
E-mail: indiasales@leoch.com



[Http://www.leoch.com](http://www.leoch.com)

© 1999-2020 LEOCH. All rights reserved.

Trademarks and logos are the property of LEOCH and its affiliates unless otherwise noted.

Subject to revisions without prior notice.

Publication No.: LB-LPL12-150-PD-EN-V3.1-202110