




# LPL Series-Long Standby Life LPL12-24(12V24Ah)

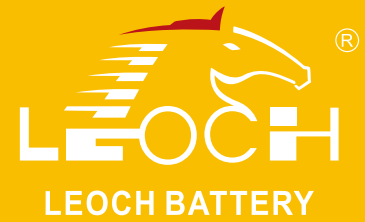


## Specifications

Rated Voltage	12V	
Nominal Capacity	24.0Ah	(C <sub>20</sub> , 1.75V/cell)
Dimension	Length	166±2mm (6.54 inches)
	Width	175±2mm (6.89 inches)
	Container Height	125±2mm (4.92 inches)
	Total Height	125±2mm (4.92 inches)
Approx Weight	7.8 Kg (17.20 lbs)	
Terminal	M5	
Container Material	ABS	
Rated Capacity (25°C)	24.00 Ah	(20hr, 1.20A, 1.75V/cell)
	23.80 Ah	(10hr, 2.38A, 1.75V/cell)
	22.15 Ah	(5hr, 4.43A, 1.75V/cell)
	19.56 Ah	(3hr, 6.52A, 1.75V/cell)
	16.10 Ah	(1hr, 16.1A, 1.60V/cell)
Max. Discharge Current	360A (5s)	
Internal Resistance (25°C)	Approx 16.0mΩ	
Operating Temp. Range	Discharge	-15 ~ 50°C (5 ~ 122°F)
	Charge	-20 ~ 40°C (-4 ~ 104°F)
	Storage	-15 ~ 40°C (5 ~ 104°F)
Nominal Operating Temp. Range	25±3°C (77±5°F)	
Cycle Use	Initial Charging Current less than 7.2A. Voltage 14.4V~15.0V at 25°C(77°F)Temp. Coefficient -30mV/°C	
	Initial Charging Current less than 7.2A. Voltage 13.5V~13.8V at 25°C(77°F)Temp. Coefficient -20mV/°C	
Effect of temp. to Capacity	40°C (104°F)	103%
	25°C (77°F)	100%
	0°C (32°F)	86%
Self Discharge	LPL series batteries may be stored for up to 6 months at 25°C(77°F) and then a freshening charge is required. For higher temperatures the time interval will be shorter.	



## Layout

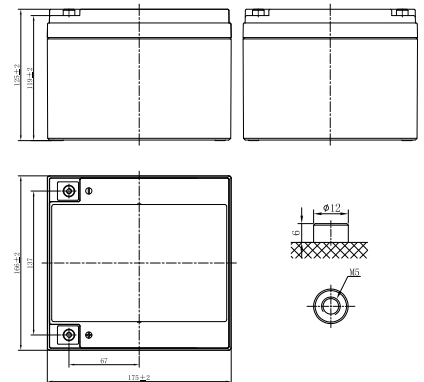

## Constant Current Discharge (Amperes) at 25 °C (77°F)


F.V/Time	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	45.9	37.3	31.6	23.8	18.0	14.8	8.46	6.33	5.07	4.32	3.69	2.90	2.33	1.18
1.80V/cell	48.2	38.8	32.6	24.4	18.4	15.0	8.59	6.43	5.15	4.38	3.74	2.94	2.35	1.19
1.75V/cell	50.6	40.2	33.5	25.0	18.8	15.3	8.73	6.52	5.22	4.43	3.79	2.97	2.38	1.20
1.70V/cell	52.9	41.6	34.5	25.5	19.1	15.6	8.86	6.62	5.29	4.49	3.84	3.01	2.41	1.21
1.65V/cell	54.4	42.5	35.1	25.9	19.3	15.7	8.95	6.67	5.33	4.53	3.87	3.03	2.43	1.22
1.60V/cell	57.6	44.4	36.5	26.7	19.9	16.1	9.13	6.81	5.43	4.61	3.94	3.08	2.46	1.24

## Constant Power Discharge (Watts/cell) at 25 °C (77°F)

F.V/Time	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	87.8	71.7	60.8	46.0	35.0	28.7	16.6	12.4	10.0	8.52	7.31	5.75	4.62	2.35
1.80V/cell	91.7	74.1	62.4	46.9	35.6	29.1	16.8	12.6	10.1	8.63	7.39	5.82	4.67	2.37
1.75V/cell	95.7	76.4	63.9	47.8	36.1	29.6	17.0	12.8	10.2	8.73	7.47	5.89	4.73	2.40
1.70V/cell	99.6	78.7	65.6	48.7	36.7	30.0	17.2	12.9	10.4	8.83	7.56	5.95	4.78	2.42
1.65V/cell	101.9	80.1	66.5	49.3	37.0	30.2	17.4	13.0	10.4	8.89	7.61	5.99	4.81	2.44
1.60V/cell	107.2	83.2	68.6	50.5	37.8	30.8	17.6	13.2	10.6	9.02	7.73	6.09	4.88	2.47



# LPL Series-Long Standby Life LPL12-24(12V24Ah)

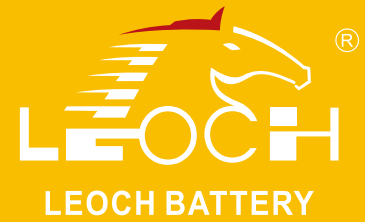

## Applications

- UPS and EPS
- Emergency light
- Railway signal and aircraft signal system
- Marine and power stations
- Alarm and security system
- Electronic apparatus and equipment
- Communication power supply, DC power supply


## General Features

- 10 ~ 12 years design life(20°C)
- Grid refining technology and the thicker plates are used to extend the battery standby life and reduce the plate grid corrosion speed
- Using oxygen recombination technology: maintenance-free
- Unique vent valve design: control water losing, prevent air and spark going inside


## Standards

- Compliance with IEC 60896 standards, EU Battery Directive
- UL, CE Certified
- Manufactured in Leoch@IATF16949, ISO 45001, ISO 9001 and ISO 14001 certified production facilities


## Discharge Characteristics

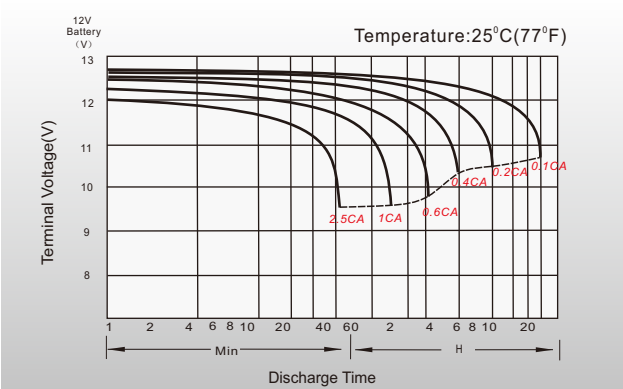


## Float Charging Characteristics

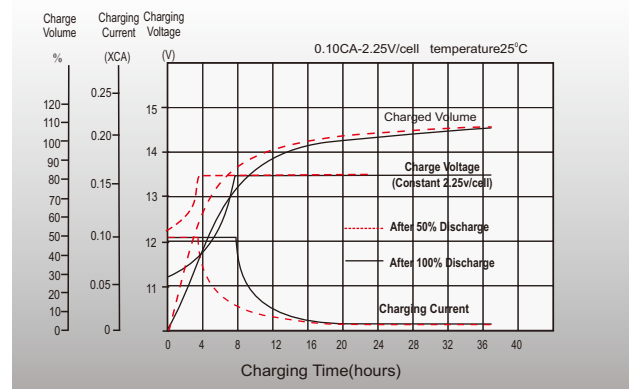

## Temperature Effects in Relation to Battery Capacity

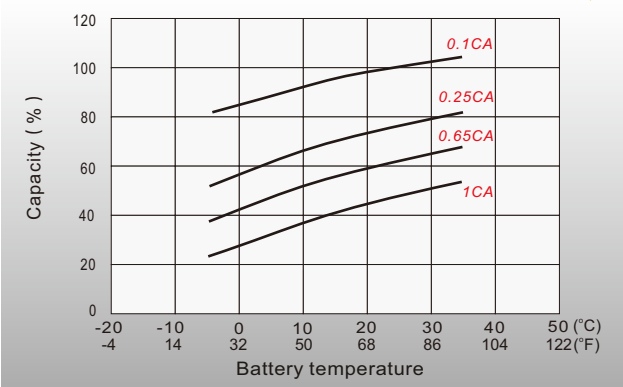

## Effect of Temperature on Long Term Float Life

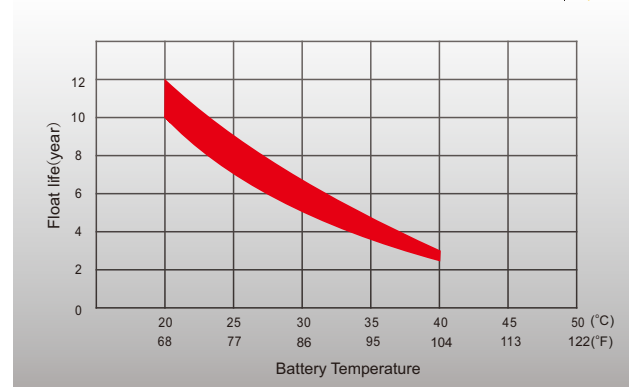

## Sales Offices Worldwide

### China Sales Office

5th Floor, Xinbaohui Bldg., Nanhai Blvd.,  
Nanshan, Shenzhen, China. 518052  
Tel: +86-755-86036060 (100 lines)  
Tel: +86-755-26067269  
E-mail: export@leoch.com

### HongKong Sales Office

Workshop C, 33/F, TML Tower, No. 3 Hoi Shing Road,  
Tsuen Wan, New Territories, Hong Kong  
Tel: +852 35786666  
Tel: +44(0) 1452 729428 / 1452 729696  
Fax: +44 1452 690125  
E-mail: sales.hk@leoch.com

### Singapore Sales Office

No. 1 Tech Park Crescent,  
Singapore 638131  
Tel: +65 68636078  
Tel: +65 6863 6079  
Email: sales.sg@leoch.com

### Australia Sales Office

2 /29 Tarlington Place, Smithfield. NSW 2164  
Australia  
Tel: 02 9756 0950  
E-mail: sales.au@leoch.com

### North America Sales Office

19751 Descartes  
Foothill Ranch, CA 92610, USA  
Tel: 949-588-5853  
Tel: 949-588-5966  
E-mail: sales@leoch.us  
Http://www.leoch.us

### UK Sales Office

9B Wheatstone Court. Waterwells, Business Park,  
Gloucester, GL2-2AQ, UK United Kingdom  
Tel: +44(0) 1452 729428 / 1452 729696  
Tel: +44 1452 690125  
E-mail: Sales.Europe@leoch.com  
Http://www.leoch.eu

### EMEA Sales Office

1 Deligiorgi St., 121 31 Athens,  
Greece  
Tel: +30 210 5760318 (2 lines)  
Tel: +30 210 5760318 (2 lines)  
E-mail: support\_EMEA@leoch.com  
Http://www.leoch.eu

### India Sales Office

Shed no.A-53(b), 2nd Stage of Peenya Industrial Area,  
Bangalore North Taluk, Bangalore-560058, India  
Tel: +91-80-23440018/23440019  
Tel: +91-80-23440017  
E-mail: indiasales@leoch.com



[Http://www.leoch.com](http://www.leoch.com)

© 2021 LEOCH. All rights reserved.  
Trademarks and logos are the property of LEOCH and its affiliates unless otherwise noted.  
Subject to revisions without prior notice.

Publication No.: LB-LPL12-24-PD-EN-V3.0-202107