




LPG Series-Gel Battery

LPG2-2000(2V2000Ah)




Specifications

Rated Voltage	2V	
Nominal Capacity	2000.0Ah (C ₁₀ , 1.80V/cell)	
Dimension	Length	490±2mm (19.3 inches)
	Width	350±2mm (13.8 inches)
	Container Height	339±2mm (13.3 inches)
	Total Height	349±2mm (13.7 inches)
Approx Weight	132.5 Kg (292.2 lbs)	
Terminal	M8	
Container Material	ABS	
Rated Capacity (25°C)	2120.0 Ah	C20(106.0A, 1.80V/cell)
	2000.0 Ah	C10(200.0A, 1.80V/cell)
	1718.0 Ah	C5(343.6A, 1.75V/cell)
	1542.0 Ah	C3(514.0A, 1.75V/cell)
	945.7 Ah	C1(945.7A, 1.60V/cell)
Max. Discharge Current	16000A (5s)	
Internal Resistance (25°C)	Approx 0.34mΩ	
Operating Temp. Range	Discharge : -20 ~ 60°C (-4 ~ 140°F)	
	Charge : -20 ~ 40°C (-4 ~ 104°F)	
	Storage : -20 ~ 50°C (-4 ~ 122°F)	
Nominal Operating Temp. Range	25±3°C (77±5°F)	
Cycle Use	Initial Charging Current less than 500.0A. Voltage 2.40V~2.50V at 25°C(77°F)Temp. Coefficient -5mV/°C	
Standby Use	Initial Charging Current less than 500.0A. Voltage 2.23V~2.27V at 25°C(77°F)Temp. Coefficient -3mV/°C	
Effect of temp. to Capacity	40°C (104°F)	103%
	25°C (77°F)	100%
	0°C (32°F)	86%
Self Discharge	LPG series batteries may be stored for up to 6 months at 25°C(77°F) and then a freshening charge is required. For higher temperatures the time interval will be shorter.	

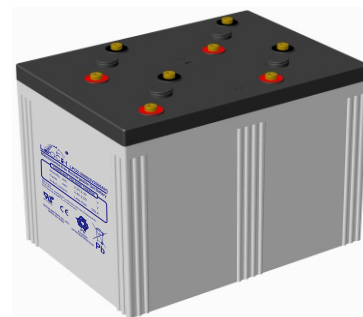

Layout

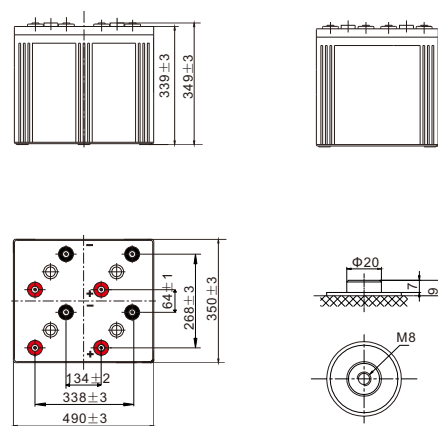

Constant Current Discharge (Amperes) at 25 °C (77°F)

F.V/Time	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	1920.1	1698.4	1403.2	1126.0	994.5	760.6	610.5	462.7	372.1	311.9	272.7	222.5	187.4	100.5
1.80V/cell	2232.9	1957.0	1586.4	1259.0	1100.7	832.2	664.2	500.6	401.1	336.0	292.5	238.2	200.0	106.0
1.75V/cell	2362.0	2053.5	1658.0	1310.2	1141.4	860.2	684.5	514.0	411.2	343.6	298.6	242.6	203.1	107.4
1.70V/cell	2496.4	2160.9	1731.1	1359.9	1183.3	889.3	706.4	529.0	421.6	351.4	305.0	246.9	206.3	108.7
1.67V/cell	2575.1	2222.0	1774.8	1390.5	1208.0	905.3	718.2	537.0	427.4	355.8	308.6	249.5	208.1	109.5
1.60V/cell	2760.0	2366.1	1875.1	1462.3	1266.8	945.7	748.1	556.8	441.6	366.7	317.3	255.4	212.5	111.5


Constant Power Discharge (Watts/cell) at 25 °C (77°F)

F.V/Time	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	3689.0	3272.3	2711.9	2183.2	1933.2	1483.1	1193.1	907.2	731.4	614.0	537.6	439.7	370.9	199.8
1.80V/cell	4245.0	3734.3	3040.3	2423.4	2125.0	1613.4	1291.5	977.6	785.6	659.4	575.2	469.8	395.2	210.6
1.75V/cell	4443.9	3880.5	3150.7	2502.5	2188.0	1657.5	1323.8	999.4	802.2	672.3	585.6	477.4	400.7	213.1
1.70V/cell	4643.8	4042.9	3259.7	2577.0	2252.8	1703.3	1359.0	1023.8	819.5	685.6	596.7	484.8	406.3	215.6
1.67V/cell	4758.5	4131.1	3324.2	2621.8	2288.8	1727.5	1376.8	1036.4	828.9	692.6	602.7	489.2	409.4	217.1
1.60V/cell	5010.5	4329.9	3466.9	2728.0	2377.6	1789.7	1423.7	1068.3	852.1	710.7	617.1	499.3	417.0	220.8



LPG Series-Gel Battery

LPG2-2000(2V2000Ah)

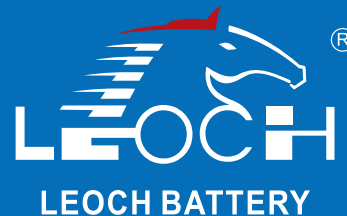

Applications

- Telecommunications
- Solar system
- Wind power system
- Engine starting
- Wheelchair, Floor cleaning machines, Golf trolley, Boats


General Features

- Battery design life up to 16 years
- Special plate design guarantees battery floating life more than 4000 times
- High thermal capacity reduce the risk of thermal out of control and drying hard, and the battery can be used in bad environment
- Little water losing, and no electrolyte stratification phenomenon


Standards

- IEC 60896 Certified
- Classified as "Very Long Life" according to Eurobat
- UL Certified
- Manufactured in Leoch® IATF16949, ISO 9001, ISO 14001 and ISO 45001 certified production facilities


Discharge Characteristics

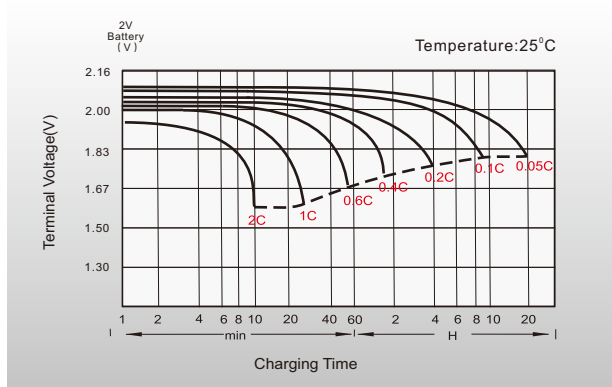


Float Charging Characteristics

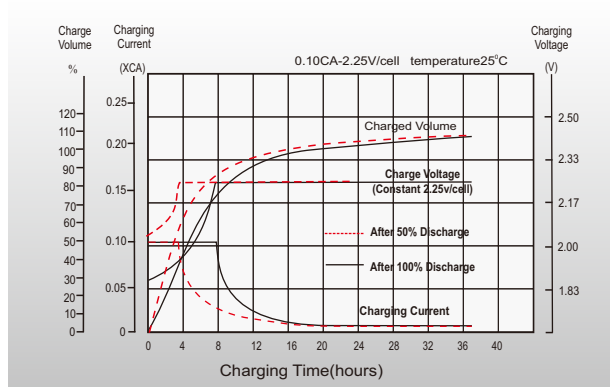

Cycle Life in Relation to Depth of Discharge

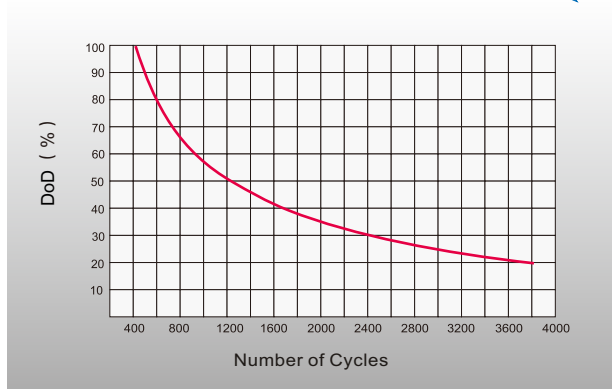

Effect of Temperature on Long Term Float Life

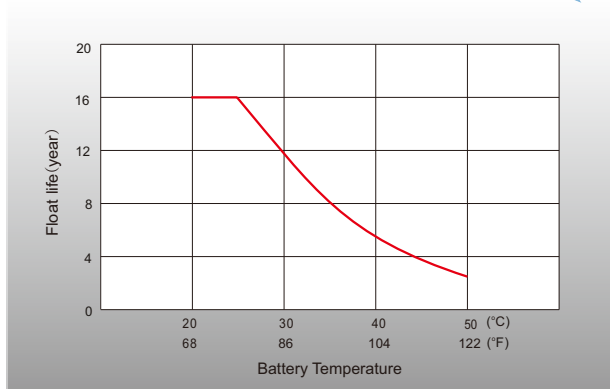

Sales Offices Worldwide

China Sales Office

5th Floor, Xinbaohui Bldg., Nanhai Blvd.,
Nanshan, Shenzhen, China. 518052
Tel: +86-755-86036060 (100 lines)
Fax: +86-755-26067269
E-mail: export@leoch.com

HongKong Sales Office

Workshop C, 33/F, TML Tower, No. 3 Hoi Shing Road,
Tsuen Wan, New Territories, Hong Kong
Tel: +852 35786666
Fax: +44 1452 690125
E-mail: sales.hk@leoch.com

Singapore Sales Office

No. 1 Tech Park Crescent,
Singapore 638131
Tel: +65 68636078
Fax: +65 6863 6079
Email: sales.sg@Leoch.com

Australia Sales Office

2/29 Tarlington Place, Smithfield, NSW 2164
Australia
Tel: 02 9756 0950
E-mail: sales.au@leoch.com

North America Sales Office

19751 Descartes
Foothill Ranch, CA 92610, USA
Tel: 949-588-5853
Fax: 949-588-5966
E-mail: sales@leoch.us

UK Sales Office

9B Wheatstone Court, Waterwells, Business Park,
Gloucester, GL2-2AQ, UK United Kingdom
Tel: +44(0) 1452 729428 / 1452 729696
Fax: +44 1452 690125
E-mail: Sales.Europe@leoch.com

EMEA Sales Office

1 Deligiorgi St., 121 31 Athens,
Greece
Tel: +30 210 5760318 (2 lines)
E-mail: support_EMEA@leoch.com

India Sales Office

Shed no. A-53(b), 2nd Stage of Peenya Industrial Area,
Bangalore North Taluk, Bangalore-560058, India
Tel: +91-80-23440018/23440019
Fax: +91-80-23440017
E-mail: indiasales@leoch.com