




# LPG Series-Gel Battery

## LPG2-600(2V600Ah)




### Specifications

Rated Voltage	2V	
Nominal Capacity	600.0Ah (C <sub>10</sub> , 1.80V/cell)	
Dimension	Length	300±2mm (11.8 inches)
	Width	175±2mm (6.89 inches)
	Container Height	330±2mm (13.0 inches)
	Total Height	340±2mm (13.4 inches)
Approx Weight	39.0 Kg (86.0 lbs)	
Terminal	M8	
Container Material	ABS	
Rated Capacity (25°C)	636.0 Ah	C20(31.8A, 1.80V/cell)
	600.0 Ah	C10(60.0A, 1.80V/cell)
	515.5 Ah	C5(103.1A, 1.75V/cell)
	462.6 Ah	C3(154.2A, 1.75V/cell)
	283.7 Ah	C1(283.7A, 1.60V/cell)
Max. Discharge Current	4800A (5s)	
Internal Resistance (25°C)	Approx 0.66mΩ	
Operating Temp. Range	Discharge : -20 ~ 60°C (-4 ~ 140°F)	
	Charge : -20 ~ 40°C (-4 ~ 104°F)	
	Storage : -20 ~ 50°C (-4 ~ 122°F)	
Nominal Operating Temp. Range	25±3°C (77±5°F)	
Cycle Use	Initial Charging Current less than 150.0A. Voltage 2.40V~2.50V at 25°C(77°F)Temp. Coefficient -5mV/°C	
Standby Use	Initial Charging Current less than 150.0A. Voltage 2.23V~2.27V at 25°C(77°F)Temp. Coefficient -3mV/°C	
Effect of temp. to Capacity	40°C (104°F)	103%
	25°C (77°F)	100%
	0°C (32°F)	86%
Self Discharge	LPG series batteries may be stored for up to 6 months at 25°C(77°F) and then a freshening charge is required. For higher temperatures the time interval will be shorter.	



### Layout

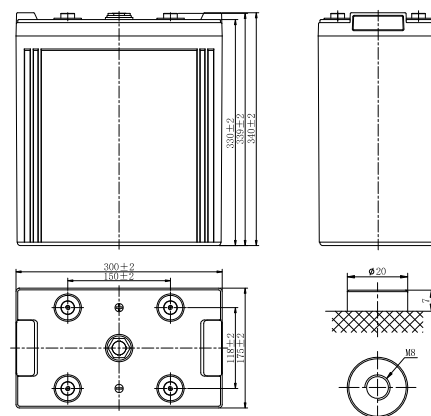

### Constant Current Discharge (Amperes) at 25 °C (77°F)

F.V/Time	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	576.0	509.5	420.9	337.8	298.4	228.2	183.1	138.8	111.6	93.6	81.8	66.8	56.2	30.1
1.80V/cell	669.9	587.1	475.9	377.7	330.2	249.7	199.3	150.2	120.3	100.8	87.7	71.5	60.0	31.8
1.75V/cell	708.6	616.1	497.4	393.1	342.4	258.1	205.4	154.2	123.4	103.1	89.6	72.8	60.9	32.2
1.70V/cell	748.9	648.3	519.3	408.0	355.0	266.8	211.9	158.7	126.5	105.4	91.5	74.1	61.9	32.6
1.67V/cell	772.5	666.6	532.4	417.1	362.4	271.6	215.5	161.1	128.2	106.7	92.6	74.8	62.4	32.9
1.60V/cell	828.0	709.8	562.5	438.7	380.0	283.7	224.4	167.0	132.5	110.0	95.2	76.6	63.8	33.4

### Constant Power Discharge (Watts/cell) at 25 °C (77°F)

F.V/Time	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	1106.7	981.7	813.6	655.0	580.0	444.9	357.9	272.2	219.4	184.2	161.3	131.9	111.3	59.9
1.80V/cell	1273.5	1120.3	912.1	727.0	637.5	484.0	387.5	293.3	235.7	197.8	172.6	140.9	118.6	63.2
1.75V/cell	1333.2	1164.2	945.2	750.7	656.4	497.2	397.1	299.8	240.7	201.7	175.7	143.2	120.2	63.9
1.70V/cell	1393.2	1212.9	977.9	773.1	675.8	511.0	407.7	307.2	245.9	205.7	179.0	145.5	121.9	64.7
1.67V/cell	1427.5	1239.3	997.3	786.5	686.6	518.2	413.1	310.9	248.7	207.8	180.8	146.8	122.8	65.1
1.60V/cell	1503.2	1299.0	1040.1	818.4	713.3	536.9	427.1	320.5	255.6	213.2	185.1	149.8	125.1	66.2



# LPG Series-Gel Battery

## LPG2-600(2V600Ah)



### Applications

- Telecommunications
- Solar system
- Wind power system
- Engine starting
- Wheelchair, Floor cleaning machines, Golf trolley, Boats


### General Features

- Battery design life up to 16 years
- Special plate design guarantees battery floating life more than 4000 times
- High thermal capacity reduce the risk of thermal out of control and drying hard, and the battery can be used in bad environment
- Little water losing, and no electrolyte stratification phenomenon


### Standards

- IEC 60896 Certified
- Classified as "Very Long Life" according to Eurobat
- UL Certified
- Manufactured in Leoch® IATF 16949, ISO 9001, ISO 14001 and ISO 145001 certified production facilities


### Discharge Characteristics

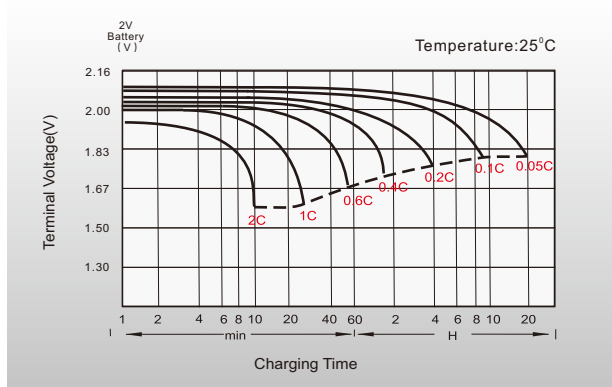


### Float Charging Characteristics

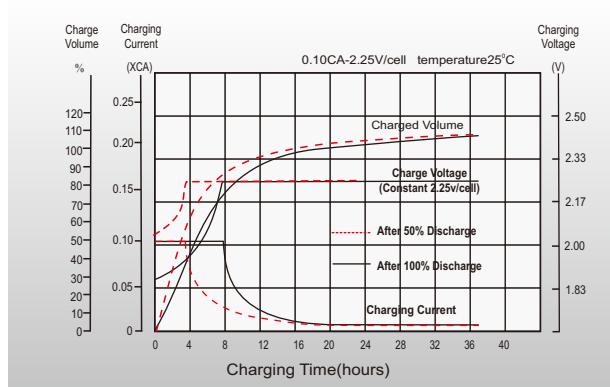

### Cycle Life in Relation to Depth of Discharge

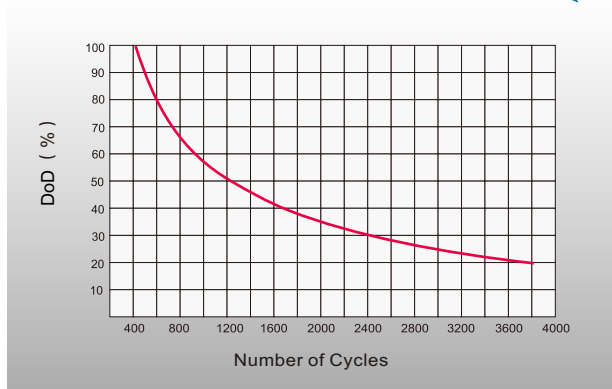

### Effect of Temperature on Long Term Float Life

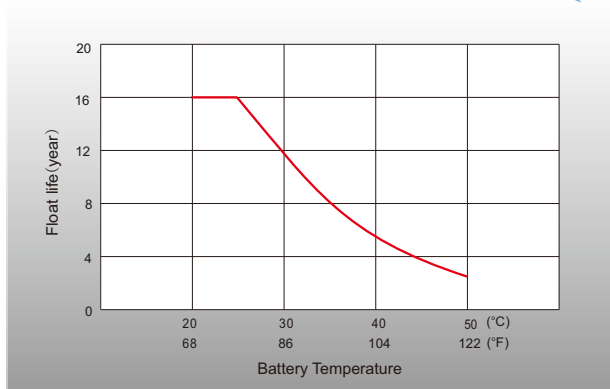

## Sales Offices Worldwide

#### China Sales Office

5th Floor, Xinbaohui Bldg., Nanhai Blvd.,  
Nanshan, Shenzhen, China. 518052  
Tel: +86-755-86036060 (100 lines)  
Fax: +86-755-26067269  
E-mail: export@leoch.com

#### HongKong Sales Office

Workshop C, 33/F, TML Tower, No. 3 Hoi Shing Road,  
Tsuen Wan, New Territories, Hong Kong  
Tel: +852 35786666  
Fax: +44 1452 690125  
E-mail: sales.hk@leoch.com

#### Singapore Sales Office

No. 1 Tech Park Crescent,  
Singapore 638131  
Tel: +65 68636078  
Fax: +65 6863 6079  
Email: sales.sg@Leoch.com

#### Australia Sales Office

2/29 Tarlington Place, Smithfield, NSW 2164  
Australia  
Tel: 02 9756 0950  
E-mail: sales.au@leoch.com

#### North America Sales Office

19751 Descartes  
Foothill Ranch, CA 92610, USA  
Tel: 949-588-5853  
Fax: 949-588-5966  
E-mail: sales@leoch.us

#### UK Sales Office

9B Wheatstone Court, Waterwells, Business Park,  
Gloucester, GL2-2AQ, UK United Kingdom  
Tel: +44(0) 1452 729428 / 1452 729696  
Fax: +44 1452 690125  
E-mail: Sales.Europe@leoch.com

#### EMEA Sales Office

1 Deligiorgi St., 121 31 Athens,  
Greece  
Tel: +30 210 5760318 (2 lines)  
E-mail: support\_EMEA@leoch.com

#### India Sales Office

Shed no. A-53(b), 2nd Stage of Peenya Industrial Area,  
Bangalore North Taluk, Bangalore-560058, India  
Tel: +91-80-23440018/23440019  
Fax: +91-80-23440017  
E-mail: indiasales@leoch.com