


LPG SERIES-GEL BATTERY

LPG12-60 (12V60Ah)

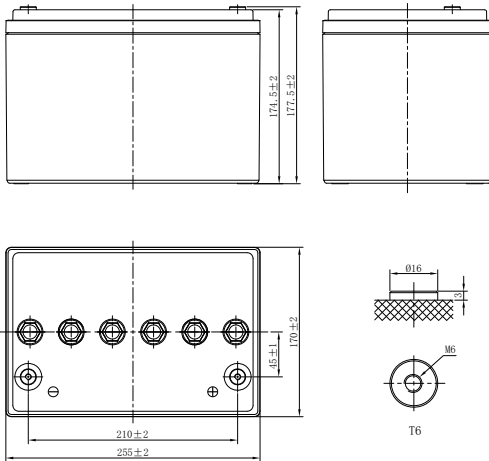

CHARACTERISTICS

Item	Specifications	
Rated Voltage	12V	
Nominal Capacity (25°C)	C ₂₀ : 1.80V/cell	60Ah
Dimension	Length	255mm (10.0inches)
	Width	170mm (6.69inches)
	Container Height	174.5mm (6.87inches)
	Total Height	177.5mm (6.99inches)
Approx Weight	18.5kg (40.8lbs)	
Terminal	T6(M6)	
Container Material	ABS (UL94 HB or V-0 optional)	
Short-circuit current	1260A	
Internal Resistance (25°C)	Approx 9.8 mΩ (Fully charged)	
Operating Temp. Range	Discharge	-20~60°C (-4~140°F)
	Charge	-20~40°C (-4~104°F)
	Storage	-20~50°C (-4~122°F)
Nominal Operating Temp. Range	25±3°C (77±5°F)	
Max.Charging Current (25°C)	0.25C	
Charge voltage (25°C)	Standby Use	Cycle Use
	2.23-2.27V/cell	2.35-2.40V/cell
Temp. Coefficient	-3mV/cell/°C	-5mV/cell/°C
	40°C (104°F)	103%
Effect of temp. to Capacity	25°C (77°F)	100%
	0°C (32°F)	86%
	≤2.5% per month at 25°C (77°F). LPG series batteries may be stored up to 9 months at 25°C (77°F) and then a freshening charge is required. For higher temperatures the time interval will be shorter.	
Self Discharge		

DISCHARGE TABLE

Constant Current Discharge (Amperes) at 25°C (77°F)															
F./V/Time	10min	15min	20min	30min	45min	1h	1.5h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	72.4	62.8	49.4	44.6	32.6	25.9	20.0	16.0	12.7	10.3	8.97	7.85	6.36	5.39	2.79
1.80V/cell	82.2	71.1	55.8	48.6	34.6	28.6	21.3	17.6	13.9	11.2	9.45	8.30	6.63	5.50	3.00
1.75V/cell	89.1	77.0	60.2	49.6	35.8	32.1	23.3	18.9	14.5	11.6	9.74	8.57	6.74	5.67	3.03
1.70V/cell	93.2	80.9	63.4	49.9	36.4	33.1	23.8	19.2	14.7	11.7	9.85	8.59	6.81	5.69	3.05
1.67V/cell	98.0	84.2	65.6	51.3	37.1	33.7	24.3	19.6	14.9	11.8	10.0	8.71	6.86	5.72	3.07
1.60V/cell	101.4	86.8	67.3	52.1	37.6	34.8	24.9	20.0	15.1	12.0	10.2	8.85	6.92	5.78	3.11
Constant Power Discharge (Watts/cell) at 25°C (77°F)															
F./V/Time	10min	15min	20min	30min	45min	1h	1.5h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	136.2	118.8	93.9	85.3	62.8	50.2	38.9	31.2	24.9	20.3	17.7	15.5	12.6	10.7	5.54
1.80V/cell	152.3	132.9	105.0	92.1	66.1	55.2	41.2	34.2	27.2	21.9	18.5	16.3	13.1	10.9	5.96
1.75V/cell	162.6	141.9	112.1	93.3	68.1	61.5	44.8	36.5	28.2	22.6	19.0	16.8	13.3	11.2	6.02
1.70V/cell	167.1	147.1	116.5	94.2	68.6	62.9	45.6	37.0	28.5	22.7	19.2	16.8	13.4	11.3	6.04
1.67V/cell	173.7	151.6	119.7	95.1	69.6	63.9	46.4	37.6	28.8	22.8	19.5	17.0	13.5	11.4	6.08
1.60V/cell	176.1	153.7	121.4	95.5	69.9	65.3	47.2	38.1	29.0	23.1	19.8	17.2	13.6	11.5	6.15

LPG SERIES-GEL BATTERY

LPG12-60 (12V60Ah)



APPLICATIONS

- Telecommunications
- Solar system
- Wind power system
- Engine starting
- Wheelchair, Floor cleaning machines, Golf trolley, Boats


GENERAL FEATURES

- 12 years design life (25°C)
- Gelled electrolyte for superior thermal management, long float life
- Efficient gas recombination decreases gassing/water and extends battery life
- Robust design - resilient in harsh conditions
- Proof against deep discharge - greater long-term energy delivery and cycle life


STANDARDS

- IEC60896 Certified
- Classified as "Long Life" according to Eurobat
- UL, CE Approved
- Manufactured in Leoch@IATF16949, ISO 45001, ISO 9001 and ISO 14001 certified production facilities


Discharge Characteristics

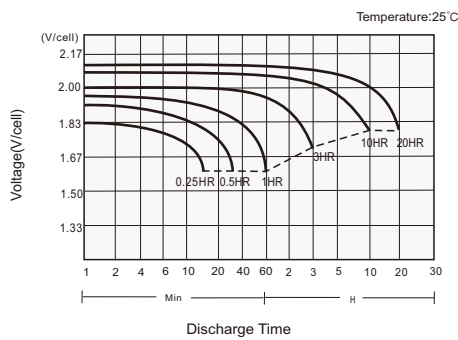

Charging Characteristics

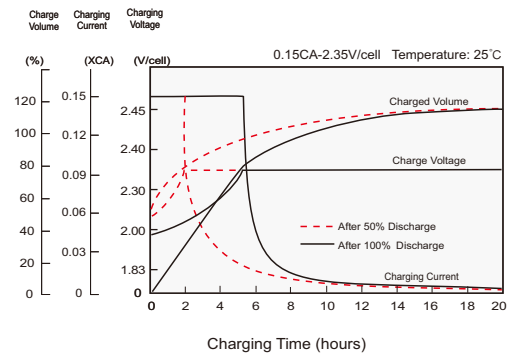

Cycle Life in Relation to DoD

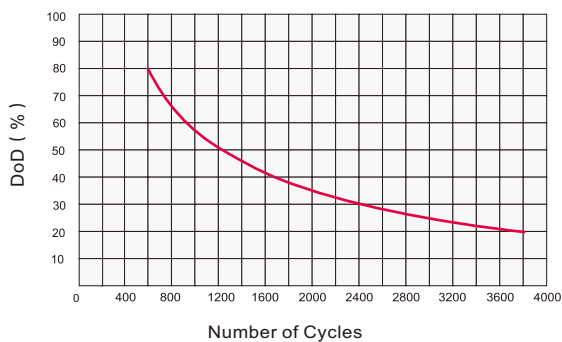

Self Discharge Characteristics

