

FLOODED BATTERY

65-670 (12V80Ah)



CHARACTERISTICS



| Item | Specifications | |
|--------------------------------|-------------------|--------------------|
| Nominal Voltage | 12V | |
| Nominal Capacity (20HR) | 80Ah | |
| Reserve Capacity | 138min | |
| Cold Cranking Amps@0°F (-18°C) | 670A | |
| Dimension | Length | 298mm (11.7inches) |
| | Width | 190mm (7.48inches) |
| | Height | 192mm (7.56inches) |
| Approx Weight | 21.1kg (46.5lbs) | |
| Terminal | 1 | |
| Cell layout | 1 | |
| Hold-Down | B01 | |
| Case | Black-PP Material | |
| Cover | Black-PP Material | |
| Handle | TS4 | |

APPLICATIONS

- Car start
- EV/HEV
- Engine start

GENERAL FEATURES

- High capacity and high CCA
- Long life
- Advanced lead-calcium alloy technology, maintenance-free design
- Patented venting system bring less water loss and prevent acid leakage
- OE quality certification

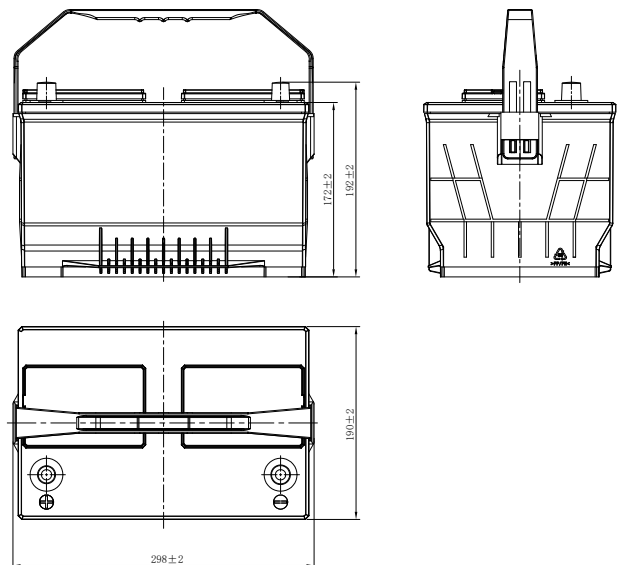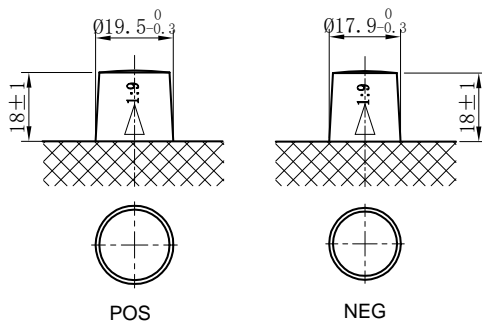

*Values are subject to variation of +/- 5% in normal manufacturing processes.

Leoch International Technology Ltd.
www.leoch.com

Leoch Batteries Pte Ltd
www.leoch.sg

Leoch Battery Corporation
www.leochamericas.com

Leoch Europe S.A.
www.leoch.eu