

HEAVY DUTY FLOODED BATTERY

225H52R (12V225Ah)



CHARACTERISTICS



Item	Specifications	
Nominal Voltage	12V	
Nominal Capacity (20HR)	225Ah	
Reserve Capacity	468min	
Cold Cranking Amps@0°F (-18°C)	1280A	
Dimension	Length	518mm (20.4inches)
	Width	274mm (10.8inches)
	Height	237.5mm (9.35inches)
Approx Weight	56.6kg (124.8lbs)	
Terminal	1	
Cell layout	3	
Hold-Down	B0	
Case	Black-PP Material	
Cover	Black-PP Material	
Handle	TS8	

APPLICATIONS

- Commercial vehicle start
- Engine start

GENERAL FEATURES

- High capacity and high CCA
- Maintenance-free
- High vibration resistance
- Strong lead-calcium alloy grids for great corrosion resistance
- High strength PP case and cover no need be worried about breakage
- OE quality certification

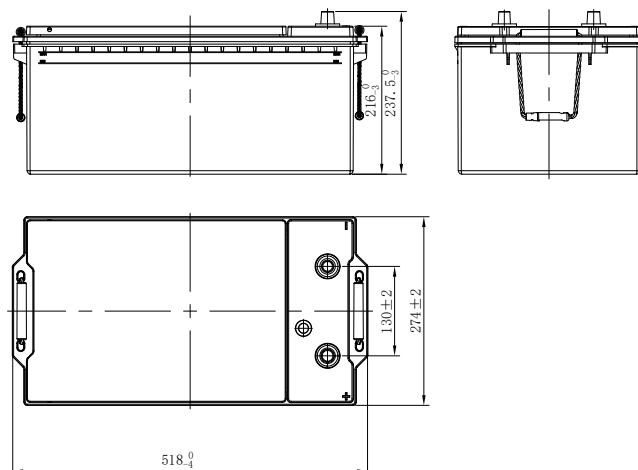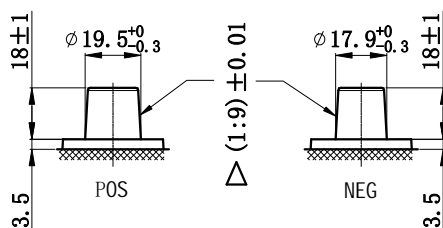

*Values are subject to variation of +/- 5% in normal manufacturing processes.

Leoch International Technology Ltd.
www.leoch.com

Leoch Batteries Pte Ltd
www.leoch.sg

Leoch Battery Corporation
www.leochamericas.com

Leoch Europe S.A.
www.leoch.eu