


Starter batteries for motorcycles

LFPS-X20H [12.8V7Ah]

Physical Specification

Nominal Voltage		12.8V
Nominal Capacity		7.0Ah
Dimension	Length	175 ± 2mm (6.89 inches)
	Width	87 ± 2mm (3.43 inches)
	Container Height	130 ± 2mm (5.12 inches)
	Total Height (with Terminal)	130 ± 2mm (5.12 inches)
Weight	Approx 1.23kg (2.71lbs)	

- * Motorcycle Li-ion battery
- * Powerful 420 cranking amps
- * Shipped pre-charged and ready to install
- * Built in BMS to monitor the battery status in real time and protect the battery
- * Replaces GYZ20H/YTX20H-BS/YTX20-BS/YB16-B-CX/YB16-B/YB18-A/Y50-N18A-A battery

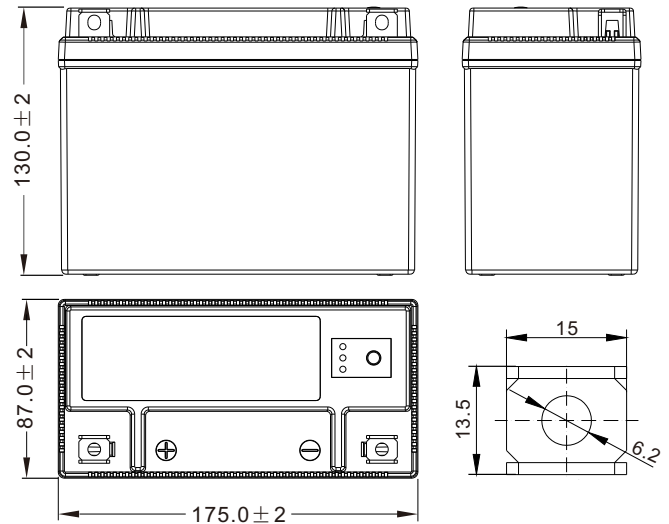



Dimensions (mm)

Electrical Specification

Rated Capacity	0.1C rate (0.7A)	7.0Ah
	0.5C rate (3.5A)	7.0Ah
	10C rate (70.0A)	6.3Ah
	60C rate (420.0A)	Peak Current
Capacity affected by Temperature	40 °C (104 °F)	98%
	25 °C (77 °F)	100%
	0 °C (32 °F)	85%
	-20 °C (-4 °F)	60%
Self Discharge	Approximately 1.5% per month (25°C (77°F))	
Charging Methods	Constant-Voltage Charge:	
	Full Charge	Initial charging current: less than 3.5A Voltage: 14.40 V ~ 14.60 V at 25 °C (77 °F)



Curve Specification

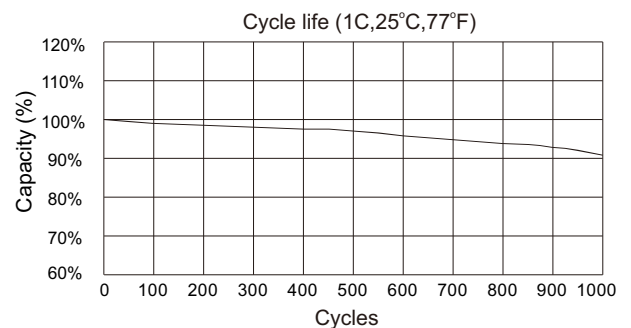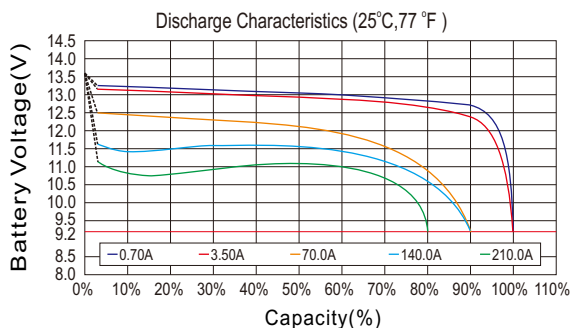

Publication No :LB-LFPS-X20H-PD-EN-V1.3-202112

