
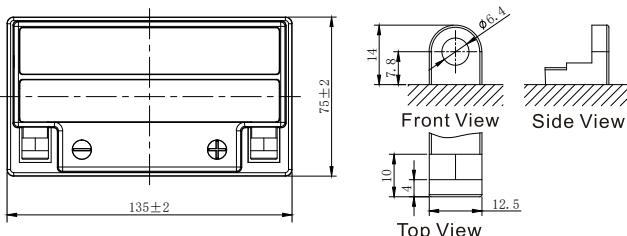


MAINTENANCE-FREE MOTORCYCLE BATTERY

EB9A-3-2 (12V9Ah)

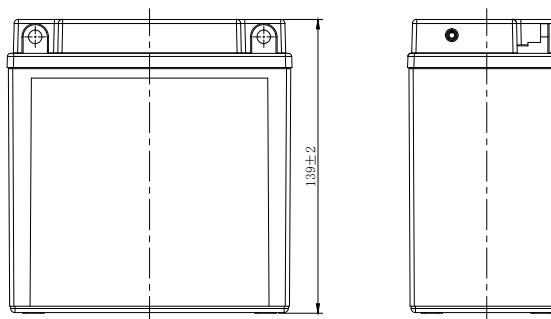


GENERAL FEATURES

- Maintenance-free
- Sealed and non-spillable AGM battery
- Shipped pre-charged and ready to install

CHARACTERISTICS

Item	Specifications
Nominal Voltage	12V
Nominal Capacity (10HR)	9Ah
Cold Cranking Performance Amps@0°F (-18°C)	100A
Dimension (±2mm)	<p>Length 135mm (5.31inches)</p> <p>Width 75mm (2.95inches)</p> <p>Container Height 139mm (5.47inches)</p> <p>Total Height 139mm (5.47inches)</p>
Battery (with acid)	Approx Weight 3.05kg (6.72lbs)
Terminal type	B
Battery type	Factory Activated Series
Constant-Voltage Charge:	
Initial charging current Less than 0.3C ₁₀	
Full Charge	<p>Voltage 14.40V~15.00V at 25°C (77°F)</p> <p>Charging time 15~18h</p>
Constant-Current Charge:	
Charging current 0.1C ₁₀ , when charging voltage up to 14.40V, continue to charge 4h	
Floating Charge	<p>Initial charging current Unlimited</p> <p>Voltage 13.50V~13.80V at 25°C (77°F)</p>
40°C (104°F) 106%	
Capacity affected by Temperature	<p>25°C (77°F) 100%</p> <p>0°C (32°F) 86%</p> <p>-15°C (5°F) 65%</p>

Discharge Characteristics (25°C, 77°F)

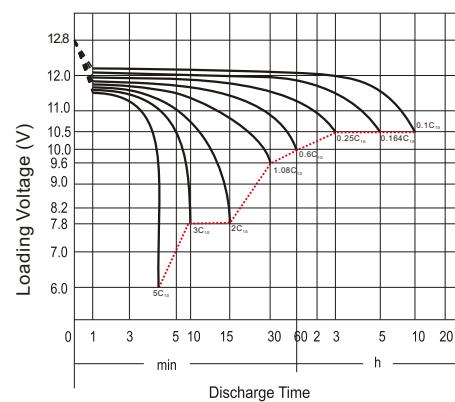

*Values are subject to variation of +/- 5% in normal manufacturing processes.

Leoch International Technology Ltd.

www.leoch.com

Leoch Batteries Pte Ltd

www.leoch.sg

Leoch Battery Corporation

www.leochamericas.com

Leoch Europe S.A.

www.leoch.eu

Data above is recommended and the picture is only for battery effect display, Leoch reserve the final right of explanation.

© LEOCH. All rights reserved. Trademarks and logos are the property of LEOCH and its affiliates unless otherwise noted. Subject to revisions without prior notice. E&OE.

Publication No.:LB-EB9A-3-2-PD-EN-V1.0-20251224