


MAINTENANCE-FREE MOTORCYCLE BATTERY

EBX7L-BS (12V6Ah)

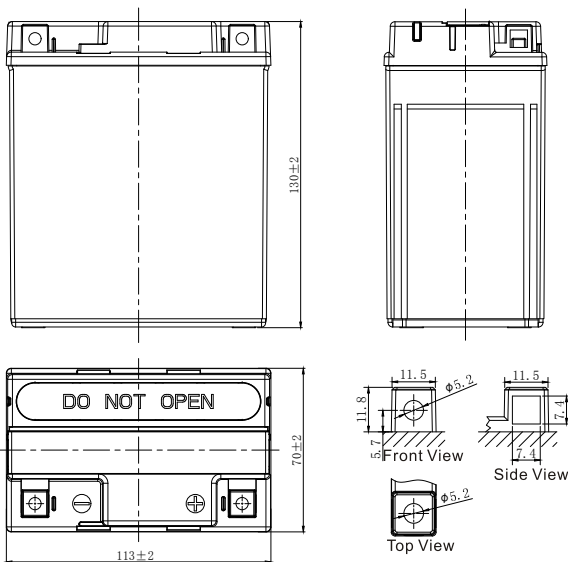

GENERAL FEATURES

- Sealed AGM battery
- Rest after filling acid
- Fresh Pack, Maintenance-Free

*Values are subject to variation of +/- 5% in normal manufacturing processes.

Leoch International Technology Ltd.
www.leoch.com

Leoch Batteries Pte Ltd
www.leoch.sg

Leoch Battery Corporation
www.leochamericas.com

Leoch Europe S.A.
www.leoch.eu

Data above is recommended and the picture is only for battery effect display, Leoch reserve the final right of explanation.
© LEOCH. All rights reserved. Trademarks and logos are the property of LEOCH and its affiliates unless otherwise noted. Subject to revisions without prior notice. E&OE.

CHARACTERISTICS

| Item | Specifications | |
|--------------------------------------------|-------------------------------------------------------------------------------------------------|------------------------------|
| Nominal Voltage | 12V | |
| Nominal Capacity (10HR) | 6Ah | |
| Cold Cranking Performance Amps@0°F (-18°C) | 95A | |
| Dimension (±2mm) | Length | 113mm (4.45inches) |
| | Width | 70mm (2.76inches) |
| | Container Height | 130mm (5.12inches) |
| | Total Height | 130mm (5.12inches) |
| Battery (with acid) | Approx Weight | 2.36kg (5.20lbs) |
| Electrolyte | Approx Weight | 0.44kg (0.970lbs) |
| Terminal type | | A |
| Battery type | Dry Charged Series | |
| Full Charge | Constant-Voltage Charge: | |
| | Initial charging current | Less than 0.3C ₁₀ |
| | Voltage | 14.40V~15.00V at 25°C (77°F) |
| | Charging time | 15~18h |
| | Constant-Current Charge: | |
| | Charging current 0.1C ₁₀ , when charging voltage up to 14.40V, continue to charge 4h | |
| Floating Charge | Initial charging current | Unlimited |
| | Voltage | 13.50V~13.80V at 25°C (77°F) |
| Capacity affected by Temperature | 40°C (104°F) | 106% |
| | 25°C (77°F) | 100% |
| | 0°C (32°F) | 86% |
| | -15°C (5°F) | 65% |

Discharge Characteristics (25°C, 77°F)

