


MAINTENANCE-FREE MOTORCYCLE BATTERY

EBZ12-4-1 (12V11Ah)

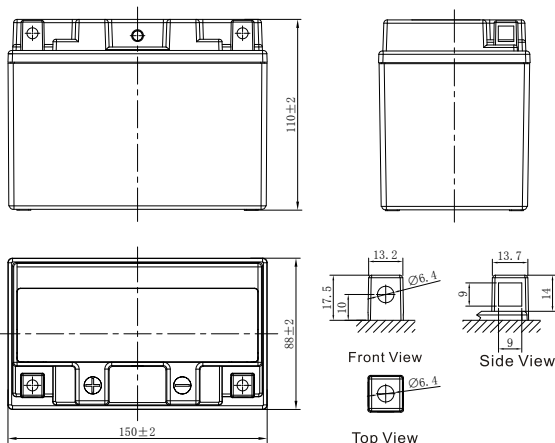

GENERAL FEATURES


- Maintenance-free
- Sealed and non-spillable AGM battery
- Shipped pre-charged and ready to install

*Values are subject to variation of +/- 5% in normal manufacturing processes.

CHARACTERISTICS

Item	Specifications
Nominal Voltage	12V
Nominal Capacity (10HR)	11Ah
Cold Cranking Performance Amps@0°F (-18°C)	210A
Dimension (±2mm)	Length 150mm (5.91inches)
	Width 88mm (3.46inches)
	Container Height 110mm (4.33inches)
	Total Height 110mm (4.33inches)
Battery (with acid)	Approx Weight 3.81kg (8.40lbs)
Terminal type	A
Battery type	Factory Activated Series
Full Charge	Constant-Voltage Charge:
	Initial charging current Less than 0.3C ₁₀
	Voltage 14.40V~15.00V at 25°C (77°F)
	Charging time 15~18h
	Constant-Current Charge:
	Charging current 0.1C ₁₀ , when charging voltage up to 14.40V, continue to charge 4h
Floating Charge	Initial charging current Unlimited
	Voltage 13.50V~13.80V at 25°C (77°F)
Capacity affected by Temperature	40°C (104°F) 106%
	25°C (77°F) 100%
	0°C (32°F) 86%
	-15°C (5°F) 65%

Discharge Characteristics (25°C, 77°F)

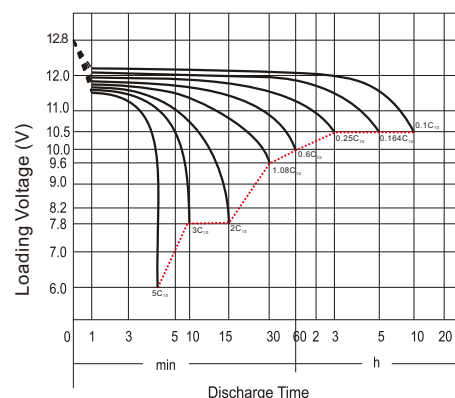

Leoch International Technology Ltd.

www.leoch.com

Leoch Batteries Pte Ltd

www.leoch.sg

Leoch Battery Corporation

www.leochamericas.com

Leoch Europe S.A.

www.leoch.eu

Data above is recommended and the picture is only for battery effect display, Leoch reserve the final right of explanation.

© LEOCH. All rights reserved. Trademarks and logos are the property of LEOCH and its affiliates unless otherwise noted. Subject to revisions without prior notice. E&OE.

Publication No.:LB-EBZ12-4-1-PD-EN-V1.0-20230804