

LPG SERIES-GEL Battery

LPG12-110 (12V110AH)



Specification

Nominal Voltage	12V	
Nominal Capacity(20HR)	110.0AH	
Dimension	Length	410±3mm (16.14 inches)
	Width	177±2mm (6.97 inches)
	Container Height	225±3mm (8.86 inches)
	Total Height (with Terminal)	225±3mm (8.86 inches)
Approx Weight	Approx 36.0 kg (79.37 lbs)	
Terminal	T11	
Container Material	ABS	
Rated Capacity	110.0 AH/5.50A	(20hr, 1.80V/cell, 25°C/77°F)
	105.0 AH/10.5A	(10hr, 1.75V/cell, 25°C/77°F)
	88.0 AH/17.6A	(5hr, 1.75V/cell, 25°C/77°F)
	76.5 AH/25.5A	(3hr, 1.75V/cell, 25°C/77°F)
	60.5 AH/60.5A	(1hr, 1.67V/cell, 25°C/77°F)
Max. Discharge Current	990A (5s)	
Internal Resistance	Approx 4.8mΩ	
Operating Temp. Range	Discharge	-20~55°C (-4~131°F)
	Charge	0~40°C (32~104°F)
	Storage	-20~50°C (-4~122°F)
Nominal Operating Temp. Range	25±3°C (77±5°F)	
Cycle Use	Initial Charging Current less than 27.5A. Voltage	
	14.4V~15.0V at 25°C(77°F)Temp. Coefficient -30mV/°C	
Standby Use	No limit on Initial Charging Current Voltage	
	13.5V~13.8V at 25°C(77°F)Temp. Coefficient -20mV/°C	
Capacity affected by Temperature	40°C (104°F)	103%
	25°C (77°F)	100%
	0°C (32°F)	86%
Self Discharge	Leoch LPG series batteries may be stored for up to 9 months at 25°C(77°F) and then a freshening charge is required. For higher temperatures the time interval will be shorter.	

Applications

- ◆ Telecommunications
- ◆ Solar system
- ◆ Wind power system
- ◆ Wheelchair
- ◆ Floor cleaning machines
- ◆ Golf trolley
- ◆ Boats



Constant Current Discharge (Amperes) at 25 °C (77°F)

F.V/Time	20min	30min	45min	1h	2h	3h	4h	5h	6h	7h	8h	9h	10h	20h
1.85V/cell	93.1	73.0	55.7	46.6	29.6	22.6	18.7	16.1	13.9	12.3	11.1	10.2	9.60	5.28
1.80V/cell	106.6	81.6	61.5	51.5	32.0	24.2	19.8	16.9	14.6	12.9	11.6	10.7	10.0	5.50
1.75V/cell	119.8	89.8	66.4	55.1	33.9	25.5	20.7	17.6	15.1	13.4	12.0	11.0	10.5	5.61
1.70V/cell	129.0	96.1	70.5	58.3	36.0	26.6	21.4	18.2	15.7	13.8	12.4	11.3	10.7	5.68
1.67V/cell	134.3	99.9	73.0	60.5	36.9	27.4	21.9	18.5	15.9	14.0	12.6	11.4	10.9	5.74
1.60V/cell	145.5	106.9	78.5	64.2	38.4	28.5	22.8	19.1	16.3	14.3	12.8	11.7	11.1	5.82

Constant Power Discharge (Watts/cell) at 25 °C (77°F)

F.V/Time	20min	30min	45min	1h	2h	3h	4h	5h	6h	7h	8h	9h	10h	20h
1.85V/cell	178.1	140.7	108.1	90.8	57.8	44.2	36.7	31.8	27.6	24.5	22.1	20.2	19.1	10.5
1.80V/cell	201.3	155.8	118.3	99.7	62.3	47.2	38.8	33.3	28.8	25.5	23.1	21.2	20.0	11.0
1.75V/cell	223.8	169.8	127.0	106.2	65.8	49.7	40.5	34.5	29.8	26.4	23.8	21.8	20.3	11.2
1.70V/cell	238.4	180.3	133.8	111.7	69.4	51.6	41.7	35.5	30.7	27.2	24.5	22.4	20.8	11.3
1.67V/cell	245.4	185.3	137.6	115.3	70.9	53.0	42.6	36.1	31.2	27.5	24.8	22.6	21.0	11.4
1.60V/cell	263.0	196.5	146.7	121.7	73.4	54.9	44.1	37.1	31.8	28.0	25.2	23.1	21.4	11.5




Specifications subject to change without notice.




Dimensions

T11 Terminal


Unit: mm [inches]

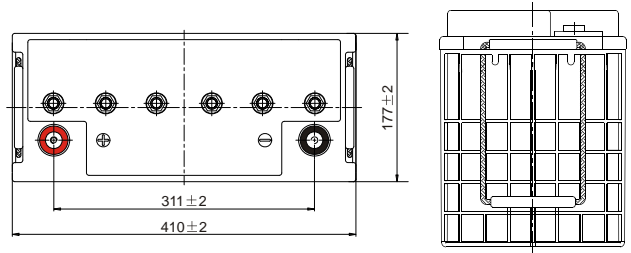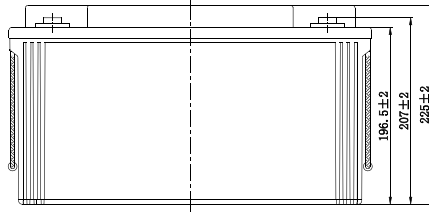


Discharge Characteristics

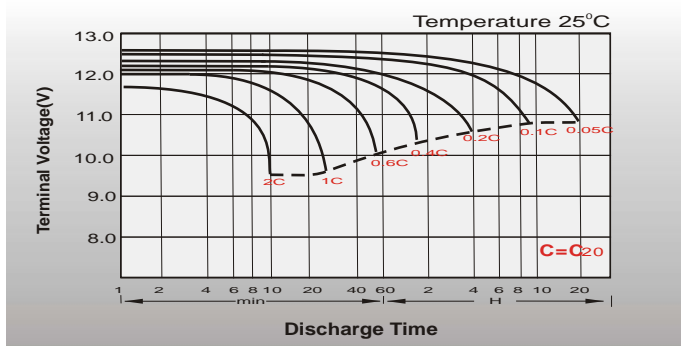


Float Charging Characteristics

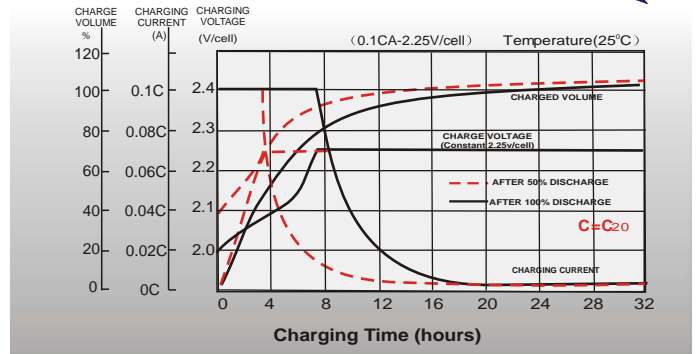


Temperature Effects in Relation to Battery Capacity

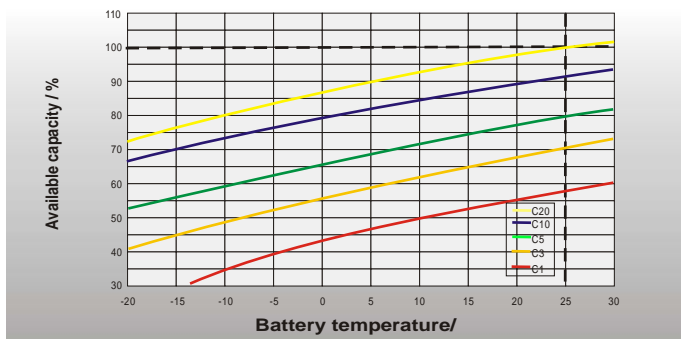


Effect of Temperature on Long Term Float Life

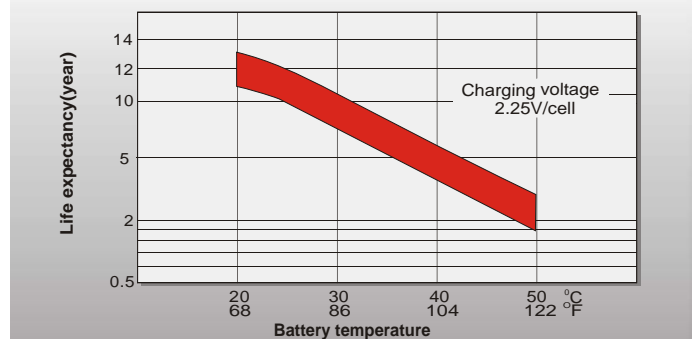

Cycle Life in Relation to Depth of Discharge

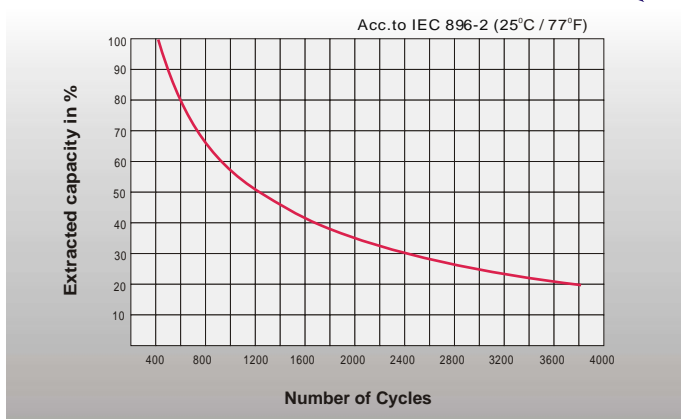

General Relation of Capacity VS. Storage Time

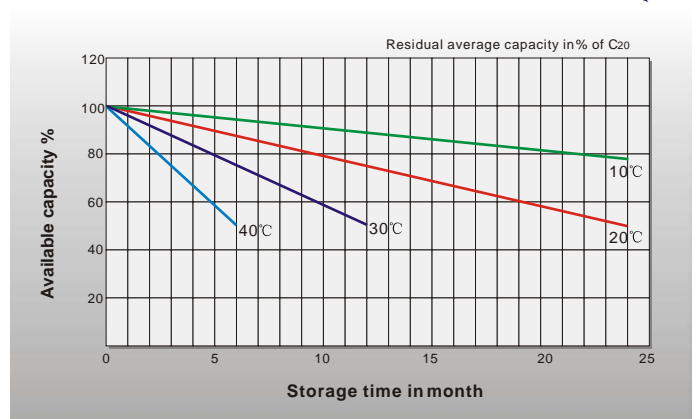

Sales Office

China sales office:
 Add: 5th Floor, Xinbaohui Bldg., Nanhai Blvd.,
 Nanshan, Shenzhen, China. 518052
 Tel: +86-755-86036060 (100 lines)
 Fax: +86-755-26067269
 E-mail: export@leoch.com
 Http://www.leoch.com

HongKong sales office:
 Add: Workshop C, 33/F, TML Tower,
 No. 3 Hoi Shing Road, Tsuen Wan,
 New Territories, Hong Kong
 Tel: +852 35786666
 Fax: +852 21170016
 E-mail: sales.hk@leoch.com

Singapore sales office:
 Add: No. 1 Tech Park Crescent,
 Singapore 638131
 Tel: +65 68416629
 Fax: +65 68443210
 Email: sales.sg@Leoch.com

North America sales office:
 Add: 19751 Descartes, Unit A,
 Foothill Ranch, CA 92610, USA
 Tel: 949-588-5853
 Fax: 949-588-5966
 E-mail: sales@leoch.us
 Http://www.leoch.com

Europe sales office:
 Add: 9B Wheatstone Court, Waterwells
 Business Park, Gloucester, GL2-2AQ,
 UK United Kingdom
 Tel: +44(0) 1452 729428 / 1452 729696
 Fax: +44 (0)1452-690125
 E-mail: Sales.Europe@leoch.com